

SPECIFICATIONS


SS-500NP-ML* CC DRIVER

Model: SS-500NP-ML*

Power: 500W

Rev.: V02


Release date: 2025-04-10

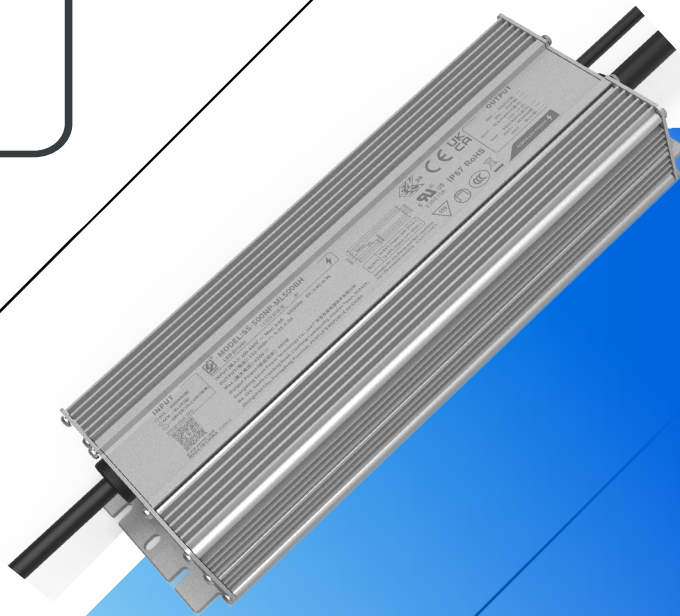

SS-500NP-ML Series LED Driver

Features

- Efficiency up to 97%
- Dimming: 0-10V,PWM,Resistor,Timing
- Surge protection: CM: 6kV, DM: 6kV
- AUX Power: 12V/0.3A
- Constant Lumen, Life Warning
- NTC
- Standby Power<0.5W
- IP67
- Communication with PC
- Protections: SCP/OTP/UVP/OPP
- Warranty: 5 years

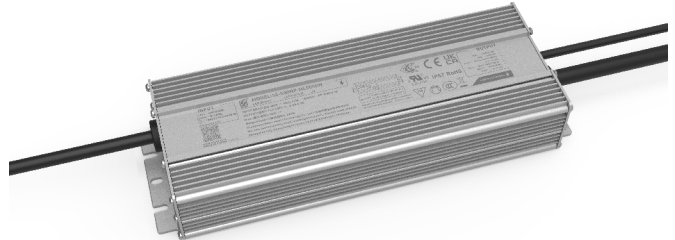

RoHS

IP67



UK
CA



Description

SS-500NP-ML500* is 500W non-isolated constant current LED Driver with 180-528Vac input and wide O/P voltage range and adjustable O/P current by program. LED luminaire manufactures can easily design luminaires and reduce cost.

Applications:

Horticulture lighting, Stadium lighting, Fish lighting

Model List:

Model	AC Input Range	Max. Pout	Vout Range	Full Power Vo Range	Iout	THD (Typ.)	PF(Typ.)	Eff.(Typ.)	Max.Tc
SS-500NP-ML500*	180-528Vac	500W	150-500V	252-500V	0.35-2.0A	10%	0.95	97%	90°C

Note:

1.Default Tested: at 400Vac, full load, Ta 25°C;

2.The performance of the LED Driver can be guaranteed within the full power Vo range. The voltage lower than full power Vo range, it is need to test the performance with the LED module ;

SS-500NP-ML Series LED Driver

“*” Means Additional Function

“*”	AUX 12V (suffix:H)	NTC (suffix:N)	Timing	0-10V/PWM Dim /Resistor (suffix:B)	Output- Ground	Remark
BH	✓		✓	✓		
BHN	✓	✓	✓	✓		
BH-G	✓		✓	✓	✓	
BHN-G	✓	✓	✓	✓	✓	

Input Characteristics:

Parameter	Min.	Typ.	Max.	Remark
Rated AC Input Range	200Vac		277Vac	<Ta:45°C
	277Vac		480Vac	<Ta:50°C
AC Input Range	180Vac		528Vac	
Input Frequency Range	47Hz	50/60Hz	63Hz	
Max Input Current			3.0A	200Vac
Max Input Power			600W	200Vac
Max Inrush Current(220Vac)			20A	Cold start
Max Inrush Current(347Vac)			25A	Cold start
Max Inrush Current(400Vac)			30A	Cold start
Max Inrush Current(480Vac)			35A	Cold start
Standby Power			0.5W	230Vac/50Hz, Dim-off
Power Factor	0.95	0.97		220Vac/50Hz, Full load
	0.90			200-480Vac, 70-100% load
THD		6%	10%	347Vac/60Hz, Full load
			20%	200-480Vac, 70-100% load

SS-500NP-ML Series LED Driver

O/P Characteristics:

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	150V		500V	Power derated @150-252V
Rated O/P Voltage	252V		500V	Po=Vo*Io=500W, Full load
Rated O/P Current	1.0A		2.0A	2.0A for 252V,1.0A for 500V
Adj. O/P Current (AOC)Range	0.35A		2.0A	Adjustable by program
No Load Voltage			600V	
Efficiency @220Vac	92.0%	94.0%		O/P 500V/1.0A
Efficiency @347Vac	94.0%	96.0%		O/P 500V/1.0A
Efficiency @400Vac	95.0%	97.0%		O/P 500V/1.0A
Efficiency @480Vac	95.0%	97.0%		O/P 500V/1.0A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			0.5S	230Vac,Full load,
Line Regulation	-2%		+2%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc:0°C~90°C
OTP	90°C		100°C	Drop current when OTP, and it can be automatically restored after the abnormality is removed.
Short Circuit Protection				Driver will not be damaged, Constant current mode

SS-500NP-ML Series LED Driver

Other Characteristics:

Parameter		Min.	Typ.	Max.	Remark
AUX Power	O/P Voltage	10.8V	12V	13.8V	
	O/P Current			300mA	
0-10V Dimming (Optional)	Dim Vmax	0V		12V	Negative dimming by programming Dimming prohibits reverse connection. DIM+ source current 110uA .
	Dim Range	10%loset		100%loset	
	Rec.Dim Range	0V		10V	
10-0V Dimming (Optional)	Rec.Dim Range	0V		10V	DIM+ Maximum sink current is 40uA Dimming prohibits reverse connection. 5-0V by programming
PWM Dimming	PWM High	9.8V		10.2V	
	PWM Low	0V		0.3V	DIM+ source current 110uA .
	Frequency	1KHz		2KHz	Dimming prohibits reverse connection.
	PWM Duty	0%		100%	
Resistor Dimming	Resistance	0Kohm		100Kohm	
	Dim Range	10%		100%	DIM+ source current 110uA .
0-10V Dim to Off	Dim off	7%	8%	9%	By DC voltage, PWM, resistance dimming ratio
	Dim on	8%	9%	10%	By DC voltage, PWM, resistance dimming ratio
NTC Founction(Optional)		By programming			External resistance value 10K Ω , B value 3950 or 3435 NTC thermistor, set parameters through corresponding programs
Timing Curve(Optional)		By programming			Set by program
Constant Lumen(Optional)		By programming			Set by program
Life Warning(Optional)		By programming			Set by program
Life Time($T_c \leq 75^\circ\text{C}$)		$\geq 50,000$ hours			80% Load, 400Vac
MTBF		198,800 hours			400Vac, Full load, $T_a = 25^\circ\text{C}$ (MIL-HDBK-217F)
IP Grade		IP67			
T_c		90°C			
Warranty		5 years			$T_c \ 75^\circ\text{C}$
Net Weight		1810g			
Dimension		252mm*89.5mm*44.5mm			L x W x H

NOTE: 1.All the parameters above are tested $T_a \ 25^\circ\text{C}$ and LED load, unless specified.

2.When using resistor dimming (parallel connection of dimming wires), if the number of parallels is:

N, the dimming resistor should be realized 0-100% dimming range, resistance value: $91K\Omega/N$.

SS-500NP-ML Series LED Driver

Environmental Requirements

Parameter	Min.	Typ.	Max.	Remark
Operating Temperature(Tcase)	-40℃	25℃	+90℃	
Storage Temperature	-40℃	25℃	+90℃	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4000m	

Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
UL/CUL	UL8750	✓	
ENEC	EN 61347-1 EN 61347-2-13 EN IEC62384	✓	
RCM	AS/NZS61347.2.13		
UKCA	EN 61347-1 EN 61347-2-13 EN 62493	✓	
CCC	GB19510.1:GB19510.14	✓	
CE	EN 61347-1 EN 61347-2-13 EN 62493	✓	

EMI/EMS	Criterion	Remark
Conduction Emission	EN IEC 55015	
Radiation Emission	EN IEC 55015	
Harmonic Current Emissions	IEC/EN 61000-3-2	Class C
Surge	IEC/EN61000-4-5	DM: 6kV,CM: 6kV,Criterion B
	ANSI/C82.77-5	DM: 6kV,CM: 6kV,Criterion B
Ring Wave	IEC/EN 61000-4-12;ANSI/C82.77-5	DM: 6kV,CM: 6kV,Criterion B

SS-500NP-ML Series LED Driver

Safety Test Items:


Safety Test Items	Technical Indicators			Remark
Insulation Requirements	UL Insulation Requirements	ENEC Insulation Requirements	CCC Insulation Requirements	
Input-Case	2U+1000	2U+1000	2U+1000	Basic insulation
Input-Dim	2U+1000	4U+2000	4U+2000	Reinforced insulation
Dim-Case	500Vac	500Vac	500Vac	Basic insulation
Insulation Resistance	$\geq 10M\Omega$			Input-DIM, Test voltage: 500Vdc
Ground Resistance	$\leq 0.1\Omega$			25A/1min
Leakage Current	$\leq 0.75mA$			480Vac

NOTE:

- 1.SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference as component.
- 2.Please short (ACL and ACN), (V+ and V-), (Dim+ and Dim - and Vaux+) when Hi-pot test (Turn off ARC) .
- 3.When applying withstand voltage to ground, the input and output wires are shorted together to withstand voltage to ground.

Performance Curves:

Input Inrush Current

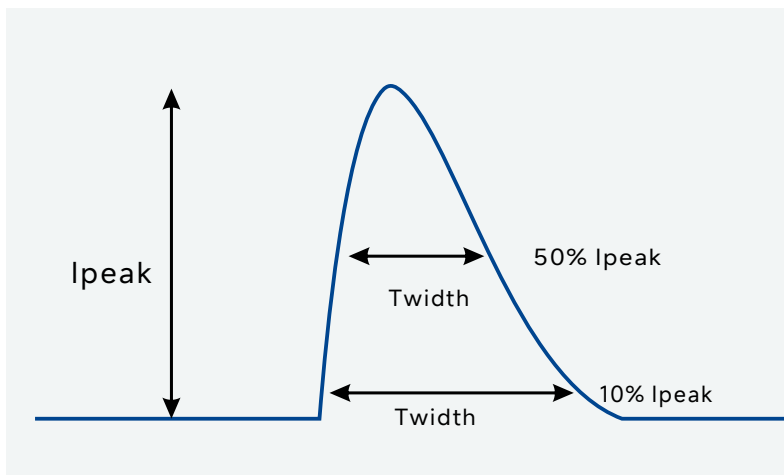


V_{in}	I_{peak}	T(@10% of I_{peak})	T(@50% of I_{peak})
220Vac	20A	6mS	3mS
347Vac	25A	7mS	4mS
400Vac	30A	7mS	4mS
480Vac	35A	8mS	5mS

SS-500NP-ML Series LED Driver

Performance Curves:


O/P Voltage Vs. O/P Current(Dim/AOC Window)

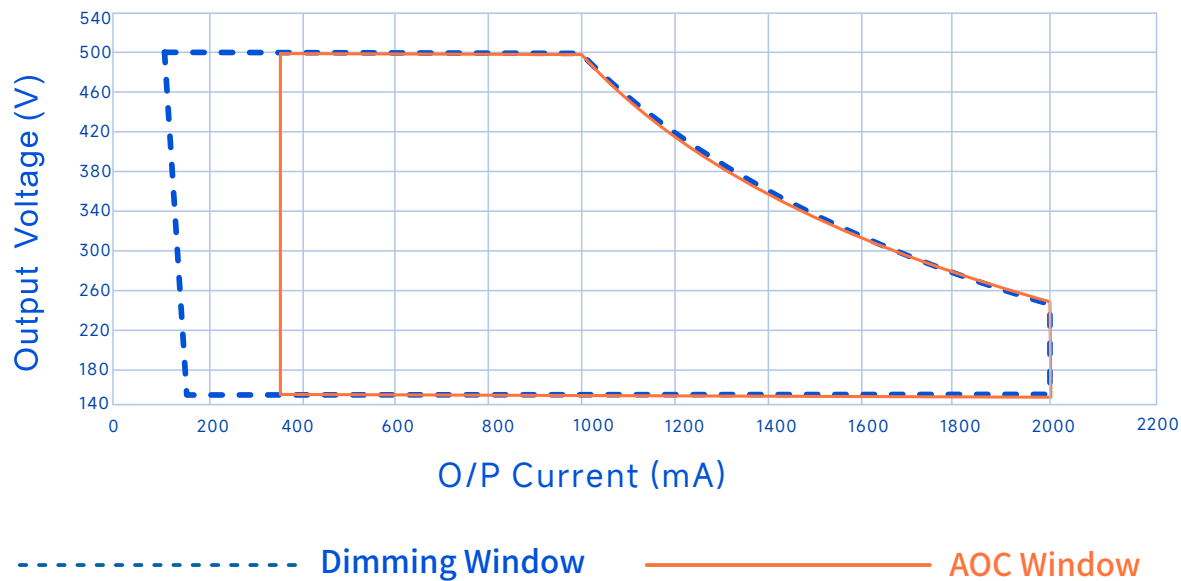


SS-500NP-ML Series LED Driver

Performance Curves:

Efficiency Vs. O/P Voltage (Vin=220Vac)

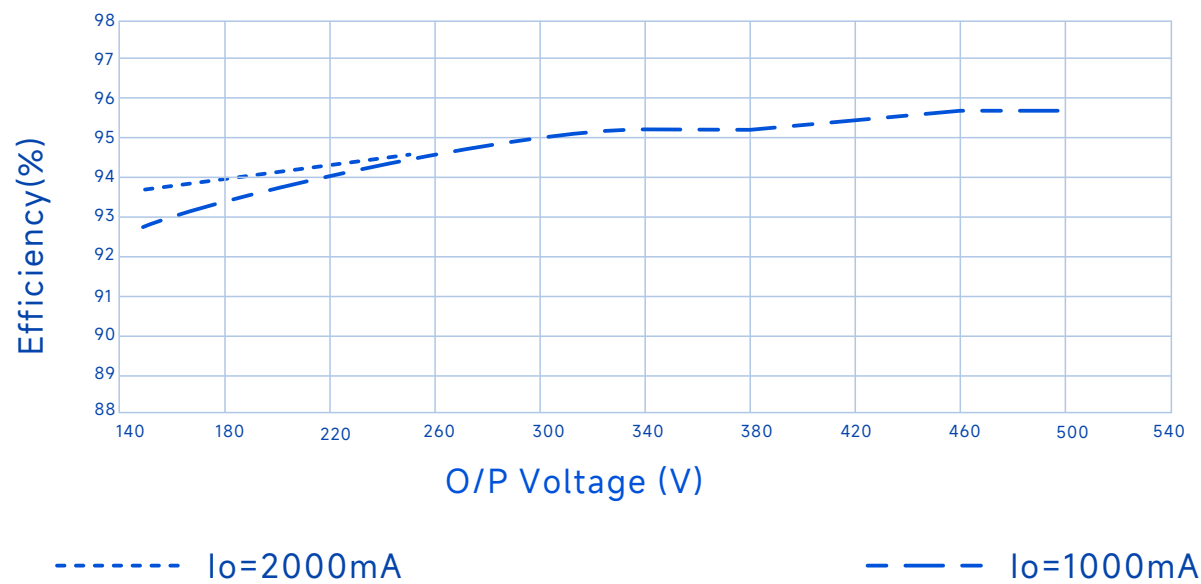


Efficiency Vs. O/P Voltage (Vin=347Vac)

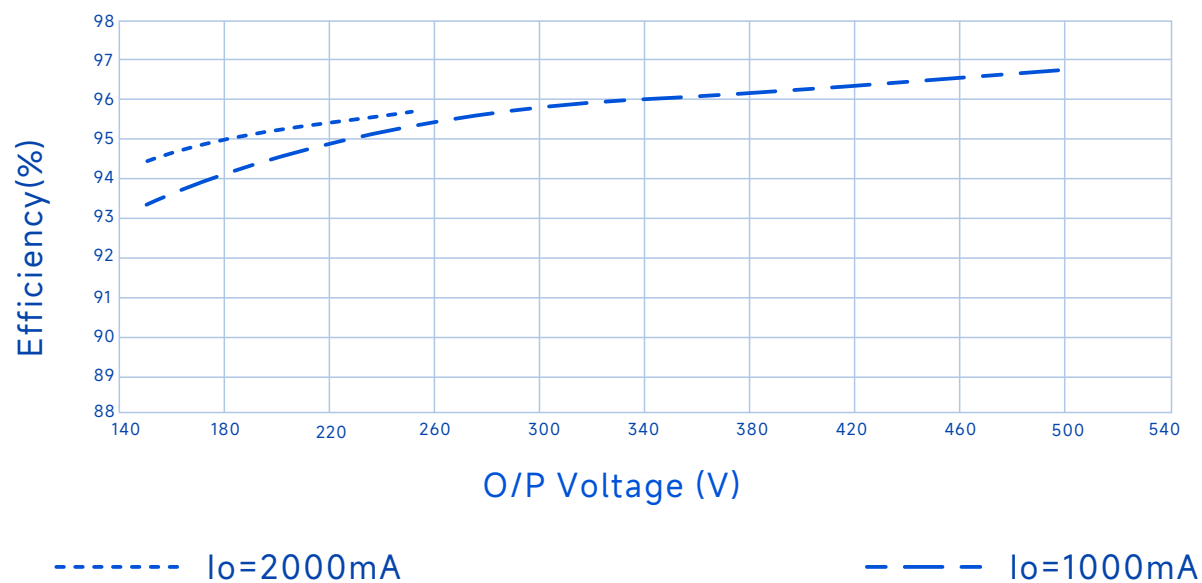


SS-500NP-ML Series LED Driver

Performance Curves:

Efficiency Vs. O/P Voltage (Vin=400Vac)

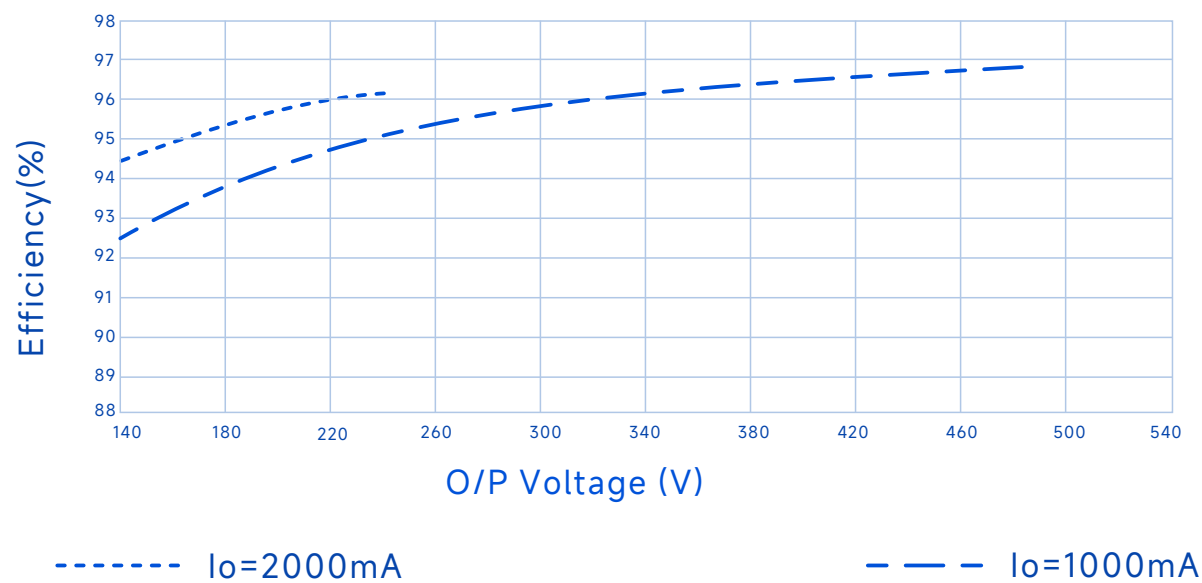


Efficiency Vs. O/P Voltage (Vin=480Vac)

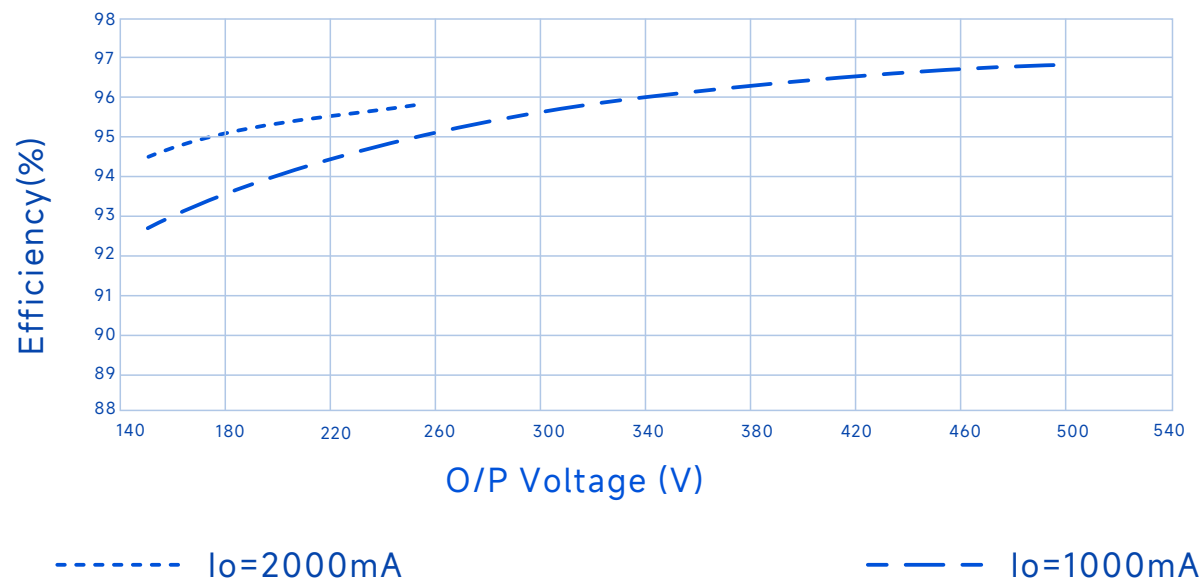


SS-500NP-ML Series LED Driver

Performance Curves:

Power Factor Vs. O/P Power

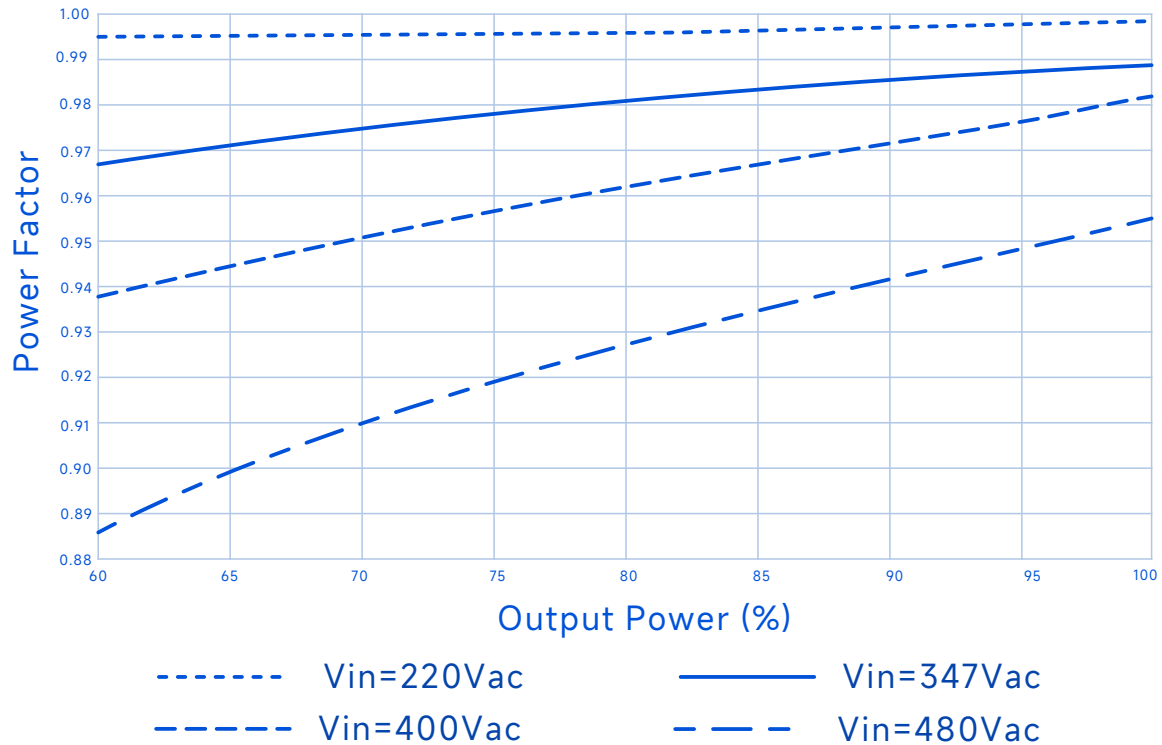


THD Vs. O/P Power

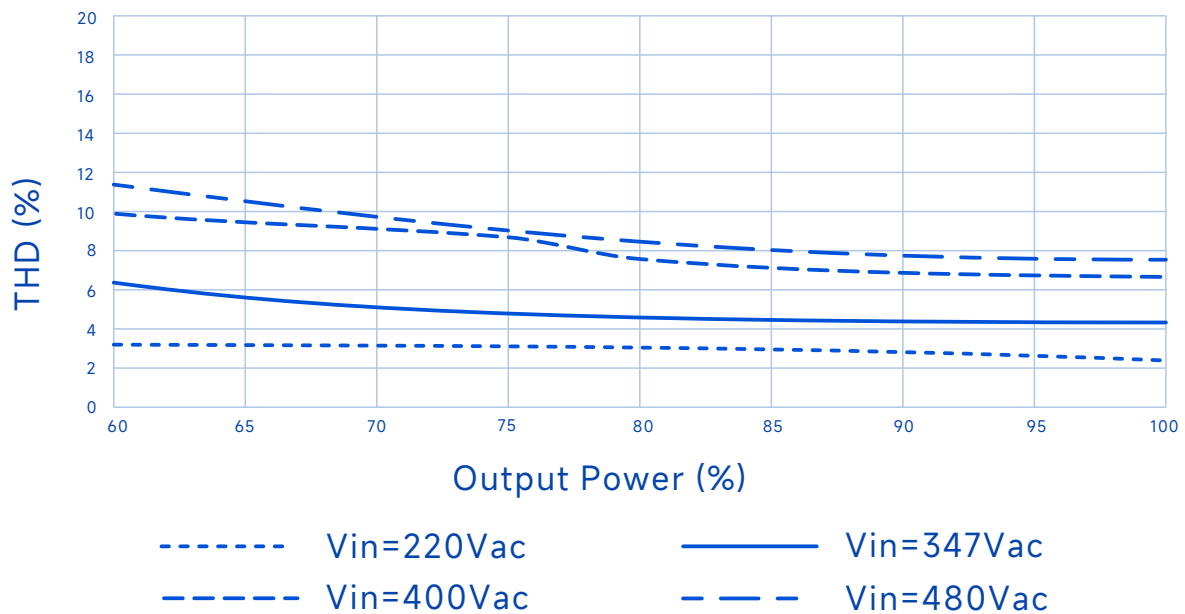


SS-500NP-ML Series LED Driver

Performance Curves:


O/P Power Vs. Input Voltage

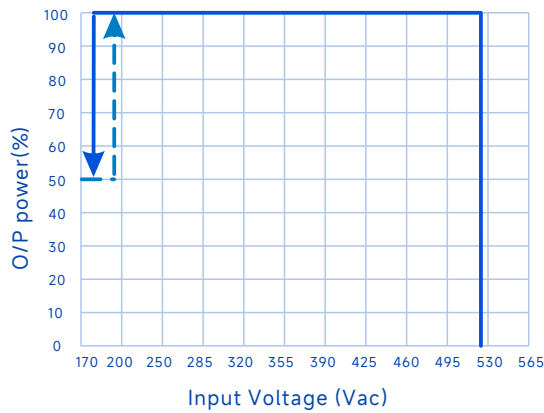


O/P Power Vs. Case Temperature

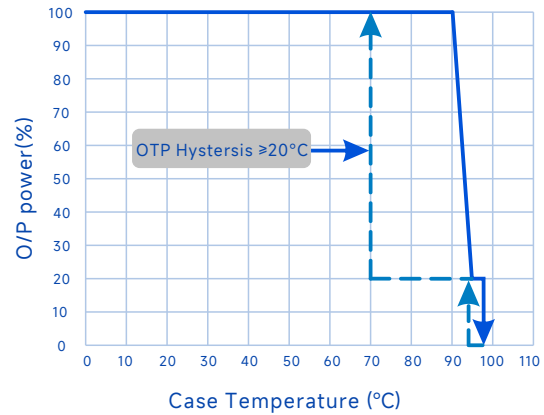

O/P Power Vs. Dimming

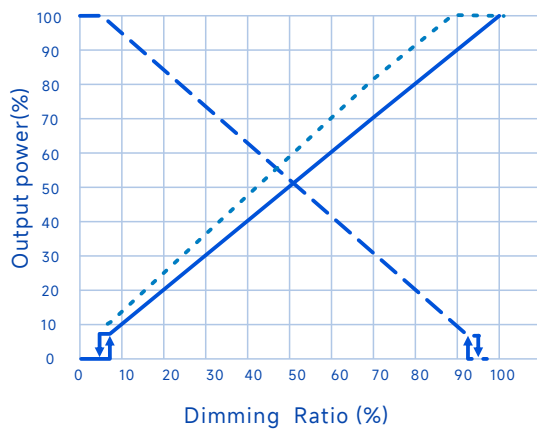

Life Time Vs. Case Temperature

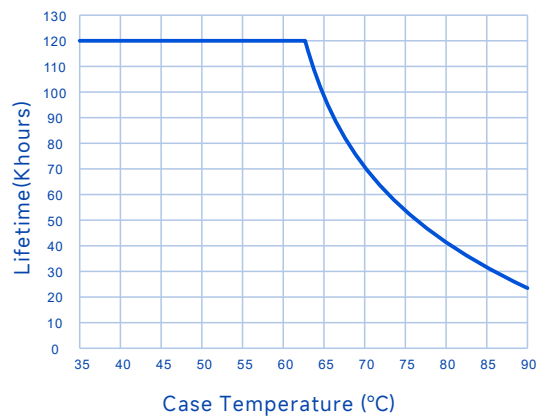

- 0-10V,PWM
- - - 10-0V
- Resistor Dimming

Constant Lumen Output


Constant Lumen Output are design to maintain fixture's stable output lumen by increasing driver's output current within driver's life span to counteract LED lumen degradation.

Programming connection diagram①

Legacy Timer: Driver's O/P follows the pre-programmed timing curve after turn-on.

Auto-Adjust by Percentage: Driver's O/P will be adjusted by automatically changed dimming curve by the period percentage based on the latest 5 dimming curve.

Auto-Adjust by Mid-point: Driver's O/P will be adjusted by automatically changed dimming curve by mid-point based on the latest 5 dimming curve.

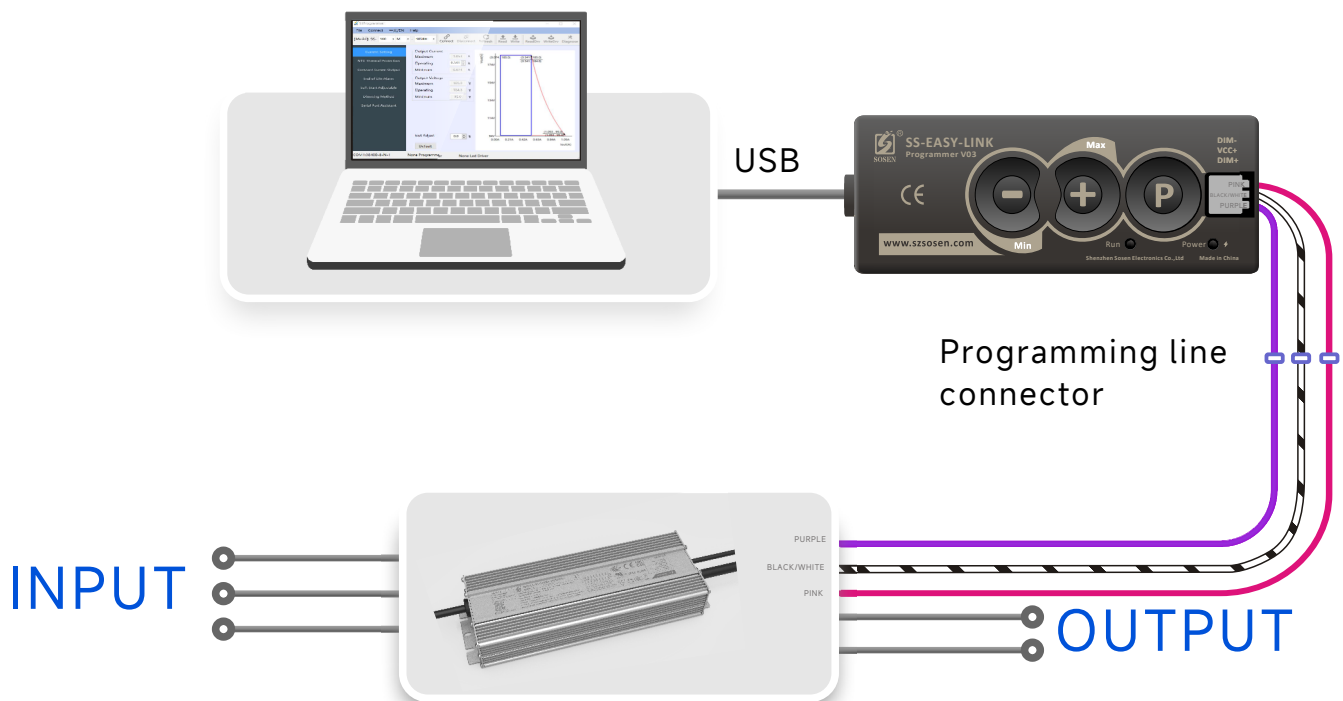

Note: 1. Programming could be completed by off-line mode either without turn on the driver nor without PC, other than the traditional on-line mode.


SS-500NP-ML Series LED Driver

Parameter			Remark
Default setting	Positive logic dimming (0-10V)	Dimming voltage default 10V (source current)	Factory Default Model
	Negative logic dimming (10-0V)	Dimming voltage default 0V (sink current)	Optional
Dimming optional function	Positive logic dimming (0-10V)	Dimming voltage default 0V (sink current) Resistance dimming not available	When the dimming wire is not connected, the LED driver is not output
			For parallel dimming applications with multiple LED drivers, it is recommended to use the sink current mode (to be noted in the order)

Note:


Select "Dimming voltage defaults to 10V (source current)" / "Dimming voltage defaults to 0V (sink current)", which needs to be set according to the dimmer used by the end user.

Settings Interface

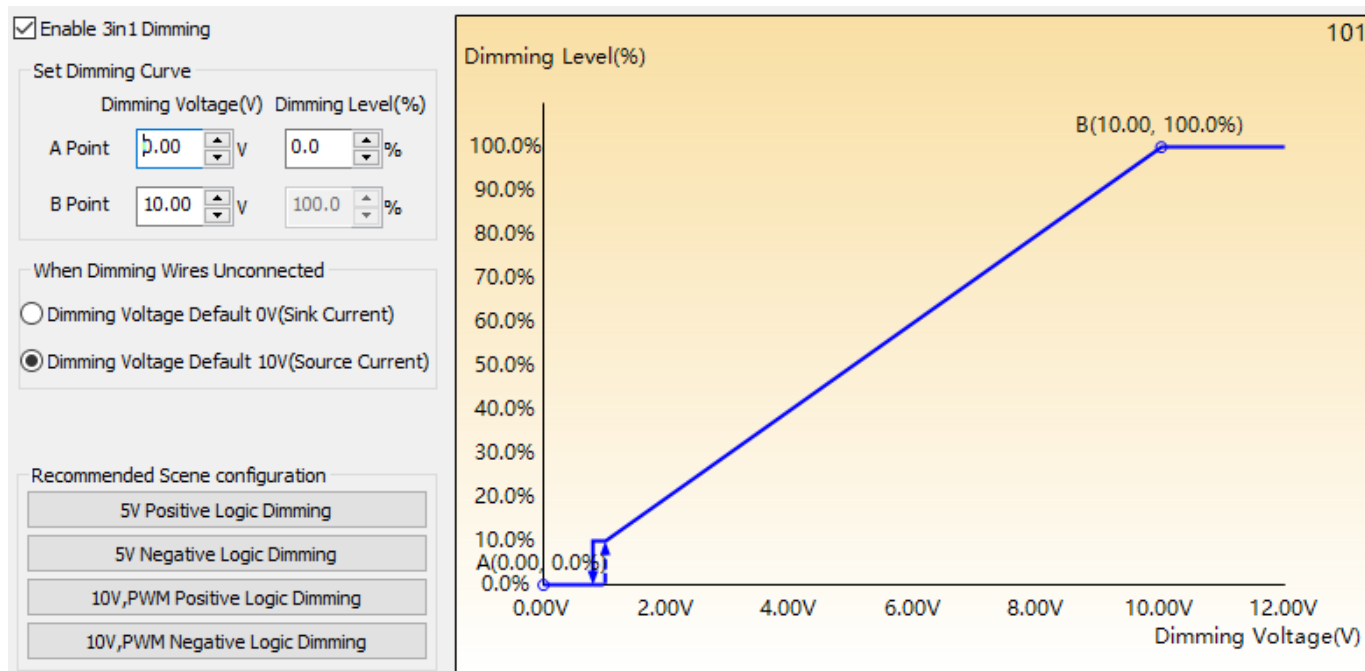

SS-500NP-ML Series LED Driver

Mechanical Characteristics

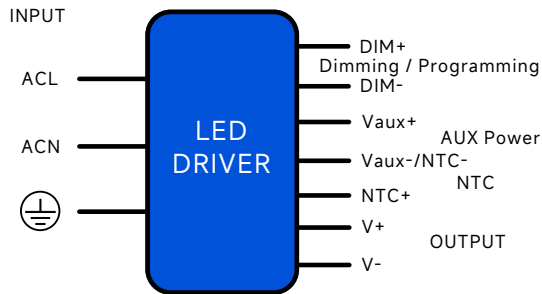

AC Input Cable(Exposed Length 450±10mm):

Global model: SOOW,3*17AWG,O.D: 9.8mm,Brown:L,Blue:N,Yellow/Green:⏏

DC O/P Cable(Exposed Length 250±10mm):

Global model: SOOW,2*17AWG,O.D: 9.3mm,Brown:V+ Blue:V-

Global model:SOOW,3*17AWG,O.D:9.8mm,Brown:V+,Blue:V-,

Yellow/Green:GND(Suffix-G)⏏

BH Model

DIM/AUX Power/Programming Cable (Exposed Length 220±10mm):

UL model: 21996, 4*22AWG , O.D: 5.6mm Purple DIM+, Pink: DIM-,

Black/White: Vaux+, Blue/White: Vaux-

BHN Model

DIM/AUX Power/Programming/NTC Cable (Exposed Length 220±10mm):

UL model: 21996, 5*22AWG , O.D: 6.0mm Purple DIM+, Pink: DIM-,

Black/White: Vaux+, Blue/White: Vaux-/NTC-, Red/White: NTC+

SS-500NP-ML Series LED Driver


Mechanical Characteristics

Name Description	Standard Code	mm(In.)
Case Length	L3	225(8.86)
Case Width	W1	89.5(3.52)
Case Height	H	44.5(1.75)
Overall Length	L1	252(9.92)
Mounting Hole Length	L2	238.5(9.39)
Mounting Hole Width	W2	40(1.57)
TC Point Position	X	90(3.54)
TC Point Position	Y	50(1.97)

Note

1.Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.

2.AC Input Cable,DC O/P Cable,DIM/AUX Power/Programming Cable:
Peeled length of cable:43±5mm, Tinned length of wire:10±2mm

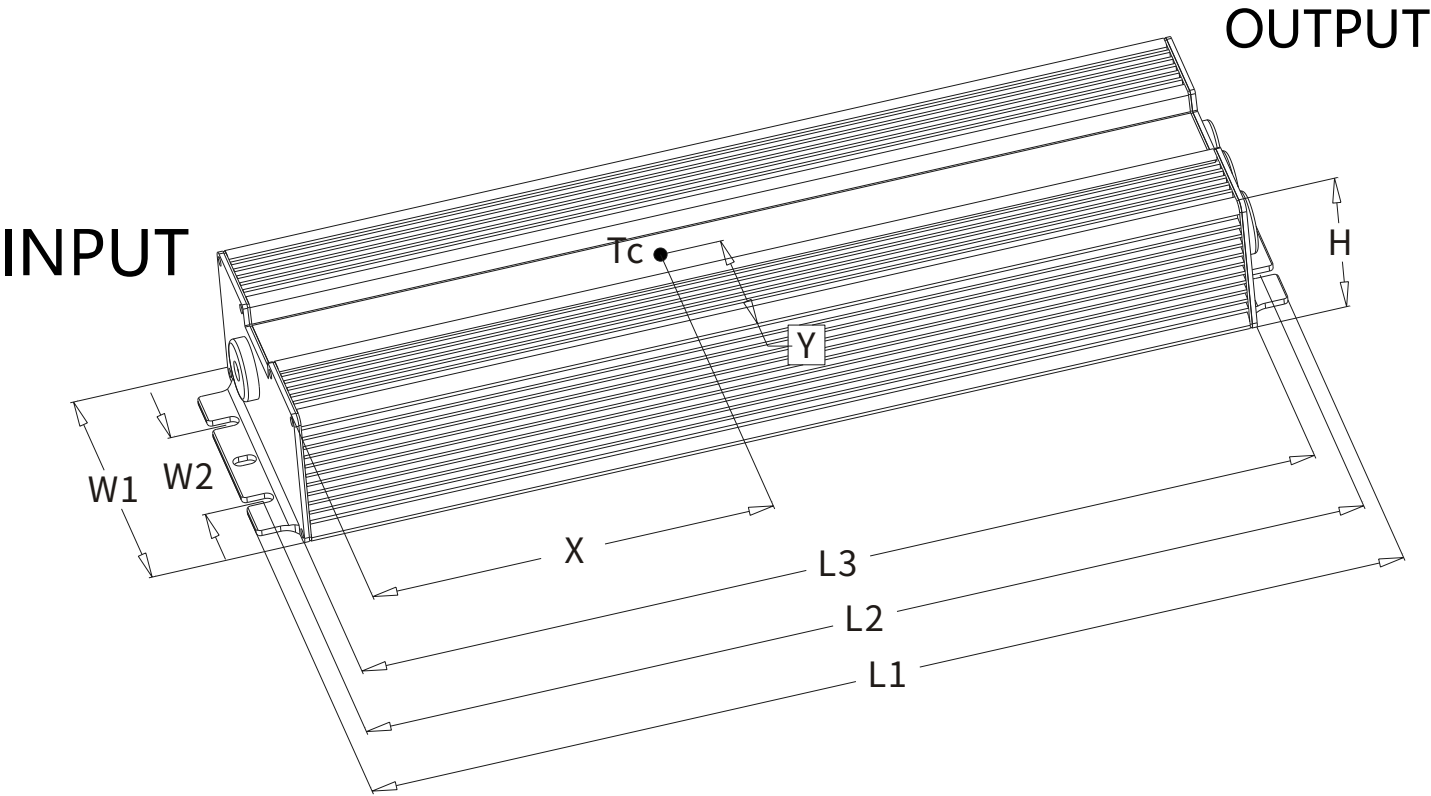

SS-500NP-ML Series LED Driver



Assembly Tips

1. Dimming or AUX Power tinned connectors should be capped if not used to avoid dimming or AUX Power parts damage from external signals.
2. Safety space between aluminum base and LED coppers $>5.6\text{mm}$.
3. Safety space/coppers between LED+ and LED- $\geq 3.6\text{mm}$.
4. Minimize the copper area on the aluminum PCB to reduce parasitic capacitance and leakage current.
5. It is recommended to design LED beads in parallel first and then in series.
6. The insulation level of LED light panels should meet the reliability design requirements.
7. It's recommended to add resistors or capacitors in parallel with the LED on PCB to reduce the risk of surge when a non isolated LED driver is used for the luminaire.
8. For other precautions, please refer to the "LED Driver User Manual".

Package

- Outside carton dimension: $L \times W \times H = 495\text{mm} \times 385\text{mm} \times 162\text{mm}$;
- 6PCS/Carton;
- Net weight/Piece: 1.81kg; Gross weight/Carton: 12.3kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

Storage

The product storage meets the standard of the GB 3873—83.
Products should be rechecked if stored for over 1 year before assembly.

RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

Revision History

Version	Description of Update	Updated Date	Remark
V00	Original Release	2024/12/25	
V01	Increase the OTP offset, and the voltage drop curve becomes linear.	2025/03/25	
V02	Version upgrade	2025/04/10	