



Wechat



Linkedin



Website



Scan to get online
Product Catalog



**SHENZHEN SOSEN
ELECTRONICS CO.,LTD**

10F, Pengzhanhui No 1 Building, Zhongxin Road No 233,
Xinqiao Street, Baoan District, Shenzhen, China.

+86-755-29358800 www.sosen.com

North America info.usa@sosen.com	Europe info.eu@sosen.com
Middle East info.middleeast@sosen.com	South America info.latam@sosen.com
Southeast Asia info.southeastasia@sosen.com	China info.china@sosen.com

POWER YOUR VISION






Shenzhen SOSEN Electronics Co., Ltd., established in 2011, is a global high-tech enterprise integrating the R&D, manufacturing, and sales of medium and high-power LED drivers. SOSEN's products are widely used in outdoor, industrial, horticultural, and sports lighting, among other fields. SOSEN launched an IPO and was listed on the stock market with the stock code 301002.


SOSEN independently masters several core LED driver technologies and operates an enterprise technology center. As of the end of June 2025, SOSEN and its subsidiaries have 193 authorized patents and more than 420 product certifications including CCC, UL, ENEC, TUV, RCM, PSE, KC, EAC., etc.

Headquartered in Shenzhen, China, SOSEN operates an intelligent manufacturing base spanning over 70,000 square meters in Zhongshan, Guangdong Province. SOSEN has subsidiaries in Hong Kong, Europe, North America, and Southeast Asia, and its marketing network covers most parts of the world. With accurate and rapid responses to market demand, continuous R&D innovation, and excellent product quality, SOSEN has enjoyed a high reputation both domestically and internationally.

Adhering to the product philosophy of "technological innovation, reliability, and energy efficiency," SOSEN will continue to develop highly energy-efficient, stable, and reliable LED drivers and technical solutions. Simultaneously, it will vigorously expand into the new energy industry, driving new transformations in the sector through technological strength.

POWER YOUR VISION

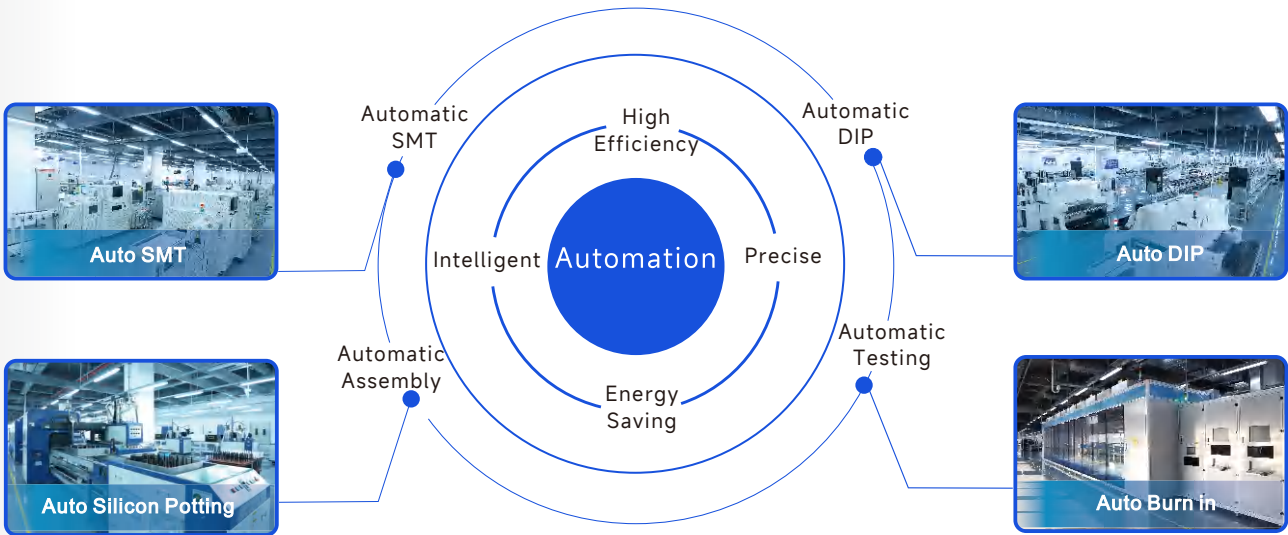

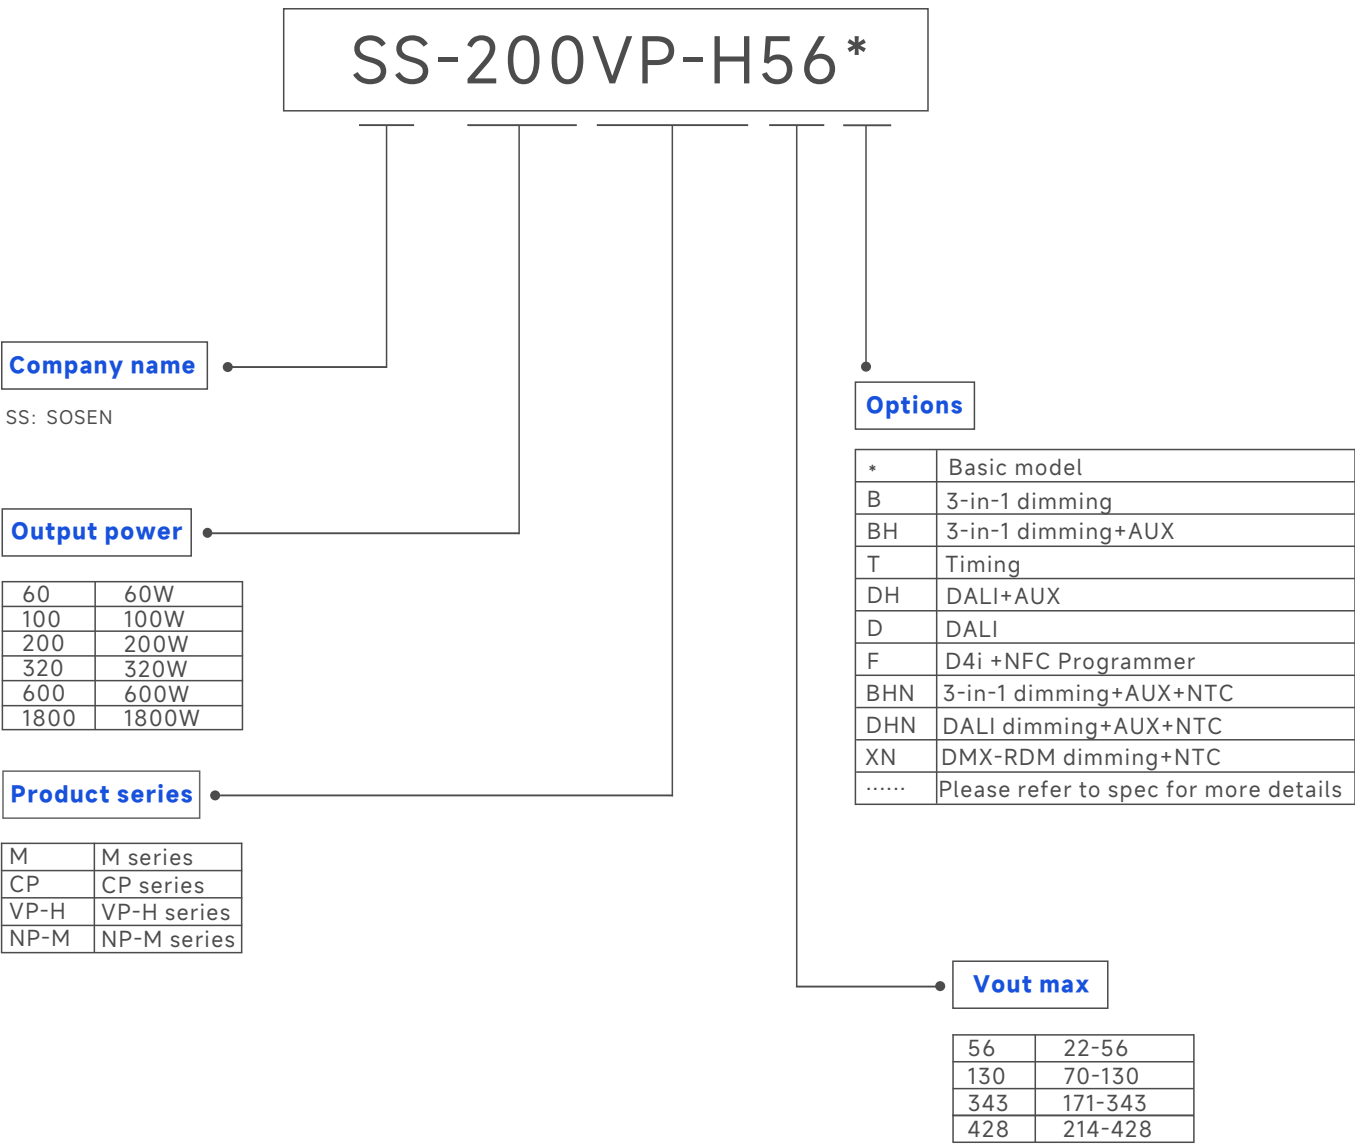

Application	Outdoor	Horticulture	Sports	Industrial	Commercial	Accessories
Series	VH-E VH-E AUX VH-A VH-P VH VA VP VP-H GA-E PA EP-M M MS AX	VP VP-H VP-E VP-G M MS L-N RUN RUN-M NP NP-M NP-ML	VP MS NP NP-M NP-ML	CNH CNH-G SNH CNL-E CNS SA CA CP CF	NH-V NM-V NH-E NS L-E EP-M	DMXRC OPXS SPD

SERIES	Features	Page
VH-E	40-240W, 100-277Vac, 3-in-1 dimming, IP67	5
VH-E AUX	50-320W, 100-277Vac, 0-10V/PWM/Resistor dimming, IP66/IP67	7
VH-A	25-250W, 100-277Vac, 3-in-1 dimming, IP67, Class I/Class II	9
VH-P	25-60W, 100-277Vac, 3-in-1 dimming, IP65, Class I/Class II	11
VH	75-240W, 100-277Vac, 3-in-1 dimming, IP67	13
VA	25-240W, 100-277Vac, 3-in-1 dimming(1-10V), IP67	15
GA-E	30-250W, 100-277Vac, 3-in-1/DALI-2 dimming, IP67, Class I/Class II	17
PA	22-220W, 220-240Vac, 3-in-1/D4i dimming, IP20, Class I/Class II	19
EP-M	55-190W, 120-347Vac, 3-in-1 dimming, Class 2, AUX:12V	21
VP	50-1500W, 100-277Vac, 3-in-1/DALI-2 dimming, AUX:12V, IP67	23
VP-H	200-880W, 100-277Vac, 3-in-1/DALI-2 dimming, AUX:12V, IP67	25
M	100-1000W, 200/220/277-480Vac, 3-in-1 dimming, AUX:12V, IP67	27
MS	50-1200W, 200-480Vac, 3-in-1/DALI-2 dimming, AUX:12V, IP66/IP67	29
AX	Constant Voltage, 50-350W, 120-277Vac, IP67	31
VP-E	600-1000W, 120-277Vac, 3-in-1 dimming, IP67	33
VP-G	730-1200W, 200-277Vac, 3-in-1/DALI-2 dimming, IP67	35
L-N	Non-isolated, 650-1000W, 200-277Vac, 3-in-1 dimming, IP67	37
RUN	Slim, Non-isolated, 400/600W, 100-277Vac, 3-in-1 dimming, IP67	39
RUN-M	Slim, Non-isolated, 400/600W, 200-480Vac, 3-in-1 dimming, IP67	41
NP	Non-isolated, 500-1200W, 100-277Vac, 3-in-1 dimming, IP67	43
NP-M	Non-isolated, 680-1200W, 200-480Vac, 3-in-1/DALI-2/DMX dimming, IP67	45
NP-ML	Non-isolated, 500-1600W, 200-480Vac, 3-in-1 dimming, IP67	47
CNH	Circle, Non-isolated, 100-320W, 100-277Vac, DIP switch power/CCT, 3-in-1/Timing dimming, IP65	49
CNH-G	Circle, Non-isolated, 100-240W, 90-264Vac, IP65	51
SNH	Circle, Non-isolated, 100-320W, 120-347Vac, DIP switch power/CCT, 3-in-1/Timing dimming, IP65	53
CNL-E	Circle, Non-isolated, 80-240W, 120-277Vac, DALI-2 dimming, IP65	55
CNS	Circle, Non-isolated, 120-320W, 277-480Vac, DIP switch power/CCT, 3-in-1 dimming, IP65	57
SA	Circle, 100-240W, 277-480Vac, 3-in-1 dimming, IP65	59
CA	Circle, 100-480W, 100-277Vac, 3-in-1/DALI-2 dimming, IP65	61
CP	Circle, 100-240W, 120-277Vac, 3-in-1 dimming, IP65	63
CF	Circle, Explosion proof driver, 40-120W, 100-240Vac, 3-in-1 dimming, IP65	65
NH-V	Non-isolated, 80-320W, 100-277Vac, Connector, Smart programming	67
NM-V	Non-isolated, 80-320W, 120-347Vac, Connector, Smart programming	69
NH-E	Non-isolated, 60-320W, 120-277Vac, DALI-2 dimming	71
NS	Non-isolated, 120-320W, 277-480Vac, DIP switch power/Sensor, 3-in-1 dimming	73
L-E	80/100W, 120-277Vac, 3-in-1 dimming	75
DMXRC	DMX decoded and converted to 0-10V analog dimming signal	77
OPXS	OPX	77
SPD	10kV/20kV Surge Protection, 100-277Vac	78

VH-E Series-----40-240W, 100-277Vac, 0-10V/PWM/Resistor dimming, IP67



Features

- ▶ Input voltage:100-277Vac
- ▶ Efficiency up to 94.5%
- ▶ Flicker free
- ▶ Programmable(AOC, CLO, SSA, ELA)
- ▶ 10kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming
- ▶ Positive or negative logic dimming
- ▶ Dim to off
- ▶ Type HL, suitable for hazardous locations
- ▶ Protections: SCP/OTP/OVP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

40W 60W 75W 100W 150W 200W 240W


Applications

Street light, Wallpack, Flood light, Tunnel light

Certificates



Dimension

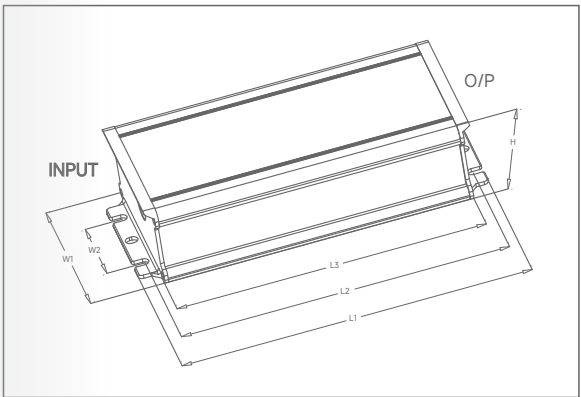

Units : mm

Model	L1	L2	L3	W1	W2	H
40VH-E	105	100	92	66	32	31.5
60VH-E	118	111	101	66	32	31.5
75/100VH-E	145	136	128	66	32	35
150/200VH-E	165	156	148	66	32	37
240VH-E	180	171	163	66	32	37

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
40	SS-40VH-E54B	27-54	0.10-1.10	86.0%	0.97	105*66*31.5
40	SS-40VH-E72B	36-72	0.10-0.80	86.5%	0.97	105*66*31.5
60	SS-60VH-E54B	27-54	0.35-1.67	87.5%	0.97	118*66*31.5
60	SS-60VH-E86B	43-86	0.35-1.10	87.5%	0.97	118*66*31.5
75	SS-75VH-E72B	36-72	0.35-1.50	91.0%	0.97	145*66*35
75	SS-75VH-E108B	54-108	0.1-1.05	91.0%	0.97	145*66*35
100	SS-100VH-E95B	48-95	0.35-1.50	91.0%	0.98	145*66*35
100	SS-100VH-E143B	72-143	0.1-1.05	91.0%	0.98	145*66*35
100	SS-100VH-E286B	143-286	0.1-0.55	91.0%	0.98	145*66*35
150	SS-150VH-E56B	28-56	0.7-4.2	93.0%	0.98	165*66*37
150	SS-150VH-E143B	72-143	0.35-1.50	93.5%	0.98	165*66*37
150	SS-150VH-E215B	108-215	0.1-1.05	94.0%	0.98	165*66*37
150	SS-150VH-E286B	143-286	0.1-0.7	94.0%	0.98	165*66*37
200	SS-200VH-E56B	28-56	0.7-5.6	93.0%	0.98	165*66*37
200	SS-200VH-E143B	72-143	0.35-2.10	94.5%	0.98	165*66*37
200	SS-200VH-E191B	95-191	0.35-1.50	94.5%	0.98	165*66*37
200	SS-200VH-E286B	143-286	0.1-1.05	94.5%	0.98	165*66*37
240	SS-240VH-E56B	28-56	0.7-6.7	94.0%	0.98	180*66*37
240	SS-240VH-E229B	114-229	0.35-1.50	94.5%	0.98	180*66*37
240	SS-240VH-E343B	171-343	0.1-1.05	94.5%	0.98	180*66*37

Note: B, 0-10V/PWM/Resistor dimming
Please refer to spec for more details.

VH-E AUX Series---50-320W, 100-277Vac, 0-10V/PWM/Resistor dimming, IP66/IP67



Features

- ▶ Input voltage:100-277Vac
- ▶ Efficiency up to 94%
- ▶ Constant Current, flicker free
- ▶ Programmable (AOC, CLO, SSA, ELA)
- ▶ 10kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming, dim to off
- ▶ Positive or negative logic dimming
- ▶ AUX: 12Vdc
- ▶ Dim-to-Off with Standby Power ≤ 0.5W
- ▶ Class 2 (<100W) / Class P
- ▶ Protections: SCP/OTP/OVP/OPP
- ▶ Type HL, suitable for hazardous locations
- ▶ IP66/IP67
- ▶ 5 years warranty

Power Levels

50W 75W 100W 150W 200W 240W 320W


Applications

Street light, High mast light, Fish light, Horticulture light, Sports light

Certificates



Dimension

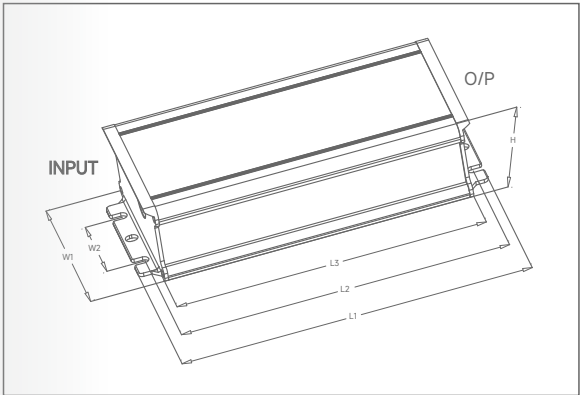

Units : mm						
Model	L1	L2	L3	W1	W2	H
50VH-E	122	113	105	66	27	35
75VH-E	143	134	126	66	27	35
100VH-E	149	140	132	66	27	35
150VH-E	179	170	162	66	27	37
200VH-E	189	180	172	66	27	37
240VH-E	219	210	202	66	27	37
320VH-E	243	235	226	76.5	50	38.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
50	SS-50VH-E54BH	18-54	0.35-1.5	91.0%	0.96	122*66*35
75	SS-75VH-E54BH	18-54	0.35-2.2	91.5%	0.96	143*66*35
100	SS-100VH-E54BH	18-54	0.35-2.8	92.0%	0.96	149*66*35
150	SS-150VH-E56BH	18-56	0.35-4.2	93.5%	0.96	179*66*37
200	SS-200VH-E56BH	18-56	0.7-5.6	93.5%	0.96	189*66*37
240	SS-240VH-E56BH	18-56	0.7-6.7	93.5%	0.96	219*66*37
320	SS-320VH-E56BH	18-56	0.7-8.0	94.0%	0.96	243*76.5*38.5

Note: BH, 0-10V/PWM/Resistor dimming+AUX
Please refer to spec for more details.

VH-A Series-----25-250W, 100-277Vac, 0-10V/PWM/Resistor dimming, IP67, Class I/Class II



Features

- ▶ Input voltage:100-277Vac
- ▶ Efficiency up to 94.5%
- ▶ Flicker free(≥75W)
- ▶ Programmable(AOC, CLO, SSA, ELA)
- ▶ 10kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming
- ▶ Positive or negative logic dimming
- ▶ Dim to off
- ▶ Class I/Class II
- ▶ Protections: SCP/OTP/OVP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

25W 40W 60W 75W 100W 150W 200W 250W


Applications

Street light, Tunnel light, Flood light, High mast light, Highbay

Certificates



Dimension

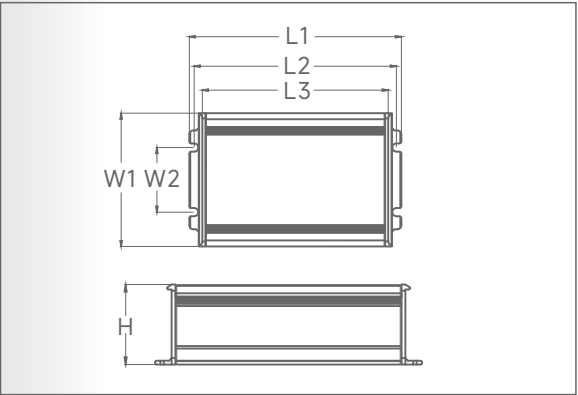

Units: mm

Model	L1	L2	L3	W1	W2	H
25/40/60VH-A	105	100	92	66	32	31.5
75/100VH-A	138	129	121	66	32	35
150VH-A	165	158	149	66	32	35
200VH-A	165	158	149	66	32	37
250VH-A	180	171	163	66	32	37

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
25	SS-25VH-A62*	30-62	0.1-0.66	87.0%	0.97	105*66*31.5
40	SS-40VH-A62*	30-62	0.35-1.05	88.0%	0.97	105*66*31.5
60	SS-60VH-A54*	27-54	0.35-1.67	89.0%	0.97	105*66*31.5
60	SS-60VH-A86*	43-86	0.35-1.1	90.0%	0.97	105*66*31.5
75	SS-75VH-A62*	30-62	0.35-2.1	88.5%	0.97	138*66*35
75	SS-75VH-A108*	54-108	0.1-1.05	90.5%	0.97	138*66*35
100	SS-100VH-A62*	30-62	0.35-2.85	90.0%	0.97	138*66*35
100	SS-100VH-A143*	71-143	0.1-1.05	91.0%	0.97	138*66*35
150	SS-150VH-A62*	30-62	0.35-3.75	92.0%	0.97	165*66*35
150	SS-150VH-A215*	107-215	0.1-1.05	94.0%	0.97	165*66*35
200	SS-200VH-A62*	30-62	0.7-5.0	93.0%	0.97	165*66*37
200	SS-200VH-A286*	143-286	0.1-1.05	94.5%	0.97	165*66*37
250	SS-250VH-A358*	179-358	0.1-1.05	94.5%	0.97	180*66*37

Note: *=B, 0-10V/PWM/Resistor dimming (Class I)
BE, 0-10V/PWM/Resistor dimming (Class II)
Please refer to spec for more details.

VH-P Series-----25-60W, 100-277Vac, 0-10V/PWM/Resistor dimming, IP65, Class I/Class II



Features

- ▶ Input voltage:100-277Vac
- ▶ Efficiency up to 90%
- ▶ Programmable(AOC, CLO, SSA, ELA)
- ▶ 6kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming
- ▶ Positive or negative logic dimming
- ▶ Dim to off
- ▶ Class I/Class II
- ▶ Protections: SCP/OTP/OVP
- ▶ IP65
- ▶ 5 years warranty

Power Levels

25W 40W 60W


Applications

Street light, Tunnel light, Flood light, High mast light, Highbay

Certificates



Dimension

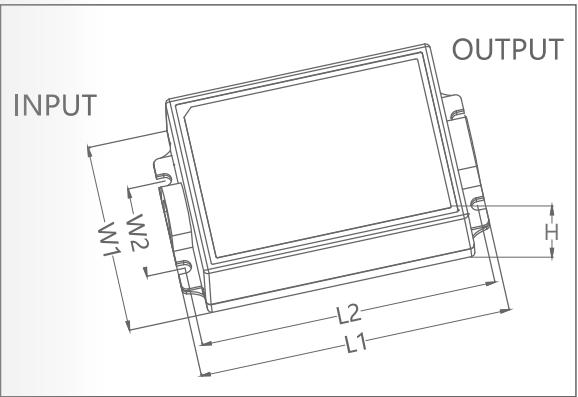

Units : mm

Model	L1	L2	L3	W1	W2	H
25/40/60VH-P	105	100	92	66	32	35

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
25	SS-25VH-P62*	30-62	0.1-0.66	88.0%	0.97	105*66*35
40	SS-40VH-P62*	30-62	0.1-1.05	88.0%	0.97	105*66*35
60	SS-60VH-P54*	27-54	0.35-1.67	89.0%	0.97	105*66*35
60	SS-60VH-P86*	43-86	0.35-1.1	90.0%	0.97	105*66*35

Note: *=B, 0-10V/PWM/Resistor dimming(Class I)
BE, 0-10V/PWM/Resistor dimming (Class II)
Please refer to spec for more details.

VH Series-----75-240W, 100-277Vac, 0-10V/PWM/Resistor dimming, IP67



Features

- ▶ Input voltage:100-277Vac
- ▶ Efficiency up to 95%
- ▶ Programmable(AOC, CLO, SSA, ELA)
- ▶ 10kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming
- ▶ Positive or negative logic dimming
- ▶ Dim to off
- ▶ Type HL, suitable for hazardous locations
- ▶ Protections: SCP/OTP/OVP/OPP
- ▶ IP67
- ▶ 8 years warranty

Power Levels

75W 100W 150W 200W 240W


Applications

Street light, Wallpack, Flood light, Tunnel light

Certificates



Dimension

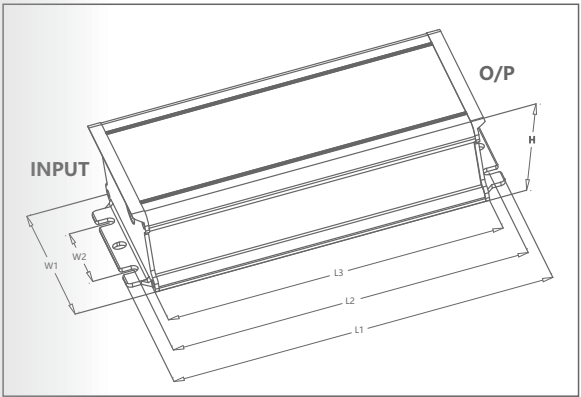

Units : mm

Model	L1	L2	L3	W1	W2	H
75/100VH	145	136	128	66	32	35
150VH	165	156	148	66	32	37
200VH	180	171	163	66	32	37
240VH	195	186	178	66	32	39

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
75	SS-75VH-56B	28-56	0.35-2.1	90.5%	0.97	145*66*35
96	SS-100VH-56B	28-56	0.35-2.66	90.5%	0.97	145*66*35
150	SS-150VH-56B	28-56	0.7-4.2	93.0%	0.98	165*66*37
200	SS-200VH-56B	28-56	0.7-5.6	94.0%	0.98	180*66*37
240	SS-240VH-56B	28-56	0.7-6.7	95.0%	0.98	195*66*39

Note: B, 0-10V/PWM/Resistor dimming
Please refer to spec for more details.

VA Series-----25-240W, 100-277Vac, 1-10V/PWM/Resistor dimming, IP67



Features

- ▶ Input voltage:100-277Vac
- ▶ Efficiency up to 93%
- ▶ Flicker Free
- ▶ 10kV/6kV surge protection
- ▶ 1-10V/PWM/Resistor isolated dimming
- ▶ Type HL, suitable for hazardous locations
- ▶ Protections: SCP/OTP/OVP/OPP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

25W 30W 35W 40W 50W 60W 75W 100W 120W 150W 200W 240W


Applications

Street light, Tunnel light, Wallpack, Flood light

Certificates



Dimension

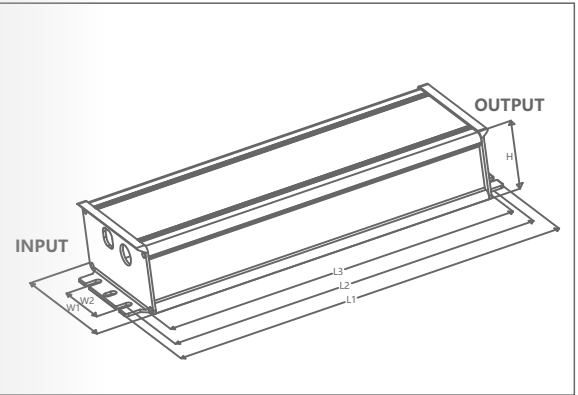

Model	Units : mm					
	L1	L2	L3	W1	W2	H
25/35VA-L	120	113.1	107	50	18.2	31
40VA-T/50VA-L	132	125.1	119	50	18.2	31
30/50VA/60VA-T/60VA-L	105	100	92	66	32	31.5
75VA	172	157	147	66	32	35.5
100/120VA	179	164	154	66	32	35.5
150VA	201	186	176	71	34	39.6
200VA	222	207	197	71	34	39.6
240VA	244	229	219	71	34	39.6

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
25	SS-25VA-L50*	28- 50	0.4- 0.66	88.0%	0.97	120*50*31
35	SS-35VA-L50*	28- 50	0.55- 0.92	89.0%	0.97	120*50*31
50	SS-50VA-L50*	28- 50	0.8-1.32	89.0%	0.97	132*50*31
60	SS-60VA-L50*	28- 50	0.96-1.66	89.0%	0.97	105*66*31.5
30	SS-30VA-56*	22- 56	0.45- 0.95	86.0%	0.97	105*66*31.5
40	SS-40VA-T50*	28-50	0.64-1.1	89.0%	0.97	132*50*31
50	SS-50VA-56*	22- 56	0.7- 1.55	88.0%	0.97	105*66*31.5
60	SS-60VA-T50*	28-50	0.96-1.66	89.0%	0.97	105*66*31.5
75	SS-75VA-56*	22- 56	1.2- 2.4	88.0%	0.97	172*66*35.5
96	SS-100VA-40*	22- 40	2.3- 3.0	90.0%	0.98	179*66*35.5
96	SS-100VA-56*	22- 56	1.6- 2.3	91.0%	0.98	179*66*35.5
112	SS-120VA-56*	22- 56	1.6- 3.5	91.0%	0.98	179*66*35.5
150	SS-150VA-56*	22- 56	2.1- 4.2	93.0%	0.98	201*71*39.6
200	SS-200VA-56*	22- 56	2.8- 5.6	93.0%	0.98	222*71*39.6
240	SS-240VA-56*	22- 56	3.3- 6.7	93.0%	0.98	244*71*39.6

Note: *=Blank, ON-OFF Version
B, 1-10V/PWM/Resistor dimming
T, Timing (Programmable), VA-L, 0-10V/PWM/Resistor dimming
Please refer to spec for more details.

GA-E Series-----30-250W, 100-277Vac, 0-10V/PWM/Resistor/DALI-2 dimming, IP67, Class I/Class II



Features

- ▶ Input voltage: 100-277Vac
- ▶ Full power working voltage: 180-277Vac
- ▶ Efficiency up to 94.5%
- ▶ Flicker Free
- ▶ Programmable(AOC, CLO, SSA, ELA), NFC program(DALI-2)
- ▶ 10kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming/DALI-2
- ▶ Positive or negative logic dimming
- ▶ Dim to off
- ▶ Class I/Class II
- ▶ Protections: SCP/OTP/OVP/OPP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

30W 50W 75W 100W 150W 200W 250W


Applications

Street light, Tunnel light, Flood light, High mast light, Highbay, Horticulture light, Sports light

Certificates



Dimension

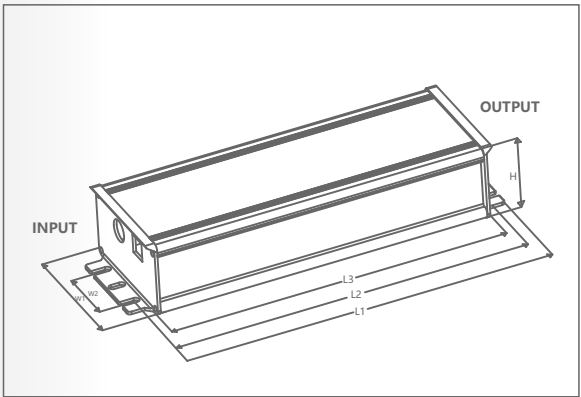

Units : mm						
Model	L1	L2	L3	W1	W2	H
30/50GA-E	105	100	92	66	32	31.5
75/100GA-E	138	124	116	66	32	35
150GA-E	165	156	148	66	32	35
200GA-E	165	156	148	66	32	37
250GA-E	180	171	163	66	32	37

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
30	SS-30GA-E62*	30-62	0.1-0.8	87.0%	0.97	105*66*31.5
30	SS-30GA-E100*	50-100	0.1-0.5	87.0%	0.97	105*66*31.5
50	SS-50GA-E62*	30-62	0.1-1.3	88.0%	0.97	105*66*31.5
50	SS-50GA-E100*	50-100	0.1-0.8	88.5%	0.97	105*66*31.5
75	SS-75GA-E62*	30-62	0.35-2.1	88.0%	0.97	138*66*35
75	SS-75GA-E108*	54-108	0.1-1.05	89.0%	0.97	138*66*35
75	SS-75GA-E143B/BE	72-143	0.1-0.7	89.0%	0.97	138*66*35
100	SS-100GA-E62*	30-62	0.35-2.85	89.0%	0.97	138*66*35
100	SS-100GA-E95B/BE	48-95	0.35-1.5	90.0%	0.97	138*66*35
100	SS-100GA-E143*	71-143	0.1-1.05	90.0%	0.97	138*66*35
150	SS-150GA-E62*	30-62	0.35-3.75	91.5%	0.97	165*66*35
150	SS-150GA-E143B/BE	72-143	0.35-1.5	92.5%	0.97	165*66*35
150	SS-150GA-E215*	107-215	0.1-1.05	93.0%	0.97	165*66*35
200	SS-200GA-E62*	30-62	0.7-5.0	92.0%	0.97	165*66*37
200	SS-200GA-E286*	143-286	0.1-1.05	94.0%	0.97	165*66*37
200	SS-200GA-E378B/BE	189-378	0.1-0.7	94.0%	0.97	165*66*37
250	SS-250GA-E62*	30-62	0.7-6.25	92.5%	0.97	180*66*37
250	SS-250GA-E358*	179-358	0.1-1.05	94.0%	0.97	180*66*37
250	SS-250GA-E453B/BE	236-453	0.1-0.7	94.5%	0.97	180*66*37

Note: *=B, 0-10V/PWM/Resistor dimming (Class I)
BE, 0-10V/PWM/Resistor dimming (Class II)
D, DALI dimming(Class I)
DE, DALI dimming (Class II)
Please refer to spec for more details.

PA Series-----22-220W, 220-240Vac, 0-10V/PWM/Resistor/D4i dimming, IP20, Class I/Class II



Features

- ▶ Input voltage: 220-240Vac
- ▶ Efficiency up to 95%
- ▶ Flicker free
- ▶ NFC program(AOC, CLO, SSA, ELA)
- ▶ 10kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor/AC/Timing dimming
- ▶ AUX: 24Vdc
- ▶ Built-in AC power metering with up to ±1% accuracy
- ▶ Standby power<0.5W
- ▶ Class I/Class II
- ▶ IP20(Suitable for light >IP54)
- ▶ Installation dimensions conform to Zhaga Interface Specification Book 13
- ▶ 5 years warranty(0-10V/PWM/Resistor Version)
- ▶ 8 years warranty(D4i Version)

Power Levels

22W 40W 75W 80W 110W 165W 220W


Applications

Street light, Tunnel light, Flood light, High mast light, Highbay, Horticulture light, Sports light

Certificates



Dimension

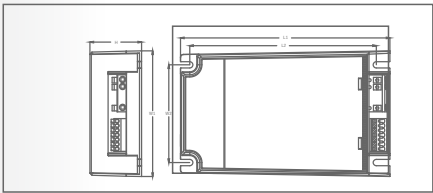

Model	Units : mm				
	L1	L2	W1	W2	H
22PA-B/40PA-B/40PA-HB/80PA-HB	123	111	79	/	31
22PA-F/40PA-F/75PA-B/110PA-B	133	122	77	/	37
75PA-F/110PA-F	150	133	90	70	37
165PA-B/165PA-F/220PA-F	171	160	101	90	35

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
22	SS-22PA-32B	12-32	0.35-1.05	85.0%	0.98	123*79*31
22	SS-22PA-32F	8-32	0.2-1.05	86.0%	0.98	133*77*37
22	SS-22PA-49F	18-49	0.2-0.7	87.0%	0.98	133*77*37
22	SS-22PA-72F	24-72	0.2-0.45	87.0%	0.98	133*77*37
40	SS-40PA-54B	20-54	0.35-1.05	88.0%	0.98	123*79*31
40	SS-40PA-H57B	19-57	0.2-1.05	89.0%	0.98	123*79*31
40	SS-40PA-57F	19-57	0.3-1.05	90.5%	0.98	133*77*37
40	SS-40PA-80F	25-80	0.2-0.7	90.5%	0.98	133*77*37
40	SS-40PA-133F	44-133	0.2-0.45	90.5%	0.98	133*77*37
75	SS-75PA-108B	38-108	0.35-1.05	91.0%	0.98	133*77*37
75	SS-75PA-114F	36-114	0.2-1.05	92.0%	0.98	150*90*37
75	SS-75PA-178F	56-178	0.2-0.7	93.0%	0.98	150*90*37
75	SS-75PA-245F	74-245	0.2-0.5	92.5%	0.98	150*90*37
80	SS-80PA-H114B	38-114	0.2-1.05	91.0%	0.98	123*76*31
110	SS-110PA-160B	55-160	0.35-1.05	92.0%	0.98	133*77*37
110	SS-110PA-105F	35-105	0.2-1.5	92.5%	0.98	150*90*37
110	SS-110PA-160F	52-160	0.2-1.05	93.0%	0.98	150*90*37
110	SS-110PA-245F	81-245	0.2-0.7	93.0%	0.98	150*90*37
165	SS-165PA-235B	90-235	0.35-1.05	92.0%	0.98	171*101*35
165	SS-165PA-157F	54-157	0.2-1.5	93.5%	0.98	171*101*35
165	SS-165PA-236F	79-236	0.2-1.05	94.0%	0.98	171*101*35
165	SS-165PA-367F	118-367	0.2-0.7	94.0%	0.98	171*101*35
220	SS-220PA-210F	70-210	0.2-1.5	94.3%	0.98	171*101*35
220	SS-220PA-314F	104-314	0.2-1.05	94.5%	0.98	171*101*35
220	SS-220PA-415F	133-415	0.2-0.7	95.0%	0.98	171*101*35

Note: B, 0-10V/PWM/Resistor dimming
F, D4i+NFC Programmable
HB, 0-10V/PWM/Resistor dimming+NFC
Please refer to spec for more details.

EP-M Series--55-190W, 120-347Vac, 0-10V/PWM/Resistor dimming, Class 2, AUX:12V



Features

- ▶ Input voltage: 120-347Vac
- ▶ Efficiency up to 92.5%
- ▶ Flicker free
- ▶ Programmable(AOC, CLO, SSA, ELA)
- ▶ 6kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming
- ▶ Positive or negative logic dimming
- ▶ Dim to off
- ▶ AUX: 12Vdc
- ▶ Standby power<0.5W
- ▶ Class 2 & Class P
- ▶ 5 years warranty


Power Levels

55W 75W 100W 150W 190W


Applications

Street light, Tunnel light, Flood light, High mast light, Highbay, Horticulture light, Sports light

Certificates



Dimension

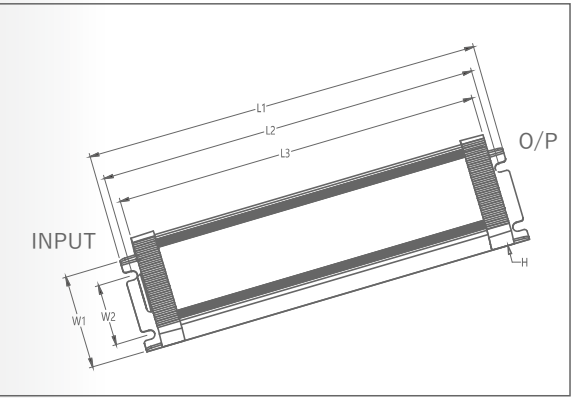

Units : mm

Model	L1	L2	L3	W1	W2	H
55EP-M	164	156	150	45.5	28	31
75EP-M	220	212	206	45.5	28	31
100EP-M	220	212	206	45.5	28	31
150EP-M	285	277	271	45.5	28	31
190EP-M	360	352	346	45.5	28	31

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
55	SS-55EP-M54BH	18-54	0.2-1.8	88.0%	0.95	164*45.5*31
75	SS-75EP-M54BH	18-54	0.2-2.1	88.0%	0.95	220*45.5*31
100	SS-100EP-M54BH	18-54	0.35-2.75	90.0%	0.95	220*45.5*31
75X2	SS-150EP-M54BH2	18-54	0.35-2.1	92.5%	0.95	285*45.5*31
75X2	SS-150EP-M54BHB2	18-54	0.35-2.1	92.5%	0.95	285*45.5*31
95X2	SS-190EP-M54BH2	18-54	0.35-2.64	92.5%	0.95	360*45.5*31
95X2	SS-190EP-M54BHB2	18-54	0.35-2.64	92.5%	0.95	360*45.5*31

Note: BH, 0-10V/PWM/Resistor dimming+AUX
BH2, 0-10V/PWM/Resistor dimming+AUX(two channels)
BHB2, 0-10V/PWM/Resistor dimming+AUX (two channels)+DIP Switch Power
Please refer to spec for more details.

VP Series-----50-1500W, 100-277Vac, 0-10V/PWM/Resistor/DALI-2 dimming, AUX:12V, IP67



Features

- ▶ Input voltage: 100-277Vac
- ▶ Efficiency up to 95.5%
- ▶ Constant power, flicker free
- ▶ Programmable(AOC, CLO, ELA, SSA)
- ▶ 10kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming/DALI-2, dim to off
- ▶ AUX: 12Vdc
- ▶ Type HL, suitable for hazardous locations
- ▶ Protections: SCP/OTP/OVP
- ▶ IP67
- ▶ 5 years warranty(8 years optional)

Power Levels

50W 75W 100W 150W 200W 240W 320W 400W 500W 600W 650W 720W
730W 1000W 1500W


Applications

Street light, High mast light, Fish light, Horticulture light, Sports light

Certificates



Dimension

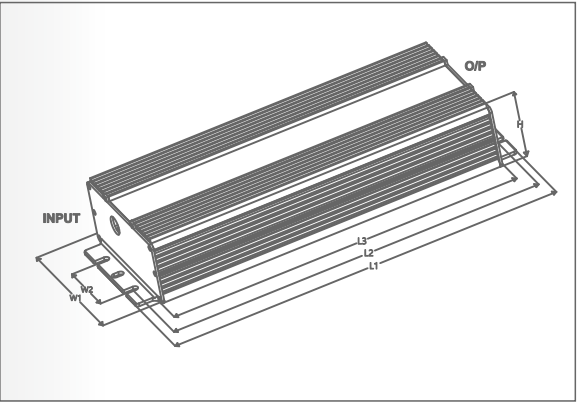

Units : mm

Model	L1	L2	L3	W1	W2	H
50VP	138	129	121	66	32	35.5
75VP	179	164	154	66	32	35.5
100VP	193	178	169	66	32	35.5
150VP	209	196	182	71	34	39.6
200VP	244	229	219	71	34	39.6
240VP	254	241	230	71	34	39.6
320/400VP	252	238.3	225	89.5	40	44.5
500VP	260.8	247.3	234	125	78	43.5
600/720VP	282	267	261.2	144	97	49.5
650/730VP	430	416.5	403.2	89.5	40	44.5
1000VP	440	426.5	413.2	89.5	40	44.5
1500VP	489	475	464	90	40	49

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
50	SS-50VP-56*	22-56	0.35-1.56	86.0%	0.95	138*66*35.5
50	SS-50VP-72*	28-72	0.35-1.4	87.0%	0.95	138*66*35.5
75	SS-75VP-56*	22-56	0.35-2.4	88.0%	0.95	179*66*35.5
75	SS-75VP-108*	54-108	0.1-1.05	90.0%	0.95	179*66*35.5
100	SS-100VP-56*	22-56	0.35-3.0	90.0%	0.95	193*66*35.5
100	SS-100VP-143*	72-143	0.1-1.05	92.0%	0.95	193*66*35.5
150	SS-150VP-56*	22-56	0.35-4.2	92.0%	0.95	209*71*39.6
150	SS-150VP-143*	72-143	0.35-1.5	92.0%	0.95	209*71*39.6
150	SS-150VP-215*	108-215	0.1-1.05	93.0%	0.95	209*71*39.6
200	SS-200VP-56*	22-56	0.7-5.6	92.0%	0.95	244*71*39.6
200	SS-200VP-190*	95-190	0.35-1.5	92.5%	0.95	244*71*39.6
200	SS-200VP-286*	143-286	0.1-1.05	92.5%	0.95	244*71*39.6
240	SS-240VP-56*	22-56	0.7-6.67	92.5%	0.95	254*71*39.6
240	SS-240VP-228*	114-228	0.35-1.5	93.0%	0.95	254*71*39.6
240	SS-240VP-343*	171-343	0.1-1.05	93.5%	0.95	254*71*39.6
320	SS-320VP-56*	22-56	1.05-8.4	94.0%	0.95	252*89.5*44.5
320	SS-320VP-228*	114-228	0.35-1.75	93.5%	0.95	252*89.5*44.5
320	SS-320VP-428*	214-428	0.1-1.05	94.0%	0.95	252*89.5*44.5
400	SS-400VP-56*	28-56	1.05-8.35	94.0%	0.95	252*89.5*44.5
400	SS-400VP-228*	114-228	0.35-2.5	95.0%	0.95	252*89.5*44.5
500	SS-500VP-56*	22-56	1.4-11.4	94.5%	0.95	260.8*125*43.5
500	SS-500VP-228*	114-228	0.35-2.8	94.5%	0.95	260.8*125*43.5
500	SS-500VP-428*	214-428	0.35-1.4	95.0%	0.95	260.8*125*43.5
600	SS-600VP-42*	20-42	1.7-16.7	93.0%	0.95	282*144*49.5
600	SS-600VP-56*	22-56	1.25-12.5	95.0%	0.95	282*144*49.5
600	SS-600VP-190*	95-190	0.7-4.2	95.0%	0.95	282*144*49.5
600	SS-600VP-286*	143-286	0.35-2.8	95.0%	0.95	282*144*49.5
600	SS-600VP-428*	214-428	0.35-1.75	95.0%	0.95	282*144*49.5
650	SS-650VP-56BH/BHB	28-56	1.4-13.5	95.0%	0.95	430*89.5*44.5
720	SS-720VP-56*	28-56	1.5-15.0	95.0%	0.95	282*144*49.5
730	SS-730VP-56BH/BHB	28-56	1.75-15.2	95.0%	0.95	430*89.5*44.5
1000	SS-1000VP-54BH	28-56	2.1-20.8	95.0%	0.95	440*89.5*44.5
1000	SS-1000VP-56BH/BHB	28-56	2.1-20.8	95.0%	0.95	440*89.5*44.5
1500	SS-1500VP-56BH/BHB	36-56	3.15-31.25	95.5%	0.95	489*90*49

Note: *=BH, 0-10V/PWM/Timing dimming+AUX
BHN, 0-10V/PWM/Resistor dimming+AUX+NTC
DH, DALI dimming+AUX
DHN, DALI dimming+AUX+NTC
BHB, integrated horticulture light LED Driver with knob, Network dimming can be realized through RJ25 network interface (BHB Version Only for 320/400/650/730/1000/1500VP-56)
Please refer to spec for more details.

VP-H Series-----200-880W, 100-277Vac, 0-10V/PWM/Resistor/DALI-2 dimming, AUX:12V, IP67



Features

- ▶ Input voltage: 100-277Vac
- ▶ Efficiency up to 95%
- ▶ Constant power, flicker free
- ▶ Programmable(AOC, CLO, ELA, SSA,NTC)
- ▶ 10kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming/DALI-2, dim to off
- ▶ AUX: 12Vdc
- ▶ Type HL, suitable for hazardous locations
- ▶ Protections: SCP/OTP/OVP
- ▶ IP67
- ▶ 5 years warranty(8 years optional)

Power Levels

200W 240W 320W 500W 680W 880W


Applications

Sports light, Fish light, Horticulture light

Certificates



Dimension

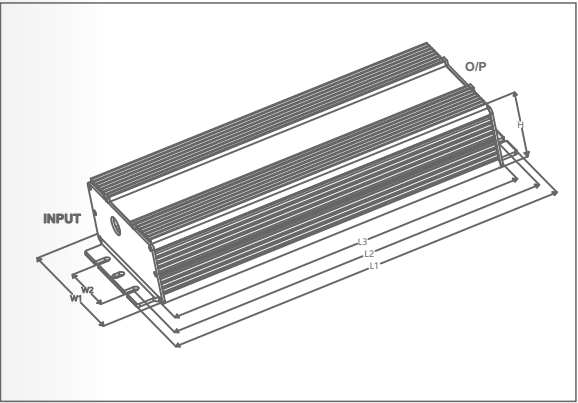

Units : mm

Model	L1	L2	L3	W1	W2	H
200VP-H	209	196	182	71	34	39.6
240VP-H	244	229	219	71	34	39.6
320VP-H	254	241	230	71	34	42.7
500VP-H	262	251	240	105	60	44.5
680VP-H	272	261	250	125	78	44.5
880VP-H	276	265	254	144	97	49.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
200	SS-200VP-H56*	36-56	0.7-4.35	92.5%	0.95	209*71*39.6
240	SS-240VP-H56*	36-56	0.7-5.22	93.0%	0.95	244*71*39.6
320	SS-320VP-H56*	36-56	0.7-6.7	93.5%	0.95	254*71*42.7
500	SS-500VP-H56*	28-56	1.4-11.4	95.0%	0.97	262*105*44.5
680	SS-680VP-H56*	28-56	1.4-14.16	95.0%	0.97	272*125*44.5
680	SS-680VP-H200*	100-200	0.7-4.53	95.0%	0.95	272*125*44.5
880	SS-880VP-H56*	28-56	2.1-20.0	95.0%	0.97	276*144*49.5
880	SS-880VP-H200*	100-200	0.7-5.86	95.0%	0.97	276*144*49.5

Note : *=BH, 0-10V/PWM/Resistor dimming+AUX
DH, DALI dimming+AUX(DALI dimming only for 320/500/680/880W)
BHN, 0-10V/PWM/Resistor dimming+AUX+NTC
DHN, DALI dimming+AUX+NTC
Please refer to spec for more details.

M Series-----100-1000W, 200/220/277-480Vac, 0-10V/PWM/Resistor dimming, AUX:12V, IP67



Features

- ▶ Input voltage: 277-480Vac/220-480Vac (600/800M) /200-480Vac (680/880M)
- ▶ Efficiency up to 96.5%
- ▶ Constant power, flicker free
- ▶ Programmable(AOC, CLO, SSA, ELA)
- ▶ 10kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming, dim to off
- ▶ AUX: 12Vdc
- ▶ Class 2(100M)/Class P
- ▶ Type HL, suitable for hazardous locations
- ▶ Protections: SCP/OTP/IUVP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

100W 150W 240W 320W 600W 680W 800W 880W 1000W


Applications

Street light, Flood light, Horticulture light, Sports light, High mast light

Certificates



Dimension

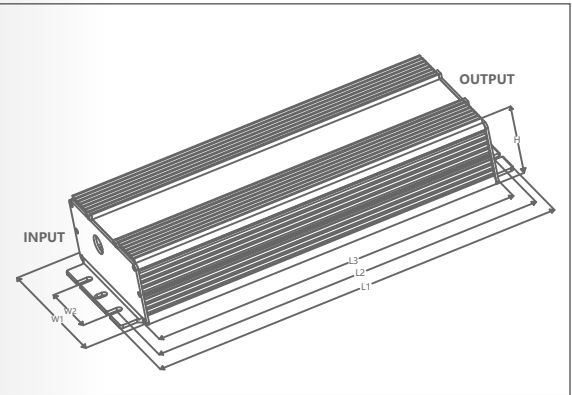

Units : mm						
Model	L1	L2	L3	W1	W2	H
100/150M	221	206	197	71	34	39.6
240M	254	241	230	71	34	39.6
320M	261.8	248.3	235	89.5	40	44.5
600M	288	266.7	255.2	144	97	49.5
680M	430	416.5	403.2	89.5	40	44.5
800M	288	266.7	261.2	144	97	49.5
880M/1000M	440	426.5	413.2	89.5	40	44.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
96	SS-100M-56BH	22-56	0.35-2.97	89.0%	0.95	221*71*39.6
100	SS-100M-185BH	75-185	0.1-1.05	90.0%	0.95	221*71*39.6
150	SS-150M-56BH	22-56	0.35-4.2	90.0%	0.95	221*71*39.6
150	SS-150M-215BH	85-215	0.1-1.4	91.0%	0.95	221*71*39.6
240	SS-240M-56BH	22-56	0.7-6.7	92.0%	0.95	254*71*39.6
240	SS-240M-228BH	114-228	0.35-1.75	93.0%	0.95	254*71*39.6
240	SS-240M-343BH	171-343	0.1-1.05	93.0%	0.95	254*71*39.6
320	SS-320M-56BH	32-56	0.7-8.4	92.0%	0.95	261.8*89.5*44.5
320	SS-320M-228BH	114-228	0.35-1.75	93.0%	0.95	261.8*89.5*44.5
320	SS-320M-428BH	214-428	0.1-1.05	93.0%	0.95	261.8*89.5*44.5
600	SS-600M-56BH	22-56	1.25-12.5	95.5%	0.98	288*144*49.5
600	SS-600M-190BH	95-190	0.7-4.2	95.5%	0.98	288*144*49.5
600	SS-600M-286BH	143-286	0.35-2.8	95.5%	0.98	288*144*49.5
600	SS-600M-428BH	214-428	0.35-1.75	95.5%	0.98	288*144*49.5
680	SS-680M-56BH	36-56	1.4-14.2	95.0%	0.98	430*89.5*44.5
800	SS-800M-56BH	28-56	1.67-16.7	96.0%	0.95	288*144*49.5
800	SS-800M-190BH	95-190	0.7-5.26	95.5%	0.95	288*144*49.5
800	SS-800M-286BH	143-286	0.35-3.72	96.0%	0.95	288*144*49.5
800	SS-800M-380BH	190-380	0.35-2.6	96.0%	0.95	288*144*49.5
880	SS-880M-56BH	28-56	1.8-18.3	96.5%	0.98	440*89.5*44.5
880	SS-880M-205BH	110-205	0.8-5.0	96.5%	0.98	440*89.5*44.5
1000	SS-1000M-56BH	28-56	2.1-20.8	96.0%	0.98	440*89.5*44.5

Note: BH, 0-10V/PWM/Timing dimming+AUX
Please refer to spec for more details.

MS Series-----50-1200W, 200-480Vac, 0-10V/PWM/Resistor/DALI-2 dimming, AUX:12V, IP66/IP67



Features

- ▶ Input voltage: 200-480Vac
- ▶ Efficiency up to 96%
- ▶ Constant power, flicker free
- ▶ Programmable(AOC, NTC, CLO, SSA, ELA)
- ▶ 10kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor dimming/DALI-2, dim to off
- ▶ AUX: 12Vdc
- ▶ Type HL, suitable for hazardous locations
- ▶ Protections: SCP/OTP/IUVP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

50W 75W 95W 150W 200W 240W 320W 500W 680W 880W 1200W


Applications

Street light, Tunnel light, Flood light, High bay light, Horticulture light, Sports light, Fish light

Certificates



Dimension

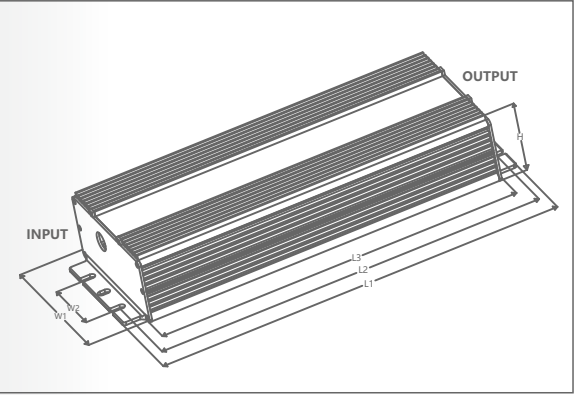

Units : mm

Model	L1	L2	L3	W1	W2	H
50/75MS	142	134	125	76.5	27	36.7
95MS	148	140	131	76.5	27	36.7
150MS	178	170	161	76.5	27	38.5
200MS	190	182	173	76.5	27	38.5
240MS	218	210	201	76.5	27	38.5
320MS	243	235	224	85	50	44.5
500MS	262	251	240	105	60	44.5
680MS	272	261	250	125	78	44.5
880MS	276	265	254	144	97	49.5
1200MS	310	292	282	144	97	49.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
50	SS-50MS-54*	17-54	0.35-1.5	87.0%	0.96	142*76.5*36.7
75	SS-75MS-54*	17-54	0.35-2.2	88.5%	0.96	142*76.5*36.7
95	SS-95MS-54*	17-54	0.35-2.8	90.0%	0.96	148*76.5*36.7
150	SS-150MS-56*	18-56	0.35-4.2	91.5%	0.96	178*76.5*38.5
200	SS-200MS-56*	18-56	0.7-5.6	92.0%	0.96	190*76.5*38.5
240	SS-240MS-56*	18-56	0.7-6.7	92.0%	0.96	218*76.5*38.5
320	SS-320MS-56*	18-56	0.7-8.0	94.0%	0.96	243*85*44.5
500	SS-500MS-200*	100-200	0.35-3.33	95.5%	0.95	262*105*44.5
500	SS-500MS-290*	145-290	0.35-2.38	95.5%	0.95	262*105*44.5
500	SS-500MS-400*	200-400	0.35-1.67	96.0%	0.95	262*105*44.5
680	SS-680MS-145*	73-145	0.7-6.3	94.5%	0.95	272*125*44.5
680	SS-680MS-200*	100-200	0.7-4.53	95.5%	0.95	272*125*44.5
680	SS-680MS-290*	145-290	0.35-3.23	96.0%	0.95	272*125*44.5
680	SS-680MS-400*	200-400	0.35-2.27	96.5%	0.95	272*125*44.5
880	SS-880MS-200*	100-200	0.7-5.86	96.0%	0.95	276*144*49.5
880	SS-880MS-290*	145-290	0.7-4.19	96.0%	0.95	276*144*49.5
880	SS-880MS-400*	200-400	0.7-2.93	96.5%	0.95	276*144*49.5
1200	SS-1200MS-200*	100-200	1.05-8.0	96.0%	0.95	310*144*49.5
1200	SS-1200MS-290*	145-290	0.7-5.71	96.0%	0.95	310*144*49.5
1200	SS-1200MS-400*	200-400	0.7-4.0	96.0%	0.95	310*144*49.5

Note : *=BH, 0-10V/PWM/Resistor dimming+AUX
DH, DALI dimming+AUX(500-1200W)
BHN, 0-10V/PWM/Resistor dimming+AUX+NTC
DHN, DALI dimming+AUX+NTC(500-1200W)
Please refer to spec for more details.

AX Series-----Constant voltage, 50-350W, 120-277Vac, IP67



Features

- ▶ Input voltage:120-277Vac
- ▶ Efficiency up to 94%
- ▶ Flicker free
- ▶ 6kV/4kV surge protection(10kV/6kV optional)
- ▶ Protections: SCP/STP/SVP
- ▶ IP66/IP67
- ▶ 5 years warranty

Power levels

50W 75W 90W 100W 150W 200W 250W 350W


Applications

Light strip light, Landscape light, Advertising light

Certificates



Dimension

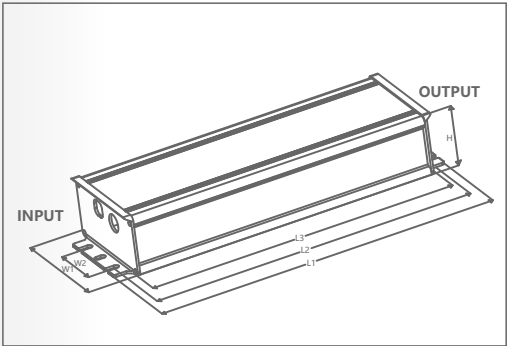

Units : mm

Model	L1	L2	L3	W1	W2	H
50/75/90/100AX	105	100	92	66	32	31.5
150AX	138	129.1	121	66	32	37
200/250AX	165	156.1	148	66	32	37
350AX	243	238	230	76.5	53.8	38.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Voltage(A)	Efficiency	PF	Dimension(L*W*H)mm
50	SS-50AX-12	12	0-4.16	85.8%	0.98	105*66*31.5
50	SS-50AX-24	24	0-2.08	86.8%	0.98	105*66*31.5
75	SS-75AX-12	12	0-6.25	90.0%	0.98	105*66*31.5
75	SS-75AX-24	24	0-3.15	90.5%	0.98	105*66*31.5
90	SS-90AX-24	24	0-3.75	93.5%	0.98	105*66*31.5
100	SS-100AX-12	12	0-8.4	92.5%	0.98	105*66*31.5
100	SS-100AX-24	24	0-4.2	93.0%	0.98	105*66*31.5
150	SS-150AX-12	12	0-12.5	91.5%	0.98	138*66*35
150	SS-150AX-24	24	0-6.25	93.0%	0.98	138*66*35
200	SS-200AX-12	12	0-16.7	92.0%	0.98	165*66*37
200	SS-200AX-24	24	0-8.4	93.0%	0.98	165*66*37
250	SS-250AX-12	12	0-20.83	93.0%	0.98	165*66*37
250	SS-250AX-24	24	0-10.42	93.0%	0.98	165*66*37
350	SS-350AX-24	24	0-14.6	94.0%	0.98	243*76.5*38.5
350	SS-350AX-48	48	0-7.3	94.0%	0.98	243*76.5*38.5

Please refer to spec for more details.

VP-E Series-----600-1000W, 120-277Vac, 0-10V/PWM/Resistor dimming, IP67



Features

- ▶ Input voltage: 120-277Vac
- ▶ Efficiency up to 96%
- ▶ Special design for horticulture lighting
- ▶ Programmable(AOC, CLO, SSA, ELA, NTC)
- ▶ 10kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming, dim to off
- ▶ Standby power<0.5W, dim-to-off@230Vac
- ▶ AUX: 12Vdc
- ▶ RJ25+knob, panel mount connectors optional
- ▶ Type HL, suitable for hazardous locations
- ▶ Protections: SCP/OTP/OVP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

600W 800W 1000W



Applications

Horticulture light, Sports light, Square light, Fish light

Certificates



Dimension

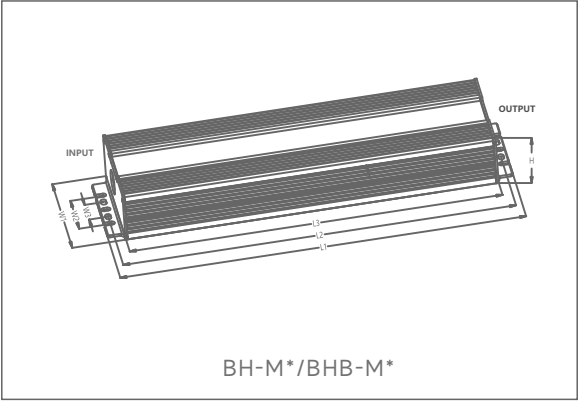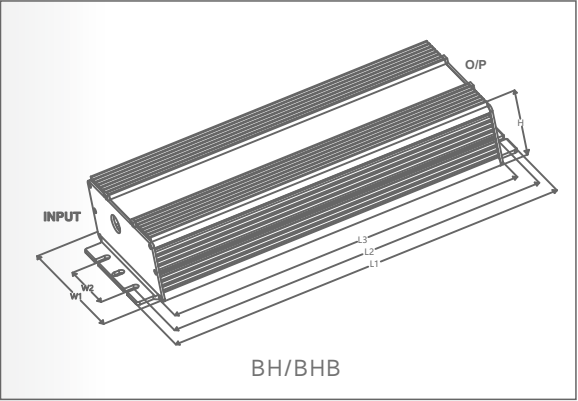

Units : mm							
Model	L1	L2	L3	W1	W2	W3	H
600VP-E56BH	325	312	297	89.5	40	/	44.5
600VP-E56BHB	335	325	308	89.5	40	/	44.5
600VP-E56BH-M*/BHB-M*	335	325	308	89.5	40	21	44.5
800VP-E56BH	380	367	354	89.5	40	/	44.5
800VP-E56BHB	390	377	364	89.5	40	/	44.5
800VP-E56BH-M*/BHB-M*	390	377	364	89.5	40	21	44.5
1000VP-E56BH/BHB	461	447	436	89.5	40	/	49
1000VP-E56BH-M*/BHB-M*	461	447	436	89.5	40	21	49

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
600	SS-600VP-E56*	28-56	1.4-12.5	95.5%	0.95	325*89.5*44.5 (BH/BHN)
						335*89.5*44.5 (BHB/BH-M*/BHB-M*)
800	SS-800VP-E56*	28-56	1.75-16.7	95.5%	0.95	380*89.5*44.5 (BH/BHN)
						390*89.5*44.5 (BHB/BH-M*/BHB-M*)
1000	SS-1000VP-E56*	28-56	2.1-20.8	96.0%	0.95	461*89.5*49

Note:*=BH, 0-10V/PWM/Resistor/Timing dimming+AUX
 BHN, 0-10V/PWM/Resistor/Timing dimming+AUX+NTC
 BHB, integrated horticulture light LED Driver with knob, Network dimming can be realized through RJ25 network interface
 BHB-M*, 0-10V/PWM/Resistor+12V, Input M19/Output M19/Dimming & AUX M12 Panel Mount Connectors
 BH-M*, integrated horticulture light LED Driver with knob, Network dimming can be realized through RJ25 network interface
 +Input M19/Output M19 Panel Mount Connectors
 Please refer to spec for more details.

VP-G Series-----730-1200W, 200-277Vac,
0-10V/PWM/Resistor/DALI-2 dimming, IP67



Features

- ▶ Input voltage: 200-277Vac
- ▶ Efficiency up to 95.5%
- ▶ Special design for horticulture lighting
- ▶ Programmable(AOC, CLO, SSA, ELA, NTC)
- ▶ 10kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming, DALI-2(Only for 1200VP-G), dim to off
- ▶ Standby power<0.5W, dim-to-off@230Vac
- ▶ AUX: 12Vdc
- ▶ RJ25+knob,panel mount connectors optional
- ▶ Type HL, suitable for hazardous locations
- ▶ Protections: SCP/OTP/OVP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

730W 800W 1000W 1200W



Applications

Sports light, Fish light, Horticulture light, Square light

Certificates



Dimension

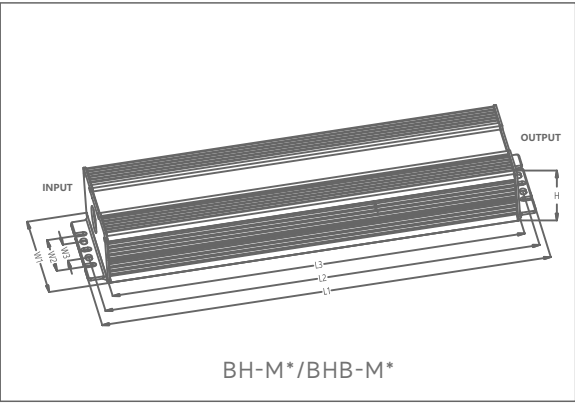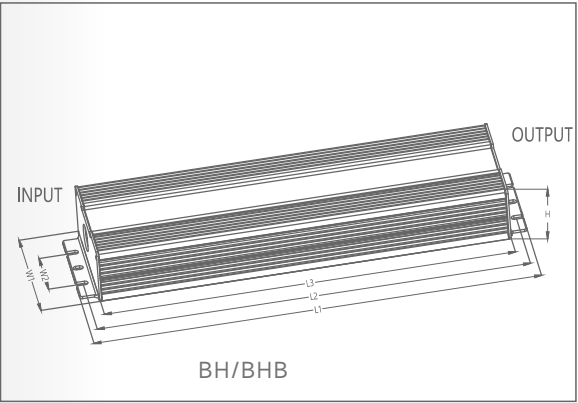

Units : mm

Model	L1	L2	L3	W1	W2	W3	H
730/800VP-G56BH/BHN	325	312	297	89.5	40	/	44.5
730/800VP-G56BHB	335	325	308	89.5	40	/	44.5
730/800VP-G56BH-M*/BHB-M*	335	325	308	89.5	40	21	44.5
1000VP-G56BH/BHN	380	367	354	89.5	40	/	44.5
1000VP-G56BHB	390	377	364	89.5	40	/	44.5
1000VP-G56BH-M*/BHB-M*	390	377	364	89.5	40	21	44.5
1200VP-G	310	299	288	144	97	/	49.5
1200VP-GL56BH/BHB/BHN	461	447	436	89.5	40	/	49
1200VP-GL56BH-M*/BHB-M*	461	447	436	89.5	40	21	49

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
730	SS-730VP-G56*	28-56	1.75-15.2	95.5%	0.95	325*89.5*44.5 (BH/BHN) 335*89.5*44.5 (BHB/BH-M*/BHB-M*)
800	SS-800VP-G56*	28-56	1.75-16.7	95.5%	0.95	325*89.5*44.5 (BH/BHN) 335*89.5*44.5 (BHB/BH-M*/BHB-M*)
1000	SS-1000VP-G56*	28-56	2.1-20.8	95.5%	0.95	380*89.5*44.5 (BH/BHN) 390*89.5*44.5 (BHB/BH-M*/BHB-M*)
1200	SS-1200VP-G200*	100-200	1.05-8.0	95.0%	0.97	310*144*49.5
1200	SS-1200VP-GL56*	28-56	2.8-25.0	95.5%	0.95	461*89.5*49

Note:*=BH, 0-10V/PWM/Resistor dimming+AUX
DH, DALI+AUX(Only for 1200VP-G)
BHN, 0-10V/PWM/Resistor dimming+AUX+NTC
DHN, DALI+AUX+NTC(Only for 1200VP-G)
BHB, integrated horticulture light LED Driver with knob, network dimming can be realized through Rj25 network interface(Except 1200VP-G)
BHB-M*, integrated horticulture light LED Driver with knob,Network dimming can be realized through RJ25 network interface, Input M19/Output M19 Panel Mount Connectors(Except 1200VP-G)
BH-M*, input M19/Output M19/Dimming & AUX M12 Panel Mount Connectors(Except 1200VP-G)
Please refer to spec for more details.

L-N Series-----Non-isolated, 650-1000W, 200-277Vac, 0-10V/PWM/Resistor dimming, IP67



Features

- ▶ Input voltage: 200-277Vac
- ▶ Efficiency up to 96.5%
- ▶ Non-isolated, flicker free
- ▶ Programmable(AOC, CLO, SSA, ELA)
- ▶ 6kV/6kV surge protection
- ▶ Standby power<0.5W
- ▶ 0-10V/PWM/Resistor isolated dimming, dim to off
- ▶ AUX: 12Vdc
- ▶ Protections: SCP/OTP/IUVP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

650W 800W 1000W


Applications

Horticulture light, Sports light, Fish light

Certificates



Dimension

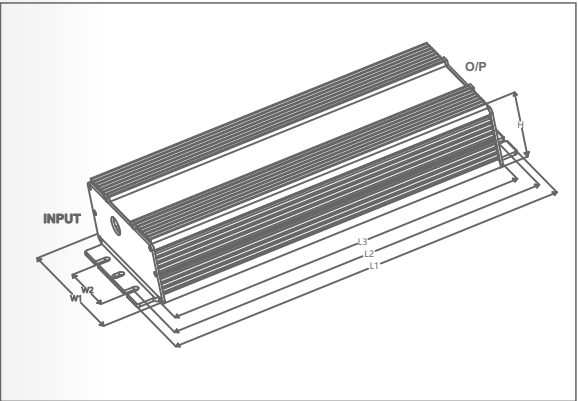

Units : mm

Model	L1	L2	L3	W1	W2	H
650L-N	252	238.3	225	89.5	40	44.5
800L-N	280	266.5	253.2	89.5	40	44.5
1000L-N	368.3	354.8	341.5	89.5	40	44.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
650	SS-650L-N360BH	210-360	0.35-2.7	96.0%	0.98	252*89.5*44.5
800	SS-800L-N360BH	210-360	0.7-3.33	96.5%	0.95	280*89.5*44.5
1000	SS-1000L-N360BH	210-360	0.7-4.17	96.5%	0.95	368.3*89.5*44.5

Note: BH, 0-10V/PWM/Resistor dimming+AUX
Please refer to spec for more details.

RUN Series-----Slim, Non-isolated, 400/600W, 100-277Vac ,
0-10V/PWM/Resistor dimming, IP67



Features

- ▶ Input voltage: 100-277Vac
- ▶ Efficiency up to 97%
- ▶ Slim profile
- ▶ Non-isolated, flicker free
- ▶ Programmable(AOC, CLO, SSA, ELA)
- ▶ 6kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming, dim to off
- ▶ AUX: 12Vdc
- ▶ Protections: SCP/OTP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

400W 600W


Applications

Horticulture light, Highbay, Fish light

Certificates



Dimension

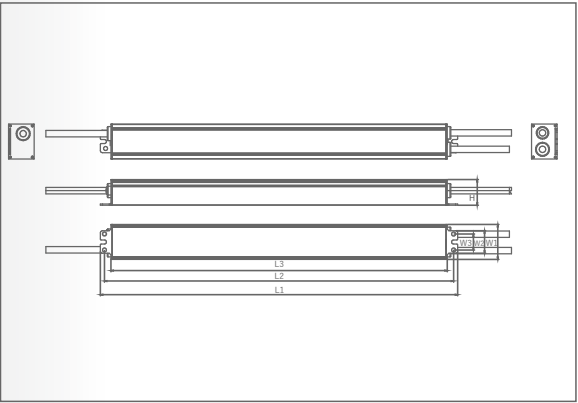

Units : mm						
Model	L1	L2	L3	W1	W2	H
400RUN	390	364	380	43.5	20	32
600RUN	445	419	435	43.5	20	32

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
400	SS-400RUN-400BH	200-400	0.35-1.74	95.5%	0.98	390*43.5*32
600	SS-600RUN-400BH	200-400	0.35-2.6	95.5%	0.98	445*43.5*32

Note: BH, 0-10V/PWM/Resistor dimming+AUX
Please refer to spec for more details.

RUN-M Series-----Slim, Non-isolated, 400/600W, 200-480Vac, 0-10V/PWM/Resistor dimming, IP67



Features

- ▶ Input voltage: 200-480Vac
- ▶ Efficiency up to 97%
- ▶ Slim profile
- ▶ Non-isolated, flicker free
- ▶ Programmable(AOC, CLO, SSA, ELA)
- ▶ 6kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming, dim to off
- ▶ AUX: 12Vdc
- ▶ Protections: SCP/OTP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

400W 600W


Applications

Horticulture light, Highbay, Fish light

Certificates



Dimension

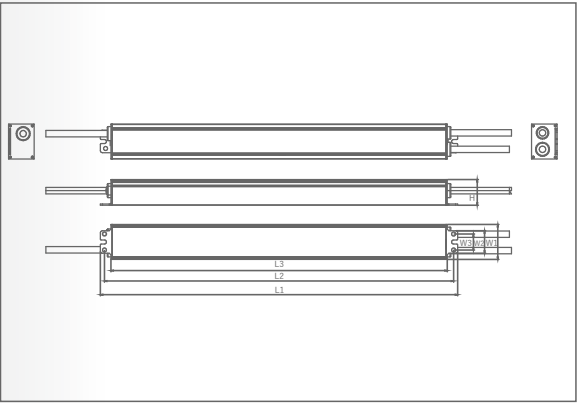

Units : mm

Model	L1	L2	L3	W1	W2	H
400RUN-M	390	380	364	43.5	20	38
600RUN-M	462	452	436	43.5	20	38

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
400	SS-400RUN-M400BH	200-400	0.35-1.74	97.0%	0.97	390*43.5*38
600	SS-600RUN-M400BH	200-400	0.35-2.6	97.0%	0.97	462*43.5*38

Note: BH, 0-10V/PWM/Resistor dimming+AUX
Please refer to spec for more details.

NP Series-----Non-isolated, 500-1200W, 100-277Vac ,
0-10V/PWM/Resistor dimming, IP67



Features

- ▶ Input voltage: 100-277Vac
- ▶ Efficiency up to 97%
- ▶ Non-isolated, flicker free
- ▶ Programmable(AOC, CLO, SSA, ELA)
- ▶ 6kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming, dim to off
- ▶ AUX: 12Vdc
- ▶ Standby power<0.5W
- ▶ Protections: SCP/OTP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

500W 680W 880W 1000W 1200W


Applications

Sports light , Fish light , Horticulture light

Certificates



Dimension

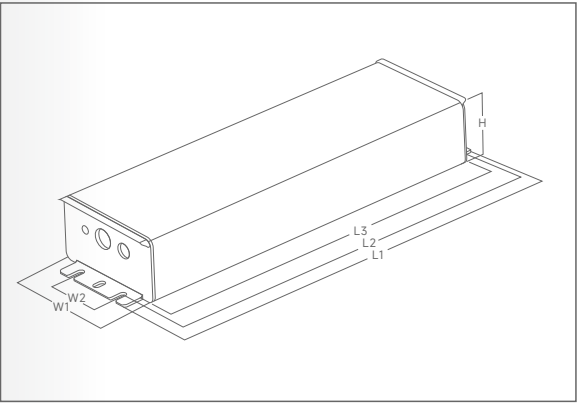

Units : mm						
Model	L1	L2	L3	W1	W2	H
500NP	252	238.3	225	89.5	40	44.5
680NP	297	283	270	89.5	40	44.5
880NP	272	262	250	125	78	44.5
1000NP	350	334	320	89.5	40	49
1200NP	390	374	360	89.5	40	49

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
500	SS-500NP-360*	210-360	0.35-2.08	96.0%	0.98	252*89.5*44.5
680	SS-680NP-360BH	210-360	0.35-2.83	96.0%	0.97	297*89.5*44.5
880	SS-880NP-360BH	210-360	0.7-3.66	96.0%	0.98	272*125*44.5
1000	SS-1000NP-360BH	210-360	0.7-4.16	96.0%	0.97	350*89.5*49
1200	SS-1200NP-360BH	210-360	0.7-5.0	96.0%	0.97	390*89.5*49

Note: *=BH, 0-10V/PWM/Resistor dimming+AUX ,
BHC, Dual-live-line input off(BHC only for 500NP, 680/880/1000/1200NP Dual-live-line input off)
Please refer to spec for more details.

NP-M Series-----Non-isolated, 680-1200W, 200-480Vac ,
0-10V/PWM/Resistor/DALI-2/DMX dimming, IP67



Features

- ▶ Input voltage: 200-480Vac
- ▶ Efficiency up to 97%
- ▶ Non-isolated, flicker free
- ▶ Programmable(AOC, CLO, SSA, ELA)
- ▶ 6kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated/DALI-2/DMX-RDM dimming, dim to off
- ▶ AUX: 12Vdc
- ▶ Standby power<0.5W@230Vac, dim to off
- ▶ Protections: SCP/OTP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

680W 880W 1000W 1200W


Applications

Sports light, Fish light, Horticulture light

Certificates



Dimension

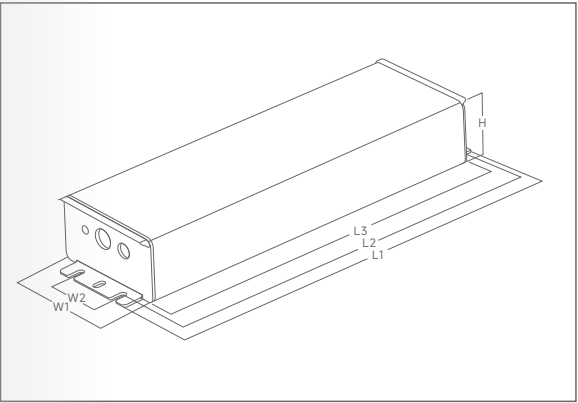

Units : mm

Model	L1	L2	L3	W1	W2	H
680NP-M	230	219	208	125	78	44.5
880NP-M	252	241	230	125	78	44.5
1000NP-M	282	271	260	125	78	44.5
1200NP-M	302	291	280	125	78	44.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
680	SS-680NP-M500*	150-500	0.35-2.7	97.0%	0.95	230*125*44.5
880	SS-880NP-M500*	150-500	0.7-3.49	97.0%	0.95	252*125*44.5
1000	SS-1000NP-M430*	210-430	0.7-4.16	97.0%	0.95	282*125*44.5
1200	SS-1200NP-M500*	150-500	0.7-5.0	97.0%	0.95	302*125*44.5

Note: *=BH, 0-10V/PWM/Resistor dimming+AUX
DH, DALI+AUX(except 1000NP-M)
XH, DMX-RDM+AUX(except 1000NP-M)
BHC, 0-10V/PWM/Resistor dimming+AUX+Dual-live-line input off default
(BHC only for 1000NP-M, 680/880/1200NP-M Dual-live-line input off default)
BHN, 0-10V/PWM/Resistor dimming+AUX+NTC
DHN, DALI+AUX+NTC(except 1000NP-M)
XHN, DMX-RDM+AUX+NTC(except 1000NP-M)
BHCH, 0-10V/PWM/Resistor dimming+AUX+Dual-live-line input off default+NTC
(BHC only for 1000NP-M, 680/880/1200NP-M Dual-live-line input off default)
The suffix"-C" corresponds to UL Class P models
The suffix"- G" corresponds to the DC ground wire model
Please refer to spec for more details.

NP-ML Series-----Non-isolated, 500-1600W, 200-480Vac, 0-10V/PWM/Resistor dimming, IP67



Features

- ▶ Input voltage: 200-480Vac
- ▶ Efficiency up to 97.5%
- ▶ Slim profile
- ▶ Non-isolated, flicker free
- ▶ Programmable(AOC, CLO, SSA, ELA)
- ▶ 6kV/6kV surge protection
- ▶ 0-10V/PWM/Resistor isolated dimming, dim to off
- ▶ Standby power<0.5W@230Vac, dim to off
- ▶ AUX: 12Vdc
- ▶ RJ25+Knob+panel mount connectors optional
- ▶ Protections: SCP/OTP
- ▶ IP67
- ▶ 5 years warranty

Power Levels

500W 680W 880W 1000W 1200W 1600W


Applications

Horticulture light, Sports light, Fish light

Certificates



Dimension

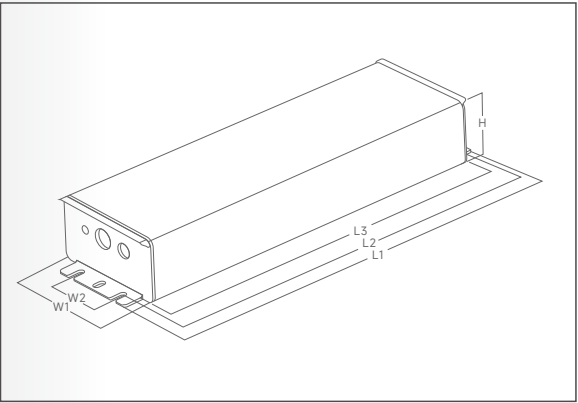

Units : mm						
Model	L1	L2	L3	W1	W2	H
500NP-ML	252	238.5	225	89.5	40	44.5
680NP-ML	297	283	270	89.5	40	44.5
880NP-ML	325	314	294	89.5	40	44.5
1000/1200NP-ML	350	336.5	323	89.5	40	44.5
1600NP-ML	445	430	419	89.5	40	49

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
500	SS-500NP-ML500*	150-500	0.35-2.0	97.0%	0.95	252*89.5*44.5
680	SS-680NP-ML500*	150-500	0.35-2.7	97.0%	0.95	297*89.5*44.5
880	SS-880NP-ML500*	150-500	0.7-3.49	97.0%	0.95	325*89.5*44.5
1000	SS-1000NP-ML500*	150-500	0.7-4.0	97.0%	0.95	350*89.5*44.5
1200	SS-1200NP-ML500*	150-500	0.7-4.76	97.0%	0.95	350*89.5*44.5
1600	SS-1600NP-ML500*	150-500	0.7-6.34	97.5%	0.95	445*89.5*49

Note: *=BH, 0-10V/PWM/Time dimming + AUX
BHN, 0-10V/PWM/Time dimming + AUX +NTC
BHB, intergrated horticulture light LED Driver with knob, network dimming can be realized through RJ25 network interface
BHB-M*, integrated horticulture light LED Driver with knob,Network dimming can be realized through RJ25 network interface, Input M19/Output M19 Panel Mount Connectors
BH-M*, input M19/Output M19/Dimming & AUX M12 Panel Mount Connectors
"-G" is DC output with ground wire
Please refer to spec for more details.

CNH Series-----Circle, Non-isolated, 100-320W, 100-277Vac, DIP switch power/ CCT/Angle, Smart programming, 0-10V/PWM/Resistor/Timing dimming, IP65



Features

- ▶ Input voltage: 100-277Vac
- ▶ Efficiency up to 97%
- ▶ Multi-function can be programmed to reduce SKUs
- ▶ Lifespan: 50k hours@Tc=85°C
- ▶ Function: DIP switch power/CCT, Timing dimming, IEC, ELA, SSA, CLO
- ▶ Protections: IUVP/OTP/OVP/OCP
- ▶ 6kV/6kV surge protection
- ▶ IP65
- ▶ Standby power<0.5W
- ▶ 5 years warranty

Power Levels

100W 150W 200W 240W 320W


Applications

Highbay, Sports light

Certificates



Dimension

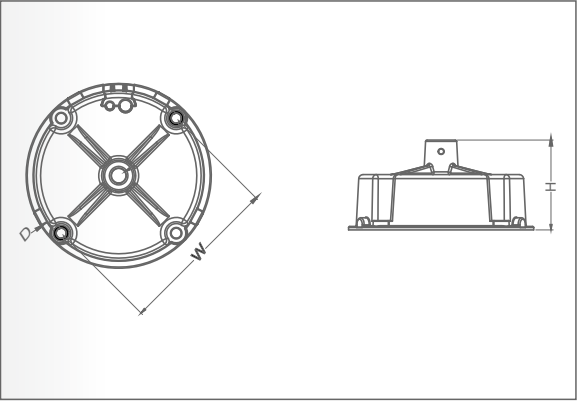

Units : mm


Model	D	W	H
100/150/200CNH	116	113	62.5
240CNH	128	113	62.5
320CNH	146	113	66.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (φ*H)mm
100	SS-100CNH-300*	180-300	0.125-0.5	97.0%	0.97	116*62.5
150	SS-150CNH-300*	180-300	0.187-0.75	97.0%	0.97	116*62.5
200	SS-200CNH-300*	180-300	0.25-1.0	97.0%	0.97	116*62.5
240	SS-240CNH-300*	180-300	0.3-1.2	97.0%	0.97	128*62.5
320	SS-320CNH-300*	180-300	0.4-1.5	97.0%	0.97	146*66.5

Note: *=BB, 1-10V/PWM/Resistor dimming+DIP switch power
BD, 1-10V/PWM/Resistor dimming+DIP switch power/CCT
BHB, 0-10V/PWM/Resistor dimming+AUX+DIP switch power
BHD, 0-10V/PWM/Resistor dimming+AUX+DIP switch power/CCT
BHT, 0-10V/PWM/Resistor dimming+AUX+DIP switch power/CCT/Angle
Please refer to spec for more details.

CNH-G Series--Circle, Non-isolated, 100-240W, 90-264Vac, IP65

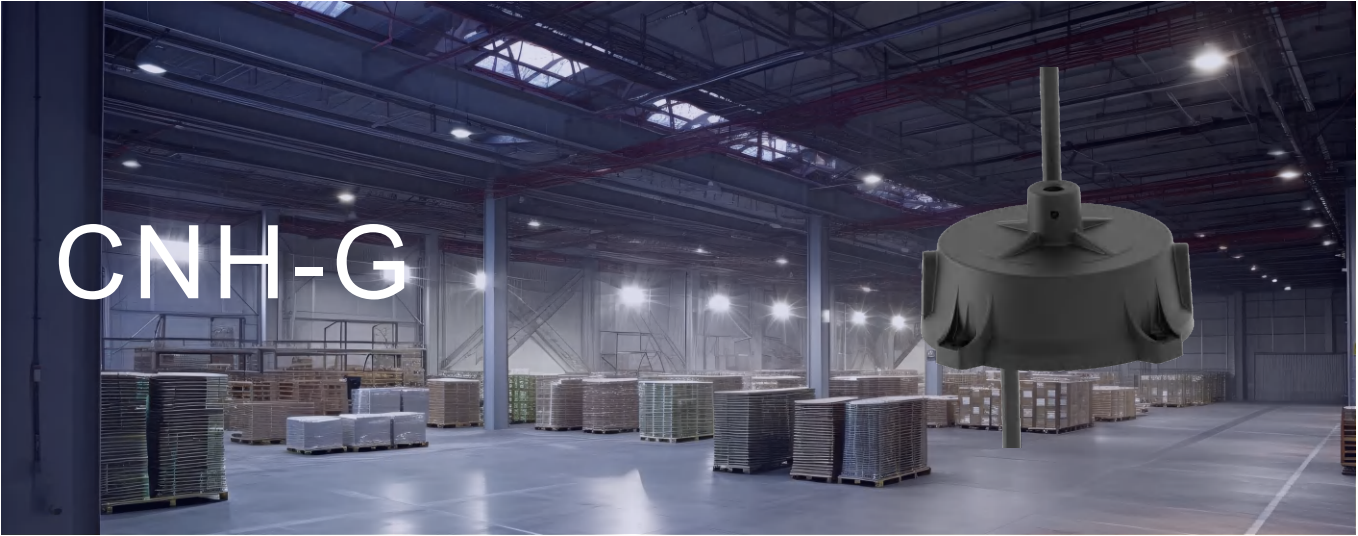

Features

- ▶ Input voltage: 90-264Vac
- ▶ Efficiency up to 97%
- ▶ Lifespan: 50K@Tc=85°C
- ▶ Protections: IUVP/OTP/OVP/OCP
- ▶ 6kV/6kV surge protection
- ▶ IP65
- ▶ 5 years warranty

Power levels

100W 150W 200W 240W


Applications

Highbay, Sports light

Certificates



Dimension

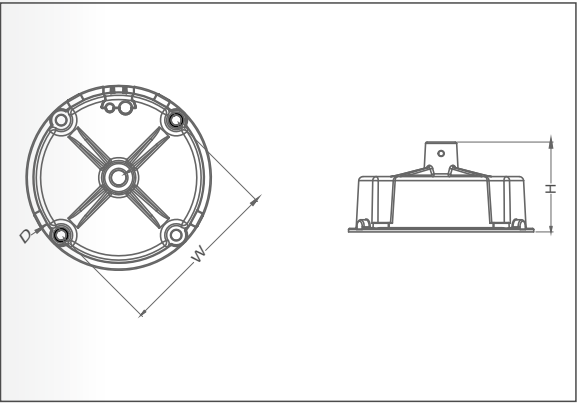

Units : mm

Model	D	W	H
100/150/200/240CNH-G	110	113	59.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current (A)	Efficiency	PF	Dimension(φ*H)mm
100	SS-100CNH-G300	180-300	0.125-0.5	97.0%	0.97	110*59.5
150	SS-150CNH-G300	180-300	0.187-0.75	97.0%	0.97	110*59.5
200	SS-200CNH-G300	180-300	0.25-1.0	97.0%	0.97	110*59.5
240	SS-240CNH-G300	180-300	0.3-1.2	97.0%	0.97	110*59.5

Please refer to spec for more details.

SNH Series-----Circle, Non-isolated, 100-320W, 120-347Vac, 0-10V/PWM/ Resistor/Timer dimming, DIP switch power/CCT, Smart programming, IP65



Features

- ▶ Input voltage: 120-347Vac
- ▶ Efficiency up to 97%
- ▶ Multi-function can be programmed to reduce SKUs
- ▶ Lifespan: 50k hours@Tc=85°C
- ▶ Function: DIP switch power/CCT, Timer dimming, IEC, ELA, SSA, CLO
- ▶ Protections: IUVP/OTP/OVP/OCP
- ▶ 6kV/6kV surge protection
- ▶ IP65
- ▶ Standby power<0.5W
- ▶ 5 years warranty

Power Levels

100W 150W 200W 240W 320W


Applications

Highbay, Sports light

Certificates



Dimension

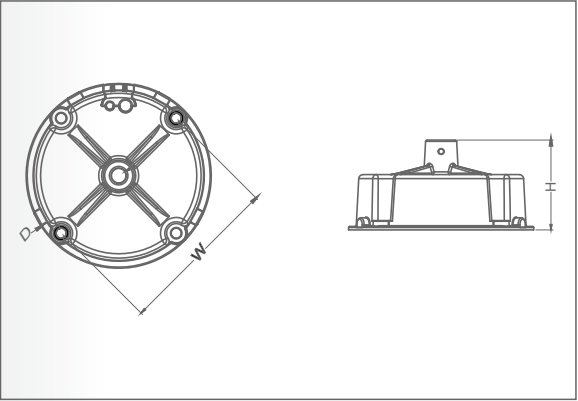

Units : mm

Model	D	W	H
100/150/200SNH	116	113	62.5
240SNH	128	113	62.5
320SNH	146	113	66.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (φ*H)mm
100	SS-100SNH-300*	180-300	0.125-0.5	97.0%	0.97	116*62.5
150	SS-150SNH-300*	180-300	0.187-0.75	97.0%	0.97	116*62.5
200	SS-200SNH-300*	180-300	0.25-1.0	97.0%	0.97	116*62.5
240	SS-240SNH-300*	180-300	0.3-1.2	97.0%	0.97	128*62.5
320	SS-320SNH-300*	180-300	0.4-1.5	97.0%	0.97	146*66.5

Note: *=BHB, 0-10V/PWM/Resistor dimming+AUX+DIP switch power
BHD, 0-10V/PWM/Resistor dimming+AUX+DIP switch power/CCT
BHT, 0-10V/PWM/Resistor dimming+AUX+DIP switch power/CCT/Angle
Please refer to spec for more details.

CNL-E Series-----Circle, Non-isolated, 80-240W, 120-277Vac, DALI-2 dimming, IP65



Features

- ▶ Input voltage: 120-277Vac
- ▶ Efficiency up to 96%
- ▶ Non-isolated, flicker free
- ▶ DALI-2 dimming, dim to off
- ▶ Protections: SCP/OTP/OVP
- ▶ 6kV/6kV surge protection
- ▶ IP65
- ▶ 5 years warranty

Power Levels

80W 120W 150W 200W 240W


Application

Highbay

Certificates



Dimension

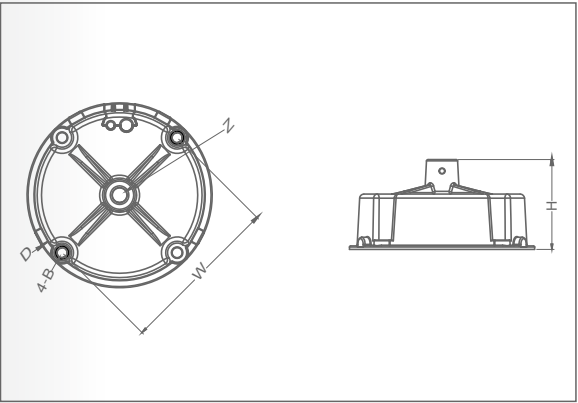

Unites : mm

Model	D	4-B	Z	W	H
80/120/150/200/240CNL-E	128	7	M10	113	62.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (φ*H)mm
80	SS-80CNL-E260D	180-260	0.28-0.4	94.0%	0.97	128*62.5
120	SS-120CNL-E260D	180-260	0.42-0.6	95.0%	0.97	128*62.5
150	SS-150CNL-E260D	180-260	0.52-0.75	95.0%	0.97	128*62.5
200	SS-200CNL-E260D	180-260	0.7-1.0	96.0%	0.97	128*62.5
240	SS-240CNL-E260D	180-260	0.84-1.2	96.0%	0.97	128*62.5

Note: D, DALI dimming
Please refer to spec for more details.

CNS Series -----Circle, Non-isolated, 120-320W, 277-480Vac ,
DIP switch power/CCT, 0-10V/PWM/Resistor dimming, IP65



Features

- ▶ Input voltage: 277-480Vac
- ▶ Efficiency up to 95%
- ▶ Non-isolated, flicker free
- ▶ 0-10V/PWM/Resistor dimming, without afterglow
- ▶ Programmable
- ▶ Function: DIP switch power/CCT
- ▶ Protections: SCP/OTP
- ▶ 6kV/6kV surge protection
- ▶ AUX: 12Vdc
- ▶ IP65
- ▶ 5 years warranty

Power Levels

120W 150W 200W 240W 320W


Application

Highbay

Certificates



Dimension

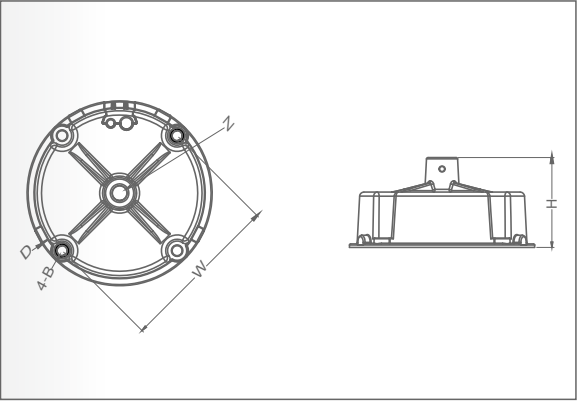

Units : mm					
Model	D	4-B	Z	W	H
120/150/200/240CNS	136	7	M10/G1/2	113	62.5
320CNS	146	7	M12/G1/2	132	61.8

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (φ*H)mm
120	SS-120CNS-260*	180-260	0.3-0.6	94.0%	0.95	136*62.5
150	SS-150CNS-260*	180-260	0.375-0.75	95.0%	0.95	136*62.5
200	SS-200CNS-260*	180-260	0.5-1.0	95.0%	0.95	136*62.5
240	SS-240CNS-260*	180-260	0.6-1.2	95.0%	0.95	136*62.5
320	SS-320CNS-260*	180-260	0.8-1.5	95.5%	0.95	146*61.8

Note: *=BHB, 0-10V/PWM/Resistor dimming+AUX+DIP switch power
BHD, 0-10V/PWM/Resistor dimming+AUX+DIP switch power/CCT
Please refer to spec for more details.

SA Series----Circle, 100-240W, 277-480Vac, 0-10V/PWM/Resistor dimming, IP65



Features

- ▶ Input voltage: 277-480Vac
- ▶ Efficiency up to 93%
- ▶ 0-10V/PWM/Resistor dimming, dim to off
- ▶ Protections: SCP/OTP/IUVP
- ▶ 4kV/4kV surge protection
- ▶ Type HL, suitable for hazardous locations
- ▶ IP65
- ▶ 5 years warranty


Power Levels

100W 150W 240W


Application

Highbay

Certificate



Dimension

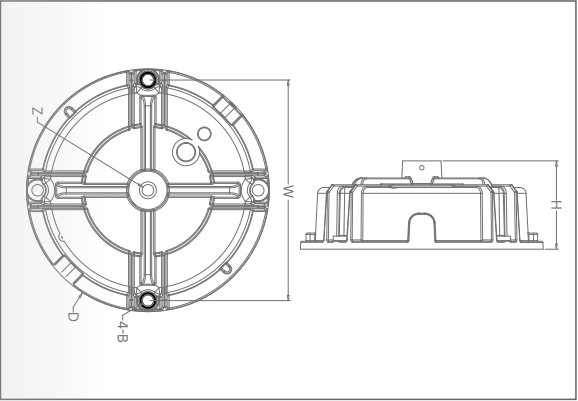

Units : mm

Model	D	4-B	Z	W	H
120/150SA	146	7	12	132	61.8
240SA	178.4	8.5	12	162	66.8

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (φ*H)mm
100	SS-100SA-56BH	22-56	1.2-3.0	92.0%	0.95	146*61.8
150	SS-150SA-56BH	22-56	2.1-4.2	92.0%	0.95	146*61.8
240	SS-240SA-56BH	32-56	3.3-6.7	93.0%	0.95	178.4*66.8

Note: BH, 0-10V/PWM/Resistor dimming+AUX
Please refer to spec for more details.

CA Series--Circle, 100-480W, 100-277Vac,
0-10V/PWM/Resistor/DALI-2 dimming, IP65



CA

Features

- ▶ Input voltage: 100-277Vac
- ▶ Efficiency up to 94%
- ▶ Constent power, flicker free
- ▶ Protections: SCP/OTP/OPP
- ▶ 0-10V/PWM/Resistor dimming, DALI-2, dim to off
- ▶ AUX: 12Vdc
- ▶ Standby power<0.5W
- ▶ 6kV/6kV surge protection
- ▶ Type HL, suitable for hazardous locations
- ▶ IP65
- ▶ 5 years warranty

Power Levels

100W 150W 200W 240W 300W 480W


Application

Highbay

Certificates



Dimension

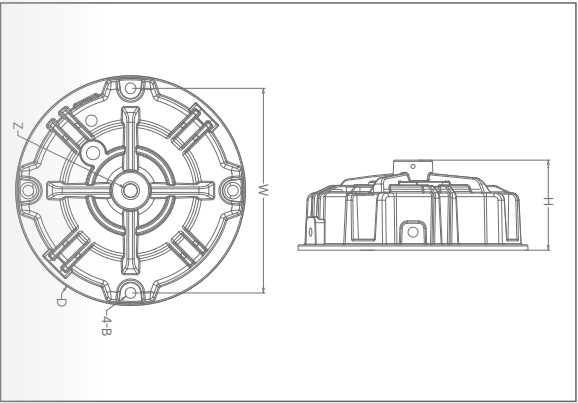

Units : mm					
Model	D	4-B	Z	W	H
100CA	132	7	10	113	71.5
150/200CA	151	7	12	132	71.5
240/300CA	182	8.5	12	162	71.5
480CA	208	8.5	20	192	69.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (φ*H)mm
100	SS-100CA-56*	28-56	1.5-3.0	90.0%	0.98	132*71.5
150	SS-150CA-56*	28-56	2.1-4.2	92.0%	0.97	151*71.5
200	SS-200CA-56*	28-56	2.8-5.6	92.0%	0.97	151*71.5
240	SS-240CA-56*	28-56	3.3-6.7	93.0%	0.98	182*71.5
300	SS-300CA-56*	28-56	4.2-8.4	94.0%	0.98	182*71.5
480	SS-480CA-228*	114-228	2.1-2.8	94.0%	0.98	208*69.5

Note: *=BH, 0-10V/PWM/Resistor dimming+AUX
DH, DALI dimming+AUX
Please refer to spec for more details.

CP Series----Circle, 100-240W, 120-277Vac, 0-10V/PWM/Resistor dimming, IP65



Features

- ▶ Input voltage: 120-277Vac
- ▶ Efficiency up to 93%
- ▶ Flicker free
- ▶ Protections: SCP/OTP/OVP/OPP
- ▶ 0-10V/PWM/Resistor dimming
- ▶ 4kV/4kV surge protection
- ▶ IP65
- ▶ 5 years warranty

Power Levels

100W 150W 200W 240W


Application

Highbay

Certificates



Dimension

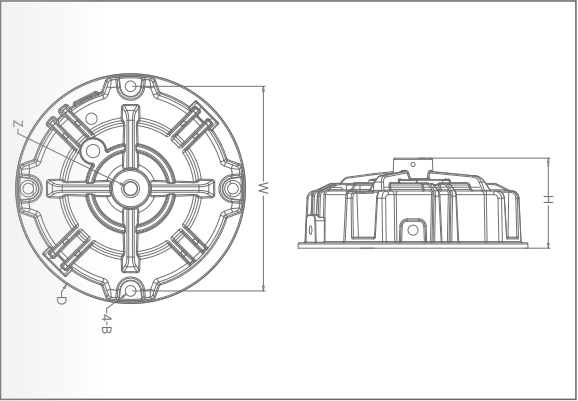

Units : mm

Model	D	4-B	Z	W	H
100CP	132	7	10	113	71.5
150/200CP	151	7	12	132	71.5
240CP	182	8.5	12	162	71.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (φ*H)mm
100	SS-100CP-54B	28-54	1.5-3.0	90.0%	0.97	132*71.5
150	SS-150CP-54B	28-54	2.1-4.2	93.0%	0.97	151*71.5
200	SS-200CP-54B	28-54	2.8-5.6	93.0%	0.97	151*71.5
240	SS-240CP-54B	28-54	3.3-6.7	93.0%	0.98	182*71.5

Note: B, 1-10V/PWM/Resistor dimming
Please refer to spec for more details.

CF Series-----Circle, Explosion proof drive, 40-120W, 100-240Vac, 0-10V/PWM/Resistor dimming, IP65



Features

- ▶ Input voltage: 100-240Vac
- ▶ Efficiency up to 91.8%
- ▶ 0-10V/PWM/Resistor dimming, dim to off
- ▶ Protections: SCP/OTP/OVP/IUVP
- ▶ 6kV/4kV surge protection
- ▶ AUX: 12Vdc
- ▶ IP65
- ▶ 5 years warranty

Power Levels

40W 60W 80W 120W


Application

Explosion proof light

Certificate



Dimension

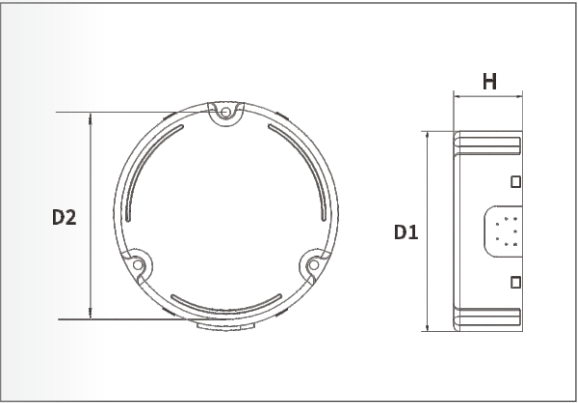

Units : mm

Model	D1	D2	H
40CF	75	65	38
60CF	90	80	38
80/120CF	110	100	38

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (D1*H*D2)mm
40	SS-40CF-58*	30-58	0.42-1.05	91.1%	0.95	75*38*65
60	SS-60CF-58*	30-58	0.6-1.4	90.0%	0.95	90*38*80
80	SS-80CF-58*	30-58	0.83-1.78	91.6%	0.95	110*38*100
120	SS-120CF-58*	30-58	1.05-2.1	91.8%	0.95	110*38*100

Note: *=Blank, ON-OFF version
BH, 0-10V/PWM/Resistor dimming+AUX
Please refer to spec for more details.

NH-V Series-----Non-isolated, 80-320W, 100-277Vac, Smart programming, Timing dimming, Connector



Features

- ▶ Input voltage: 100-277Vac
- ▶ Efficiency up to 97%
- ▶ Multi-function can be programmed to reduce SKUs
- ▶ Lifespan: 50k hours@Tc=85°C
- ▶ Function: Dip-switch/CCT, Timing dimming, IEC, ELA, SSA, CLO
- ▶ Protections: IUVP/OTP/OVP/OCP
- ▶ 6kV/6kV surge protection
- ▶ Standby power<0.5W
- ▶ 5 years warranty

Power Levels

80W 100W 150W 200W 240W 320W


Applications

Linear highbay, Flood light, Shoebox light, Wallpack

Certificates



Dimension

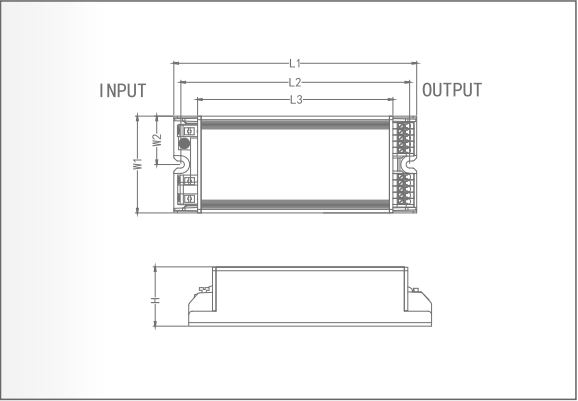

Units : mm

Model	L1	L2	L3	W1	W2	H
80/100NH-V	138	130	111	55	27.5	32
150NH-V	160	152	133	55	27.5	32
200NH-V	172	164	145	55	27.5	34
240NH-V	192	184	165	55	27.5	34
320NH-V	225	217	198	55	27.5	34

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
80	SS-80NH-V300*	180-300	0.1-0.4	97.0%	0.97	138*55*32
100	SS-100NH-V300*	180-300	0.125-0.5	97.0%	0.97	138*55*32
150	SS-150NH-V300*	180-300	0.187-0.75	97.0%	0.97	160*55*32
200	SS-200NH-V300*	180-300	0.25-1.0	97.0%	0.97	172*55*34
240	SS-240NH-V300*	180-300	0.3-1.2	97.0%	0.97	192*55*34
320	SS-320NH-V300*	180-300	0.375-1.5	97.0%	0.97	225*55*34

Note:*=BHB, 0-10V/PWM/Resistor dimming+AUX(12V)+DIP switch power
BB, 0-10V/PWM/Resistor dimming+DIP switch power
A, 0-10V/PWM/Resistor dimming+AUX+DIP switch power+Sensor+NTC
Please refer to spec for more details.

NM-V Series-----Non-isolated, 80-320W, 120-347Vac ,
Smart programming, Timing dimming, Connector



Features

- Input voltage: 120-347Vac
- Efficiency up to 97%
- Multi-function can be programmed to reduce SKUs
- Lifespan: 50k hours@Tc=85°C
- Function: Dip-switch/CCT, Timing dimming, IEC, ELA, SSA, CLO
- Protections: IUVP/OTP/OVP/OCP
- 6kV/6kV surge protection
- Standby power<0.5W
- 5 years warranty

Power Levels

80W 100W 150W 200W 240W 320W


Appications

Linear highbay , Flood light , Shoebox light , Wallpack

Certificates



Dimension

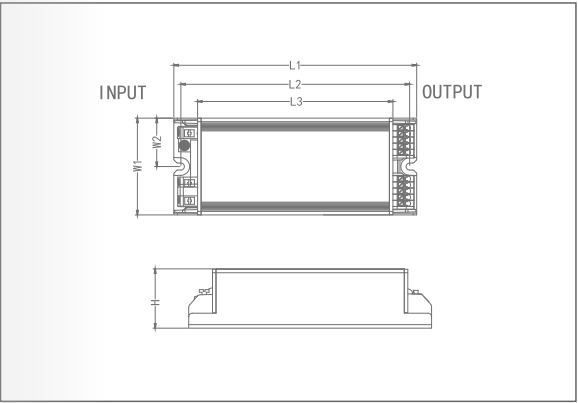

Units : mm

Model	L1	L2	L3	W1	W2	H
80/100NM-V	138	130	111	55	27.5	32
150NM-V	160	152	133	55	27.5	32
200NM-V	172	164	145	55	27.5	34
240NM-V	192	184	165	55	27.5	34
320NM-V	225	217	198	55	27.5	34

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
80	SS-80NM-V300A	180-300	0.1-0.4	97.0%	0.97	138*55*32
100	SS-100NM-V300A	180-300	0.125-0.5	97.0%	0.97	138*55*32
150	SS-150NM-V300A	180-300	0.187-0.75	97.0%	0.97	160*55*32
200	SS-200NM-V300A	180-300	0.25-1.0	97.0%	0.97	172*55*34
240	SS-240NM-V300A	180-300	0.3-1.2	97.0%	0.97	192*55*34
320	SS-320NM-V300A	180-300	0.375-1.5	97.0%	0.97	225*55*34

Note: A, 0-10V/PWM/Resistor dimming+ AUX+DIP switch power+Sensor+NTC
Please refer to spec for more details.

NH-E Series-----Non-isolated, 60-320W, 120-277Vac ,
DALI-2 dimming



Features

- Input Voltage: 120-277Vac
- Efficiency up to 95%
- Non-isolated, flicker free
- DALI-2 dimming
- Protections: SCP/OTP/OVP
- 6kV/6kV surge protection
- 5 years warranty

Power Levels

60W 80W 120W 160W 200W 240W 320W


Applications

Linear highbay, Shoebox light, Wallpack, Flood light

Certificates



Dimension

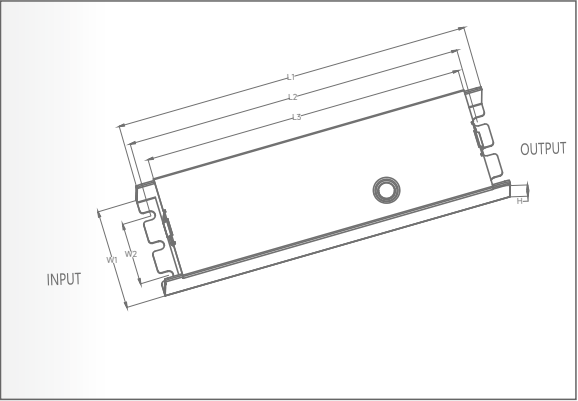

Units : mm

Model	L1	L2	L3	W1	W2	H
80NH-ED	150	140.5	132	52.5	32	34
120/160NH-ED	185	175.5	167	52.5	32	34
200/240NH-ED	197	185.5	179	52.5	32	34
320NH-ED	220	210.5	202	52.5	32	34

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
60	SS-60NH-E260D	180-260	0.23-0.3	93.0%	0.97	150*52.5*34
80	SS-80NH-E260D	180-260	0.28-0.4	94.0%	0.97	150*52.5*34
120	SS-120NH-E260D	180-260	0.42-0.6	95.0%	0.97	185*52.5*34
160	SS-160NH-E260D	180-260	0.56-0.8	95.0%	0.97	185*52.5*34
200	SS-200NH-E260D	180-260	0.7-1.0	95.0%	0.97	197*52.5*34
240	SS-240NH-E260D	180-260	0.84-1.2	95.0%	0.97	197*52.5*34
320	SS-320NH-E260D	180-260	1.1-1.5	95.0%	0.97	220*52.5*34

Note: D, DALI
Please refer to spec for more details.

NS Series-----Non-isolated, 120-320W, 277-480Vac ,
0-10V/PWM/Resistor dimming, DIP Switch Power/Sensor



Features

- Input voltage: 277-480Vac
- Efficiency up to 94.5%
- High PF, flicker free
- Programmable
- 0-10V/PWM/Resistor dimming, without afterglow, DIP switch power/Sensor
- Protections: SCP/OTP/OVP
- AUX: 12Vdc
- 6kV/6kV surge protection
- 5 years warranty

Power Levels

120W 160W 200W 240W 320W


Application

Highbay

Certificates



Dimension

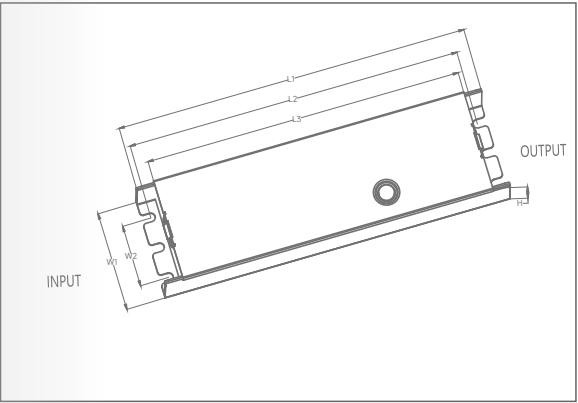

Units : mm						
Model	L1	L2	L3	W1	W2	H
120/160NS	192	182.5	174	32	52.5	34
200/240NS	220	210.5	202	32	52.5	34
320NS	230	220.5	212	32	52.5	34

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension (L*W*H)mm
120	SS-120NS-260*	180-260	0.42-0.6	93.0%	0.95	192*52.5*34
160	SS-160NS-260*	180-260	0.56-0.8	94.0%	0.95	192*52.5*34
200	SS-200NS-260*	180-260	0.7-1.0	94.0%	0.95	220*52.5*34
240	SS-240NS-260*	180-260	0.84-1.2	94.0%	0.95	220*52.5*34
320	SS-320NS-260*	180-260	1.05-1.5	94.5%	0.95	230*52.5*34

Note: *=BH, 0-10V/PWM/Resistor dimming+12V AUX
BHB, 0-10V/PWM/Resistor dimming+12V AUX+DIP switch power
BHP, 0-10V/PWM/Resistor dimming+12V AUX+Sensor
BHBP, 0-10V/PWM/Resistor dimming+12V AUX+DIP switch power+Sensor
Please refer to spec for more details.

L-E Series-----80/100W, 120-277Vac, 0-10V/PWM/Resistor dimming



Features

- ▶ Input Voltage: 120-277Vac
- ▶ Efficiency up to 91%
- ▶ Flicker free
- ▶ 0-10V/PWM/Resistor dimming, dim to off
- ▶ Class 2
- ▶ Protections: SCP/OTP/OVP
- ▶ Type HL, suitable for hazardous locations
- ▶ 6kV/4kV surge protection
- ▶ 5 years warranty

Power levels

80W 100W


Applications

Linear highbay, Shoebox light, Wallpack, Flood light

Certificates



Dimension

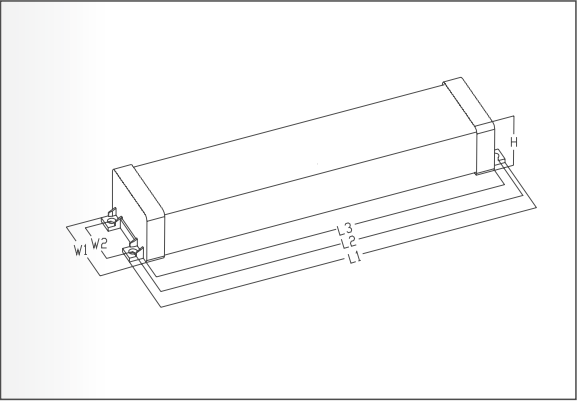

Units : mm

Model	L1	L2	L3	W1	W2	H
80/100L-E	179.5	171	163	45.5	28	31.5

Specification

Output Power(W)	Model	Output Voltage(V)	Output Current(A)	Efficiency	PF	Dimension(L*W*H)mm
80	SS-80L-E54B	28-54	1.48-2.2	89.0%	0.97	179.5*45.5*31.5
100	SS-100L-E42B	28-42	2.38-2.78	91.0%	0.97	179.5*45.5*31.5
100	SS-100L-E54B	38-54	1.85-2.08	91.0%	0.97	179.5*45.5*31.5

Note: B, 0-10V/PWM/Resistor dimming
Please refer to spec for more details.

DMXRC-----DMX decoded and converted to 0-10V analog dimming signal




Features

- ▶ DMX512 and RDM interface protocols are supported
- ▶ DMX decoded and converted to 0-10V analog dimming signal
- ▶ Linear and logarithmic dimming curves are optional
- ▶ Supports default output value and off-network hold value mode
- ▶ Supports RDM address setting and DMX512 channel setting
- ▶ Supports onsite intelligent addressing
- ▶ Supports relay mode, bus mode and mixed mode
- ▶ IP67

Certificates



Dimension

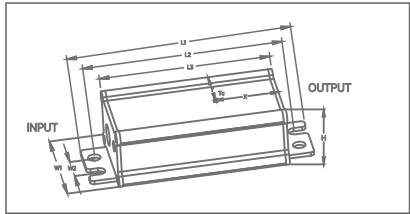


Units : mm

Model	L1	L2	L3	W1	W2	H
DMXRC	90.5	80.5	69.5	38	11	24.5

OPX-S Features

- ▶ Operation voltage: 12Vdc
- ▶ Programmable
- ▶ DIY function(Photocell function, DIP switch for power adjustable)
- ▶ 0-10V dimming(positive and negative optional)
- ▶ Compact design,easy to install

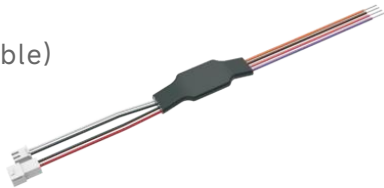

SPD-----10kV/20kV surge protection , 100-277Vac



Features

- ▶ Input voltage: 100-277Vac
- ▶ Protection mode: L-N, L-PE, N-PE
- ▶ Suitable for surge protection LED Driver
- ▶ Safety standard: EN61643_11, IEC61000_4_5,GB18802.1
- ▶ IP67

Certificates



Surge

10kV 20kV

Specification

Max.Surge Resistance Voltage (kV)	Model	Max.Surge Resistance Voltage(Line-Line)	Discharge Current In (Max)	Clamping Voltage	Life time (Times)	Connection	Wire Spec	Dimension (L*W*H)mm
10	SS-SPD-US10	10	5	≤1400	15	series	18AWG	43.6*40.5*30
10	SS-SPD-UP10	10	5	≤1400	15	parallel	18AWG	43.6*40.5*30
10	SS-SPD-10kV	10	5	≤1500	60	series	3*1.0mm ²	129.8*37*17.5
20	SS-SPD-20kV	20	10	≤1500	60	series	3*1.0mm ²	84*38*42.5