



SPECIFICATIONS


SS-500NP-360* CC DRIVER

Model: SS-500NP-360*

Power: 500W

Rev.: V03


Release date: 2026-02-28

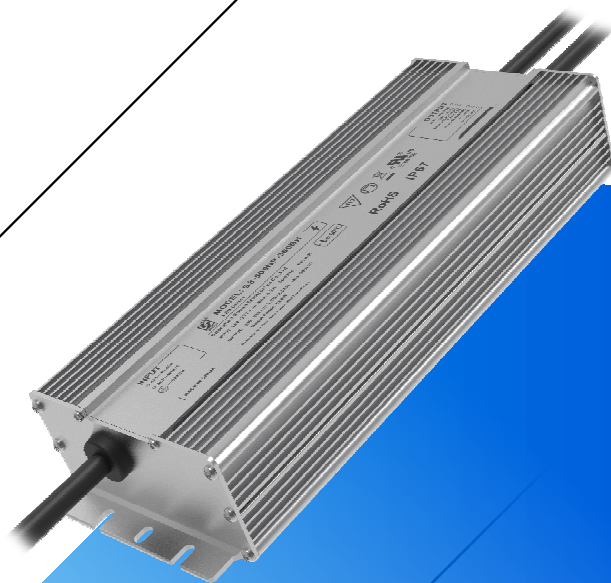

SS-500NP-360XX Series LED Driver

Features

- Efficiency up to 96.5%
- Dimming: 0-10V,PWM,Resistor,Timing
- Surge protection: CM: 6kV, DM: 6kV
- AUX Power: 12V/0.2A
- Standby Power<0.5W
- IP67
- Communication with PC
- Protections: SCP/OTP
- Warranty: 5 years

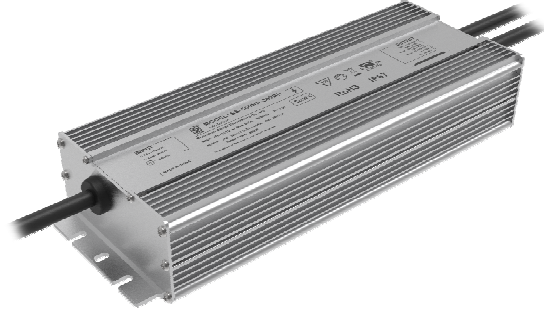

Description

SS-500NP-360XX is 500W non-isolated constant current LED Driver with 90-305Vac input and wide O/P voltage range and adjustable O/P current by program. LED luminaire manufactures can easily design luminaires and reduce cost

Applications:

Horticulture lighting, High pole lighting, Stadium lighting, Fish lighting

Model List:

Model	AC Input Range	Max. Pout	Vout Range	Full Power Vo Range	Iout	THD (Typ.)	PF (Typ.)	Eff. (Typ.)	Max.Tc
SS-500NP-360*	90-305Vac	500W	210-360V	240-360V	0.35-2.08A	6%	0.98	96%	90°C

Note:

1.Default Tested: at 220Vac, full load, Ta 25°C;

2.The performance of the LED Driver can be guaranteed within the full power Vo range. The voltage lower than full power Vo range, it is need to test the performance with the LED module ;

SS-500NP-360XX Series LED Driver

“*” Means Additional Function

“*”	DALI (suffix:D)	AUX 12V (suffix:H)	Dimming off 0-10V/PWM/Resistor	1-10V/PWM /Resistor (suffix:B)	Remark
No Suffix					
BH		✓	✓		
BHC		✓	✓		

Input Characteristics:

Parameter	Min.	Typ.	Max.	Remark
Rated AC Input Range	100Vac		277Vac	Ref. derating curve
AC Input Range	90Vac		305Vac	Ref. derating curve
Input Frequency Range	47Hz	50/60Hz	63Hz	
Max Input Current			6.2A	100Vac
Max Input Power			620W	100Vac
Max Inrush Current(120Vac)			20A	Cold start
Max Inrush Current(220Vac)			25A	Cold start
Max Inrush Current(277Vac)			30A	Cold start
Standby Power			0.5W	220Vac/50Hz, Dim-off, BH Model
Power Factor	0.95	0.98		220Vac/50Hz, Full load
	0.90			100-277Vac, 70-100% load
THD		6%	8%	220Vac/50Hz, Full load, Ta=25°C
			15%	100-277Vac, 70-100% load, Ta=25°C

SS-500NP-360XX Series LED Driver

O/P Characteristics:

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	210V		360V	Power derated @210-240V
Rated O/P Voltage	240V		360V	Po=Vo*Io=500W, Full load
Rated O/P Current	1.38A		2.08A	2.08A for 240V,1.38A for 360V
Adj. O/P Current (AOC)Range	0.35A		2.08A	Adjustable by program
No Load Voltage			390V	
Efficiency @120Vac	91.0%	93.0%		O/P 360V/1.38A
Efficiency @220Vac	94.0%	96.0%		O/P 360V/1.38A
Efficiency @277Vac	94.5%	96.5%		O/P 360V/1.38A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			1.0S	120Vac,Full load
			0.5S	220Vac,Full load
Line Regulation	-2%		+2%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc:0°C~90°C
OTP	90°C	100°C	110°C	>Tc Typ., Current derating <Tc Min., Current recovery
Short Circuit Protection				Driver will not be damaged, Constant current mode

SS-500NP-360XX Series LED Driver

Other Characteristics:

Parameter		Min.	Typ.	Max.	Remark
AUX Power	O/P Voltage	10.8V	12V	13.8V	
	O/P Current			200mA	
0-10V Dimming (Optional)	Dim Vmax	0V		12V	Negative dimming by programming
	Dim Range	10%loset		100%loset	DIM+ source current 110uA .
	Rec.Dim Range	0V		10V	Dimming prohibits reverse connection.
PWM Dimming (Optional)	PWM High	9.8V		10.2V	Negative dimming by programming
	PWM Low	0V		0.3V	DIM+ source current 110uA .
	Frequency	1KHz		2KHz	Dimming prohibits reverse connection.
	PWM Duty	0%		100%	
Resistor Dimming (Optional)	Resistance	0Kohm		100Kohm	
	Dim Range	10%loset		100%loset	DIM+ source current 110uA .
Dim to Off	Dim-off	7%	8%	9%	By DC voltage, PWM,dimming ratio
	Dim-on	9%	10%	12%	By DC voltage, PWM,dimming ratio
Timing Curve(Optional)		By programming			Set by program
Constant Lumen(Optional)		By programming			Set by program
Life Warning(Optional)		By programming			Set by program
Life Time(Tc≤75°C)		50,000 hours			80% Load
MTBF		200,000 hours			220Vac,Full load, Ta=25°C (MIL-HDBK-217F)
IP Grade		IP67			
Tc		90°C			
Warranty		5 years			Tc:75°C
Net Weight		1660g			
Dimension		252mm*89.5mm*44.5mm			L x W x H

NOTE:

- 1.All the parameters above are tested Ta 25°C and LED load, unless specified.
2. When using resistor dimming (parallel connection of dimming wires), if the number of parallels is: N, the dimming resistor should be realized 0-100% dimming range, resistance value: 101KΩ/N.

SS-500NP-360XX Series LED Driver

Environmental Requirements

Parameter	Min.	Typ.	Max.	Remark
Operating Temperature(Tcase)	-40°C	25°C	+90°C	
Storage Temperature	-40°C	25°C	+90°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4000m	

Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
UL/cUL	UL8750	✓	
ENEC	EN 61347-1 EN 61347-2-13 EN IEC62384	✓	
RCM	AS/NZS61347.2.13		
CCC	GB/T 19510.1;GB/T 19510.213	✓	
CE	EN 61347-1 EN 61347-2-13 EN 62493	✓	

EMI/EMS	Criterion	Remark
Conduction Emission	EN IEC 55015	
Radiation Emission	EN IEC 55015	
Harmonic Current Emissions	IEC/EN 61000-3-2	Class C
Surge	IEC/EN61000-4-5	DM: 6kV,CM: 6kV,Criterion B
	ANSI/C82.77-5	DM: 6kV,CM: 6kV,Criterion B
Ring Wave	IEC/EN 61000-4-12;ANSI/C82.77-5	DM: 6kV,CM: 6kV,Criterion B

SS-500NP-360XX Series LED Driver

Safety Test Items:


Safety Test Items	Technical Indicators			Remark
Insulation Requirements	UL Insulation Requirements	ENEC Insulation Requirements	CCC Insulation Requirements	
Input-Case	2U+1000	2U+1000	2U+1000	Basic insulation
Input-Dim	2U+1000	4U+2000	4U+2000	Reinforced insulation
Dim-Case	500Vac	500Vac	500Vac	Basic insulation
Insulation Resistance	≥10MΩ			Input-DIM, Test voltage:500Vdc
Ground Resistance	≤0.1Ω			25A/1min
Leakage Current	≤0.75mA			277Vac

NOTE:

1. SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference as component.
2. Please short (ACL and ACN), (V+ and V-), (Dim+ and Dim - and Vaux+) when Hi-pot test (Please short ACL and ACN and V+ and V- for BHC model) .

Performance Curves:

Input Inrush Current

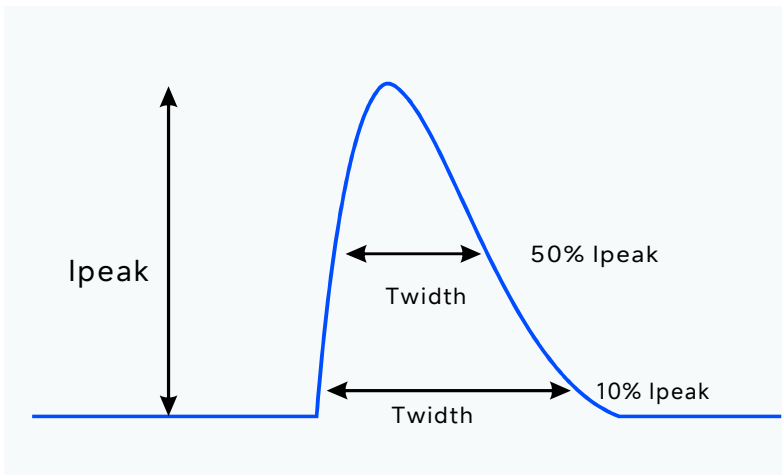


Vin	Ipeak	T(@10% of Ipeak)	T(@50% of Ipeak)
120Vac	20A	5.5mS	
220Vac	25A		2mS
277Vac	30A	5.5mS	


SS-500NP-360XX Series LED Driver

Performance Curves:

O/P Voltage Vs. O/P Current(Dim/AOC Window)

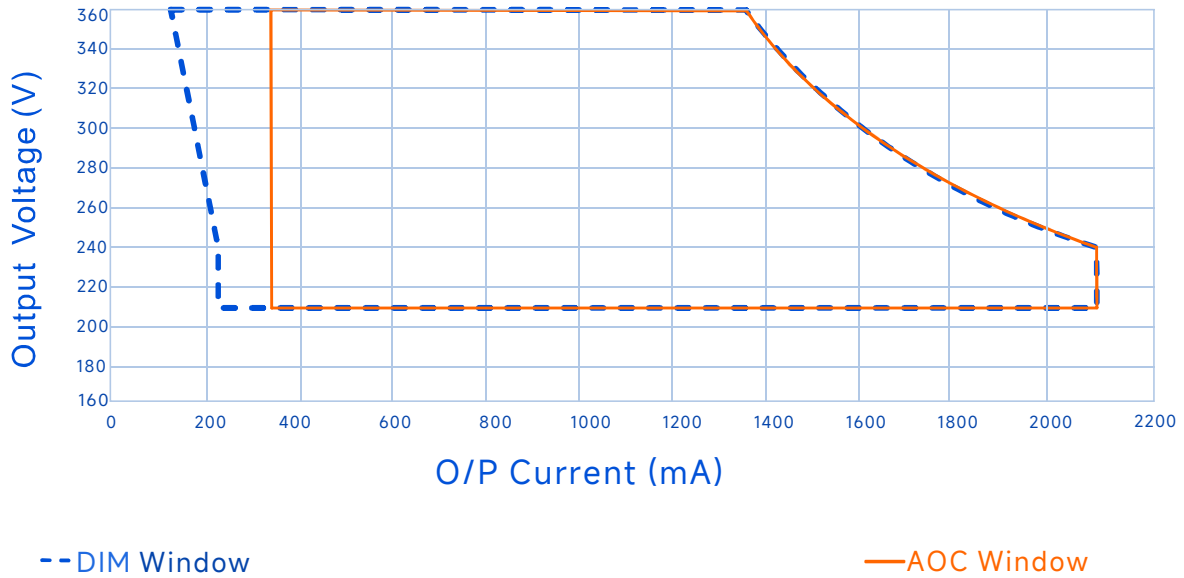


Efficiency Vs. O/P Voltage (Vin=120Vac)

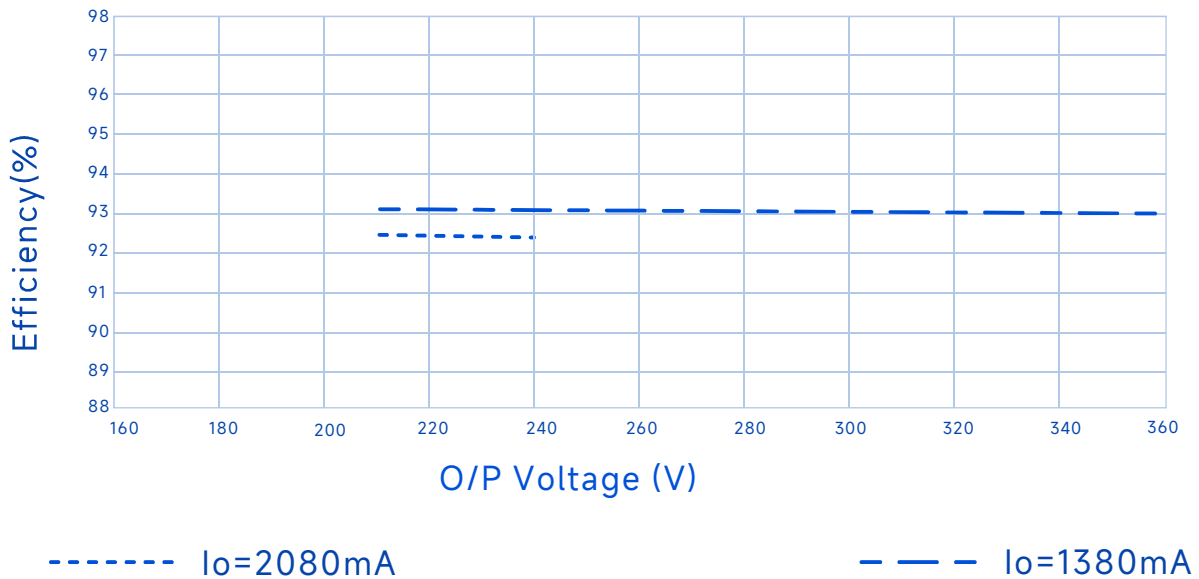


SS-500NP-360XX Series LED Driver

Performance Curves:

Efficiency Vs. O/P Voltage ($V_{in}=220V_{ac}$)

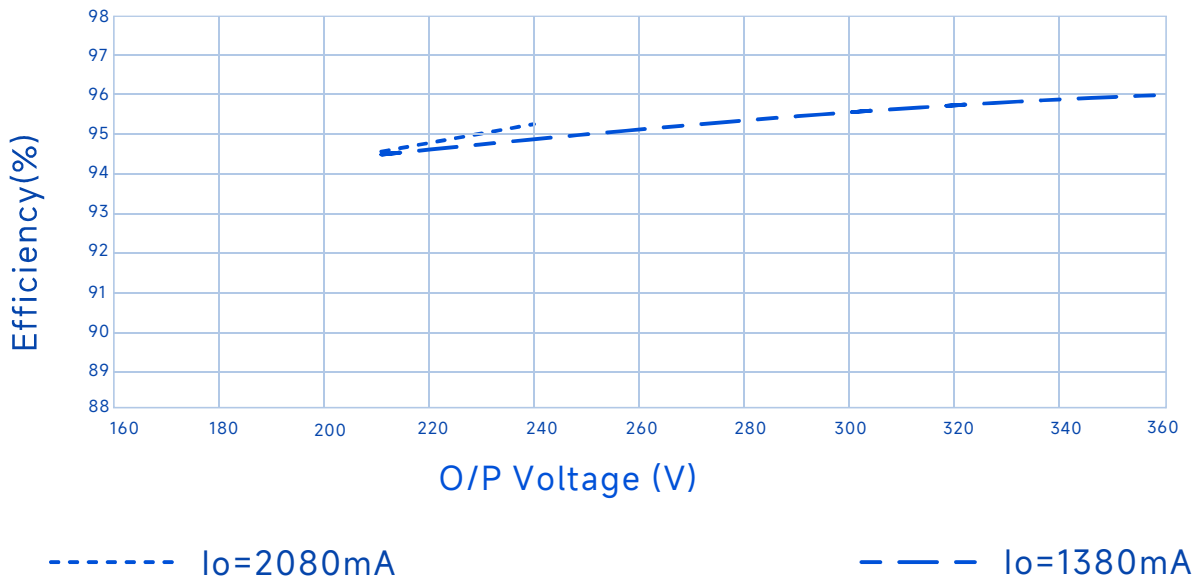


Efficiency Vs. O/P Voltage ($V_{in}=277V_{ac}$)

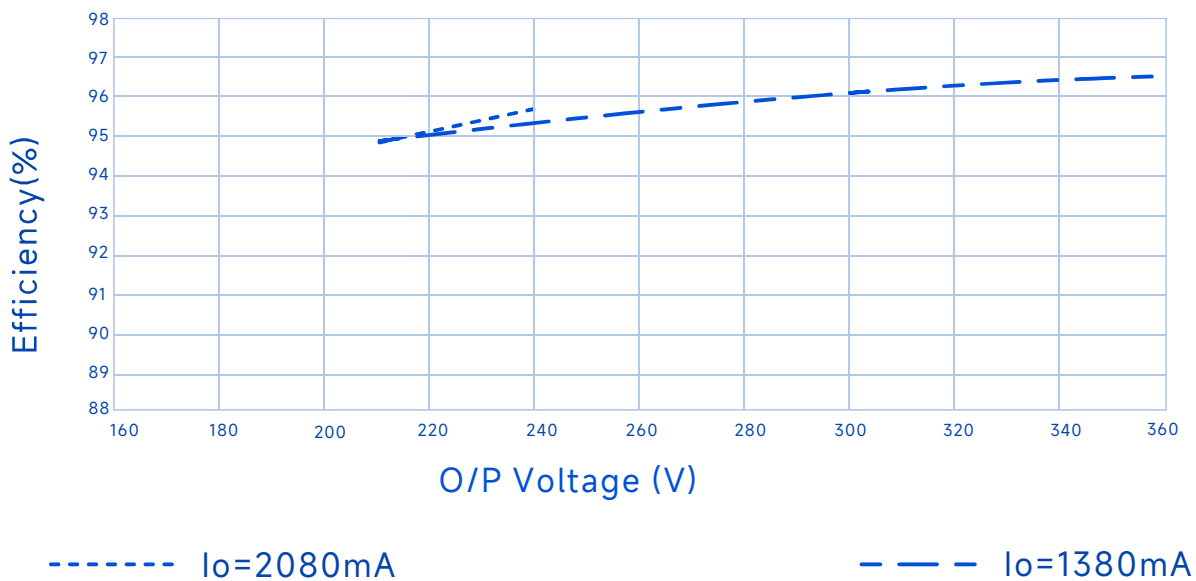

SS-500NP-360XX Series LED Driver


Performance Curves:

Power Factor Vs. O/P Power

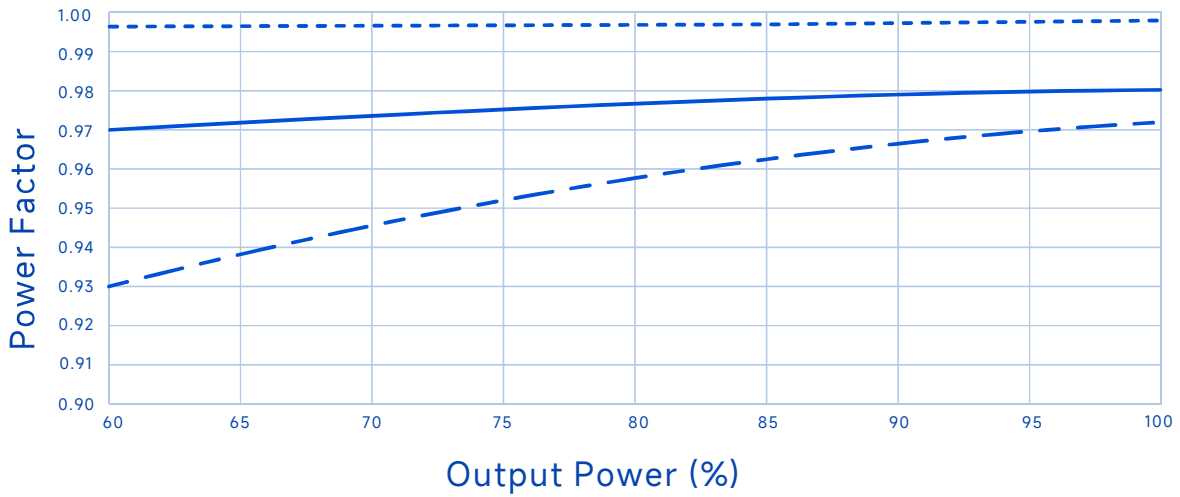

----- Vin=120Vac _____ Vin=220Vac - . - . Vin=277Vac

THD Vs. O/P Power

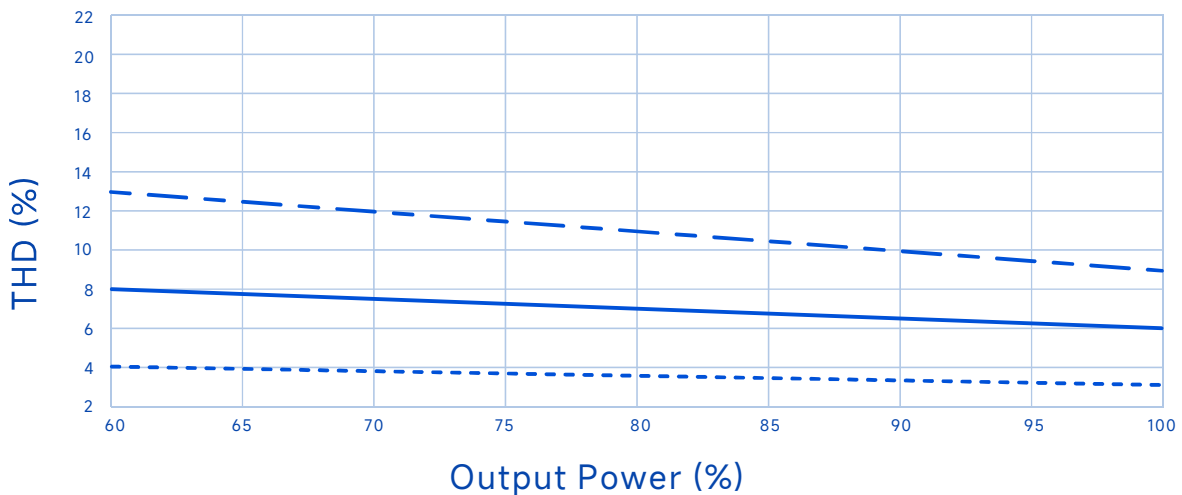


----- Vin=120Vac _____ Vin=220Vac - . - . Vin=277Vac


SS-500NP-360XX Series LED Driver

Performance Curves:


O/P Power Vs. Input Voltage

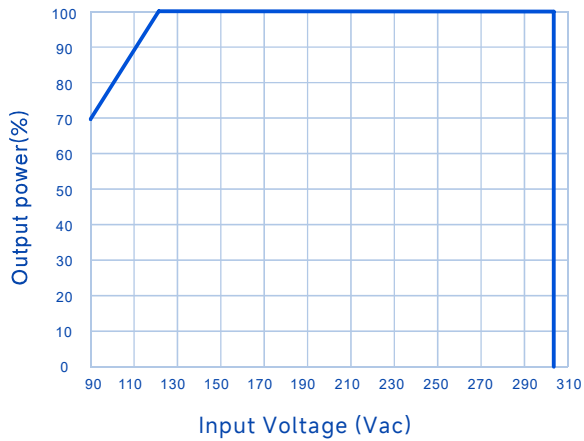


O/P Power Vs. Case Temperature

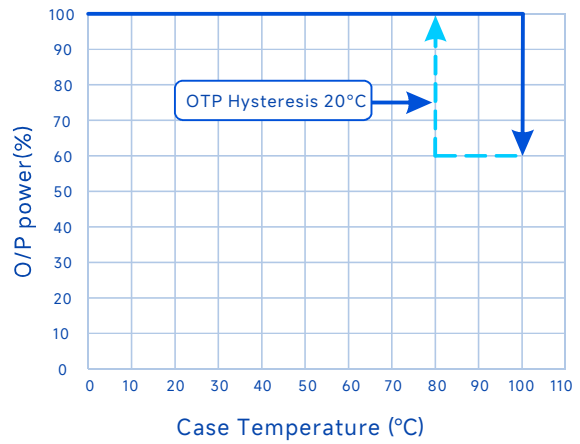

O/P Power Vs. Dimming

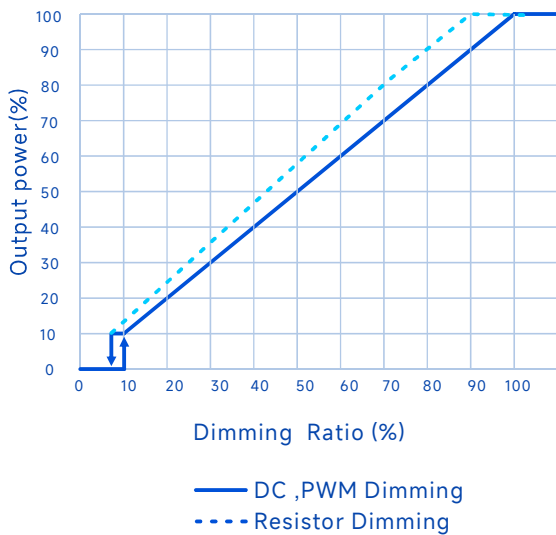

Lifetime Vs. Case Temperature

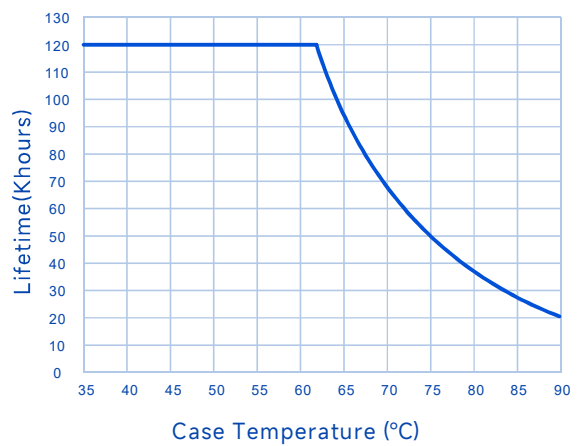

SS-500NP-360XX Series LED Driver

Constant Lumen Output


Constant Lumen Output are design to maintain fixture's stable output lumen by increasing driver's output current within driver's life span to counteract LED lumen degradation.

Programming connection diagram:

Legacy Timer: Driver's O/P follows the pre-programmed timing curve after turn-on.

Auto-Adjust by Percentage: Driver's O/P will be adjusted by automatically changed dimming curve by the period percentage based on the latest 5 dimming curve.

Auto-Adjust by Mid-point: Driver's O/P will be adjusted by automatically changed dimming curve by mid-point based on the latest 5 dimming curve.

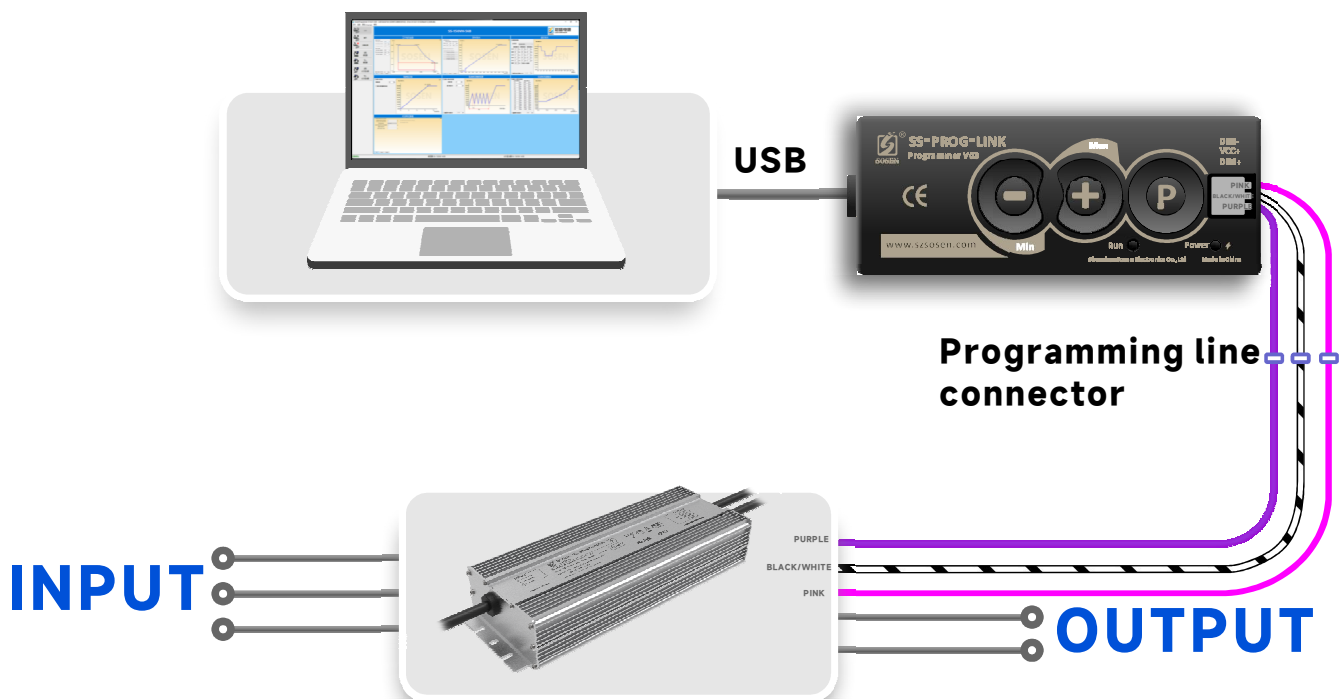


Note:

Programming could be completed by off-line mode either without turn on the driver or without PC, other than the traditional on-line mode.

SS-500NP-360XX Series LED Driver

Mechanical Characteristics

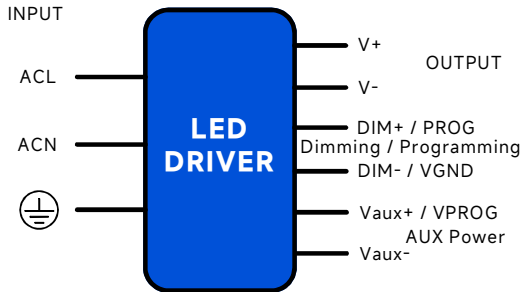

AC Input Cable(Exposed Length $450 \pm 10\text{mm}$):

UL model: SJTW,3*18AWG,O.D: 7.8mm,Black:ACL,White:ACN,Green:⊕
 EU model: H05RN-F,3*1.0mm²,O.D: 7.3mm,Brown:ACL,Blue:ACN,
 Yellow/Green:⊕

DC O/P Cable(Exposed Length $250 \pm 10\text{mm}$):

UL model: SJTW,2*18AWG,O.D: 7.3mm,Red: V+, Black: V-
 EU model: H05RN-F,2*1.0mm²,O.D: 7.0mm,Brown: V+, Blue: V-

DIM/AUX Power/Programming Cable (Exposed Length $220 \pm 10\text{mm}$):

UL/EU model: STYLE 21996, 4*22AWG, O.D: 5.6mm, Purple: DIM+, Pink: DIM-,
 Black/White: Vaux+, Blue/White: Vaux-

Name Description	Standard Code	mm(In.)
Case Length	L3	225(8.86)
Case Width	W1	89.5(3.52)
Case Height	H	44.5(1.75)
Overall Length	L1	252(9.92)
Mounting Hole Length	L2	238.3(9.38)
Mounting Hole Width	W2	40(1.57)
TC Point Position	X	116(4.57)
TC Point Position	Y	45(1.77)


Note:

1.Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.

2.AC Input Cable,DC O/P Cable,DIM/AUX Power/Programming Cable:
 Peeled length of cable:43±5mm,Tinned length of wire:10±2mm.

INPUT

OUTPUT

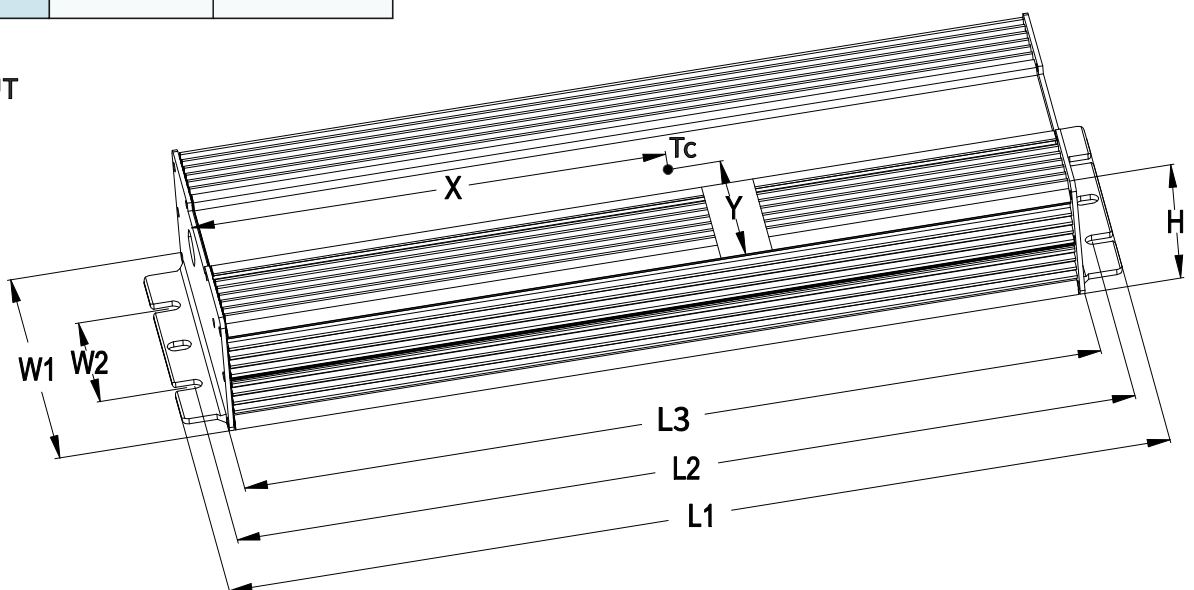

SS-500NP-360XX Series LED Driver



Assembly Tips

1. Please take isolation and waterproof measures if the dimming cable is not in use.
2. The trace routing on aluminum substrates is designed in compliance with creepage distance requirements specified by relevant certification regulations.
3. The creepage distance between LED+ and LED- on the aluminum substrate is designed in compliance with the relevant certification regulations.
4. Minimize the copper area on the aluminum PCB to reduce parasitic capacitance and leakage current.
5. It is recommended to design LED beads in parallel first and then in series.
6. The insulation level of LED light panels should meet the reliability design requirements.
7. It's recommended to add resistors or capacitors in parallel with the LED on PCB to reduce the risk of surge when a non isolated LED driver is used for the luminaire
8. For other precautions, please refer to the "LED Driver User Manual".

Warning

Insufficient or compromised insulation voltage resistance in LED light panels may cause breakdown and short circuits to earth, resulting in damage to the luminaire and LED driver, and posing significant safety hazards. It is recommended to install a residual current device (RCD) during application.

Package

- Outside carton dimension: L×W×H =493mm×385mm×116mm;
- 7PCS/Carton;
- Net weight/Piece: 1.66kg;Gross weight/Carton: 12.87kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

Storage

The product storage meets the standard of the GB 3873-83.
Products should be rechecked if stored for over 1 year before assembly.

RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

Revision History

Version	Description of Update	Updated Date	Remark
V00	Original Release	2023/03/16	
V01	Update Assembly Tips	2024/09/23	
V02	Version Upgrade and Increase CCC Standard	2025/04/30	
V03	Add warning statements	2026/02/28	