



# SOSEN LED Driver, Your Smart Choice

## Specifications

### SS-730VP-56BHB Series LED Driver

Model: SS-730VP-56BHB

Description: 730W LED Driver

Rev.: V01

Release Date: 2021-11-18

# SS-730VP-56BHB Series LED Driver

**SOSEN**  
LED DRIVER



**LED DRIVER**

**VP Series**



## Features:

- Efficiency up to 95.5%
- Dimming: 0-10V,PWM,Resistor
- Dim-to-Off
- Surge Protection: CM: 10kV, DM: 6kV
- Standby Power <1W
- Communication Function With PC
- Protections: SCP/OTP
- Warranty: 5 years

**Class P**



## Description:

SS-730VP-56BHB series are 730W constant current LED Driver with wide O/P voltage range and adjustable O/P current by program. LED luminaries manufactures can easily design luminaries and reduce cost.

### Application:

Plant lighting

## Model List:

Model	AC Input Range	Max. Pout	Vout Range	Full Power Vout Range	Iout	THD(Typ.)	PF(Typ.)	Eff.(Typ.)	Max.Tc
SS-730VP-56BHB	90-305Vac	730W	28-56V	48-56V	1.75-15.2A	8%	0.95	95%	90°C

Note:

- 1.Default Tested: at 220Vac, full load, Ta 25°C.
- 2.The performance of the LED Driver can be guaranteed within the full power Vo range.The voltage lower than full power Vo range, it is need to test the performance with the LED module.

# SS-730VP-56BHB Series LED Driver

## Input Characteristics:

Parameter	Min.	Typ.	Max.	Remark
Rated AC Input Range	108Vac		120Vac	Ta : 40°C
	120Vac		200Vac	Ta : 50°C
	200Vac		277Vac	Ta : 55°C
AC Input Range	90 Vac		305Vac	90-108Vac, 70% load
Input Frequency Range	47Hz	50/60Hz	63Hz	
Max Input Current			8.0A	108Vac, full load
Max Input Power			864W	108Vac, full load
Max Inrush Current(120Vac)			38A	Cold Start
Max Inrush Current(220Vac)			78A	Cold Start
Max Inrush Current(277Vac)			105A	Cold Start
Standby Power			1W	220Vac/50Hz, Dim to off
Power Factor	0.95	0.97		220Vac/50Hz, full load
	0.90			108-277Vac/50Hz, 70-100% load
THD		8%	10%	220Vac/50Hz, full load
			20%	108-277Vac/50Hz, 70-100% load

# SS-730VP-56BHB Series LED Driver

## O/P Characteristics:

Parameter	Min.	Typ.	Max.	Remark
O/P Voltage Range	28V		56V	Power Derated @28-48V
Rated O/P Voltage	48V		56V	$P_o = V_o \cdot I_o = 730W$ , full load
Rated O/P Current	13.04A		15.2A	15.2A for 48V, 13.04A for 56V
Adj. O/P Current (AOC) Range	1.75A		15.2A	By Programming
No Load Voltage			60V	
Efficiency @120Vac	90.5%	92.0%		O/P 56V/13.04A
Efficiency @220Vac	93.5%	95.0%		O/P 56V/13.04A
Efficiency @277Vac	94.0%	95.5%		O/P 56V/13.04A
O/P Current Tolerance	-5%		+5%	
O/P Current Ripple(PK-AV)		5%	10%	Full load
Start-up Current Overshoot			10%	Full load
Start-up Time			0.5S	120Vac, Full load
			0.5S	220Vac, Full load
Line Regulation	-2%		+2%	Full load
Load Regulation	-2%		+2%	
Temperature Coefficient	-0.03%/°C		+0.03%/°C	Tc: 0°C~90°C
OTP	90°C	100°C	110°C	> Tc typ., Current Derating < Tc min., Operates Recovery
Short Circuit Protection			10W	Driver not be damaged, Hiccup mode

# SS-730VP-56BHB Series LED Driver

## Other Characteristics:

Parameter		Min.	Typ.	Max.	Remark
0-10V Dimming (Optional)	Dim Vcc	0V		12V	Negative dimming by programming
	Dim Range	10%Ioset		100%Ioset	DIM+ source current 110uA.
	Rec.Dim Range	0V		10V	Dimming prohibits reverse connection.
PWM Dimming (Optional)	PWM High	9.8V		10.2V	Negative dimming by programming
	PWM Low	0V		0.3V	DIM+ source current 110uA.
	Frequency	1KHz		2KHz	Dimming prohibits reverse connection.
	PWM Duty	0%		100%	
Resistor Dimming (Optional)	Resistance	0K		100K	Negative dimming by programming
	Dim Range	10%		100%	DIM+ source current 110uA.
Knob Dimming (Optional)	Dimming level		0%		Dimming tolerance $\pm 5\%$
			25%		
			50%		
			75%		
			100%		
Dim to Off (Optional)	Dim off	7%	8%	9%	By DC voltage, PWM, resistance dimming ratio
	Dim on	8%	9%	10%	By DC voltage, PWM, resistance dimming ratio
Life Time( $T_c \leq 71^\circ\text{C}$ )		71,000 hours			80% Load
MTBF		198,200 hours			220Vac, full load, $T_a = 25^\circ\text{C}$ (MIL-HDBK-217F)
$T_c$		90 $^\circ\text{C}$			
Warranty		5 years			$T_c : 71^\circ\text{C}$
Net Weight		3300g			
Dimension		440mm*89.5mm*44.5mm 17.32in*3.52in*1.75in			L x W x H

NOTE: 1, All the parameters above are tested  $T_a 25^\circ\text{C}$  and LED load, unless specified.

2. When using resistor dimming (parallel connection of dimming wires), if the number of parallels is: N, the dimming resistor should be realized 0-100% dimming range, resistance value:  $91\text{K}\Omega/\text{N}$ .

# SS-730VP-56BHB Series LED Driver

## Environmental Requirements

Parameter	Min.	Typ.	Max.	Remark
Operating Temperature(Tcase)	-30°C	25°C	+90°C	
Storage Temperature	-30°C	25°C	+90°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4000m	

## Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
UL/cUL	UL8750	✓	
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017		
RCM	AS/NZS61347.2.13		
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		

EMI/EMS	Criterion	Remark
Conduction Emission	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
Radiation Emission	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
Harmonic Current Emissions	IEC/EN 61000-3-2	Class C
Surge	IEC/EN 61000-4-5	DM: 6kV,CM: 10kV,Criterion B
Ring Wave	IEC/EN 61000-4-12	DM: 6kV,CM: 6kV,Criterion B

# SS-730VP-56BHB Series LED Driver

## Safety Test Items:


Safety Test Items	Technical Indicators			Remark
	UL Insulation Requirements	ENEC Insulation Requirements	CCC Insulation Requirements	
Insulation Requirements	UL Insulation Requirements	ENEC Insulation Requirements	CCC Insulation Requirements	
Input-Output	1600Vac	3000Vac	/	Reinforced insulation
Input-Case	1600Vac	1500Vac	/	Basic insulation
Input-Dim	1600Vac	3000Vac	/	Reinforced insulation
Output-Dim	1600Vac	1000Vac	/	Basic insulation
Output-Case	1600Vac	1000Vac	/	Basic insulation
Dim-Case	500Vac	500Vac	/	Basic insulation
Insulation Resistance	≥10MΩ			Input-Output, Test voltage: 500Vdc
Ground Resistance	≤0.1Ω			25A/1min
Leakage Current	≤0.75mA			277Vac

### NOTE:

1. SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference as component.
2. Please short (ACL and ACN), (V+ and V- ) when Hi-pot test.
3. The CCC withstand voltage test needs to disconnect the built-in lightning protection tube. According to the IEC 60598-1:14 standard section 10.2, the "built-in lightning protection tube" can be marked on the nameplate to disconnect the discharge tube on testing.

## Performance Curves:


### Input Inrush Current

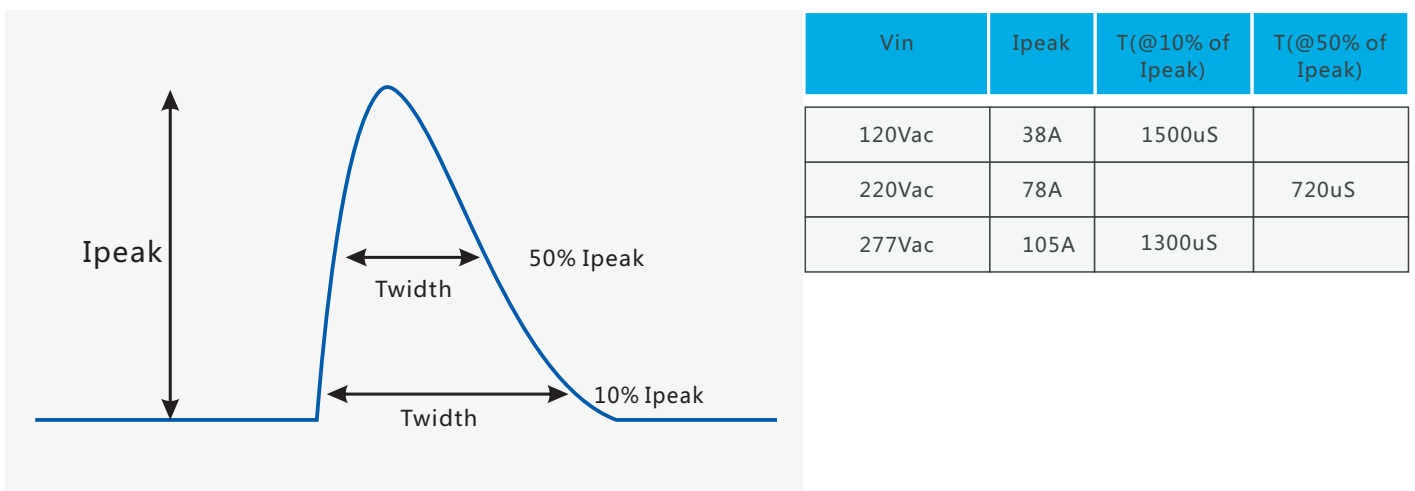

# SS-730VP-56BHB Series LED Driver

## Performance Curves:


O/P Voltage Vs. O/P Current(DIM/AOC Window)

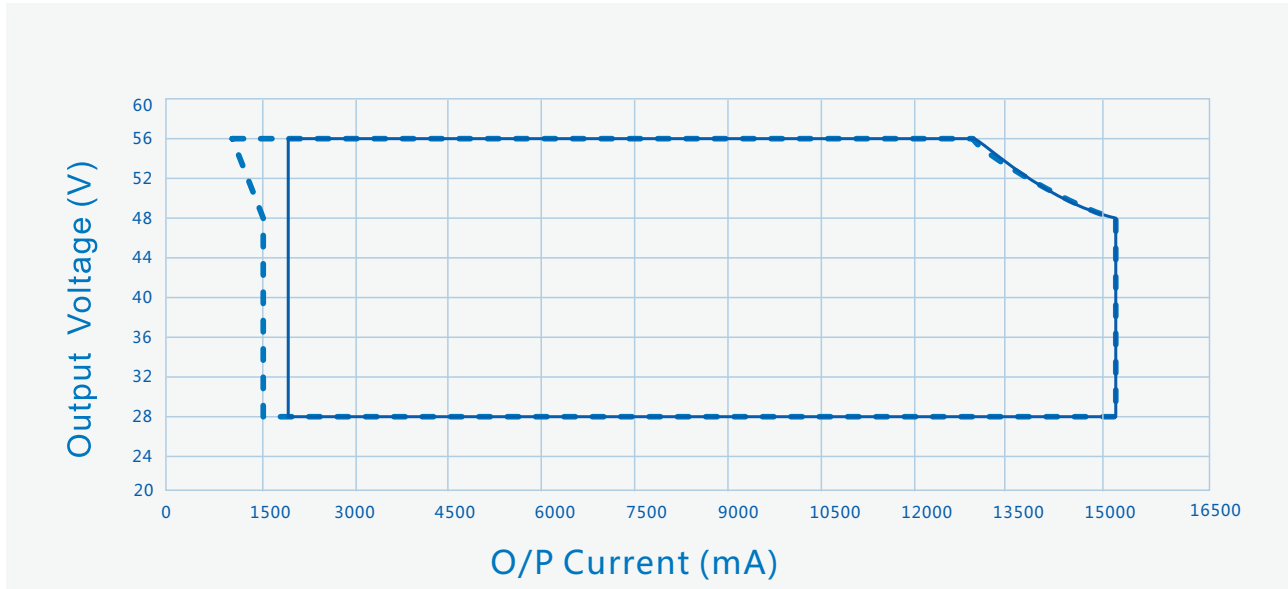

--DIM Window

—AOC Window

Efficiency Vs. O/P Voltage (Vin=120Vac)

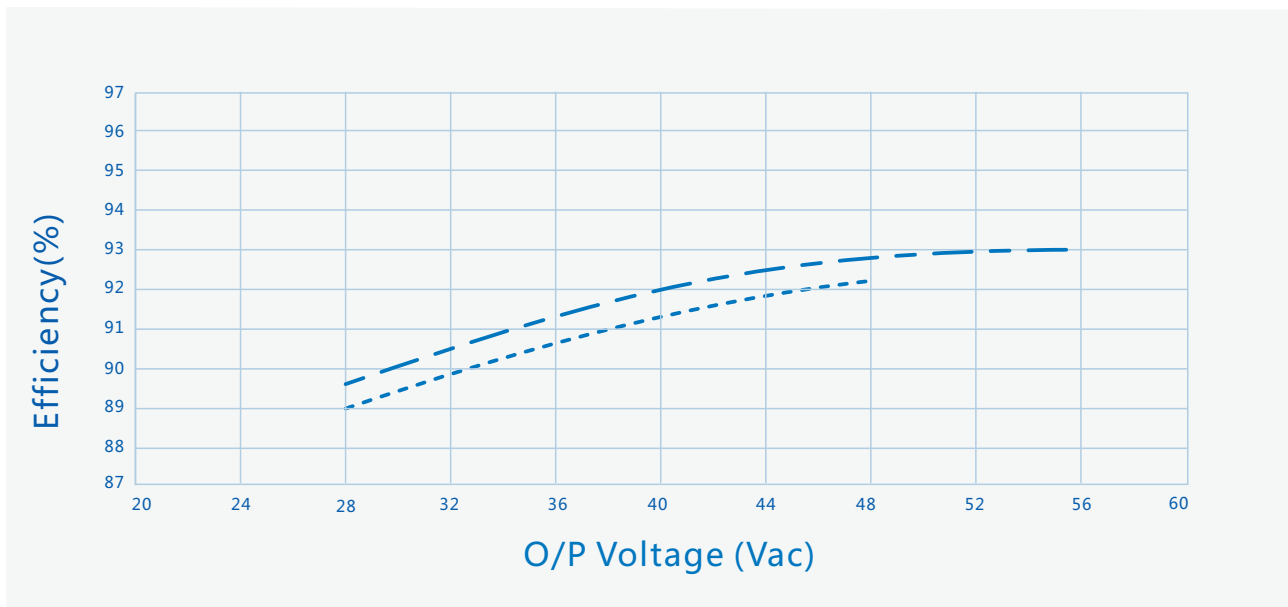

----- Io=15200mA


- - - - Io=13040mA




# SS-730VP-56BHB Series LED Driver

## Performance Curves:

Efficiency Vs. O/P Voltage ( $V_{in}=220V_{ac}$ )

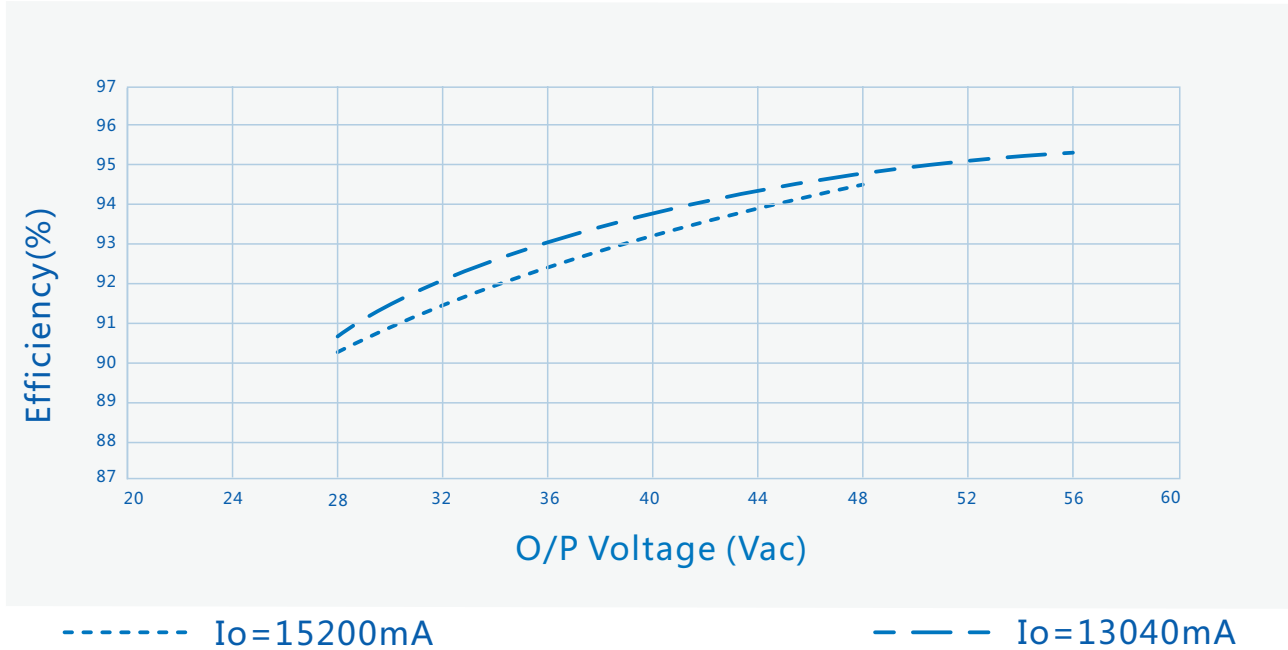


Efficiency Vs. O/P Voltage ( $V_{in}=277V_{ac}$ )

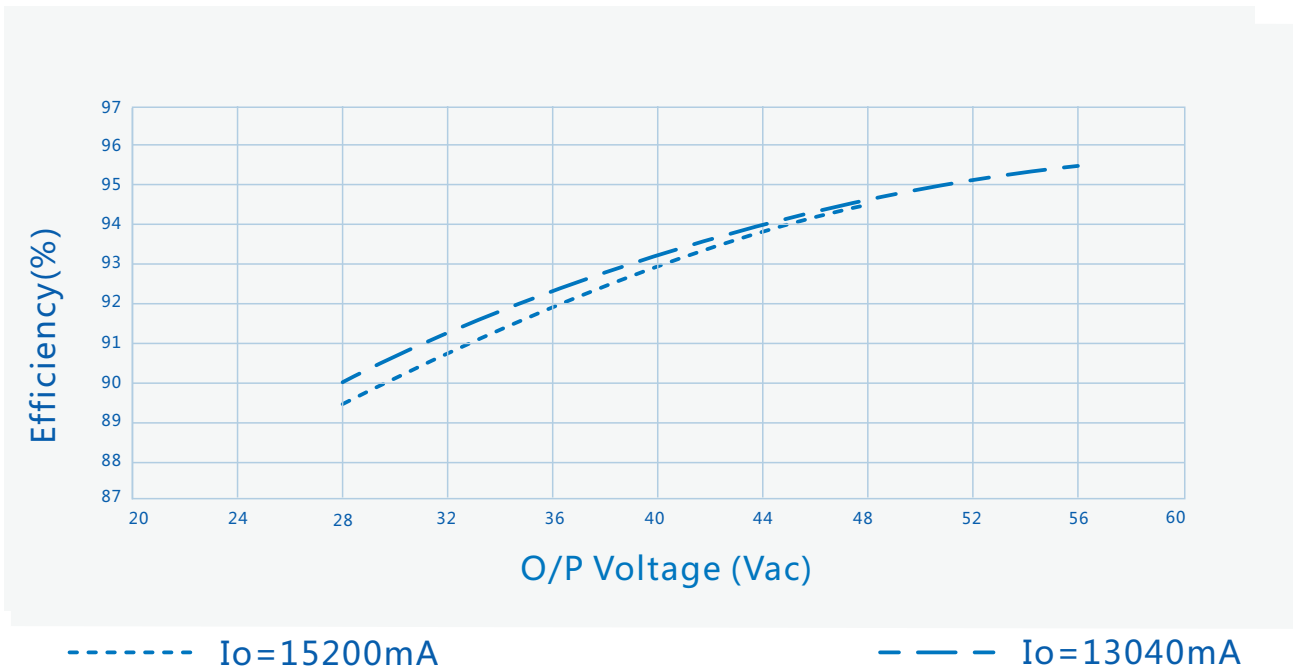

# SS-730VP-56BHB Series LED Driver


## Performance Curves:

### Power Factor Vs. O/P Power

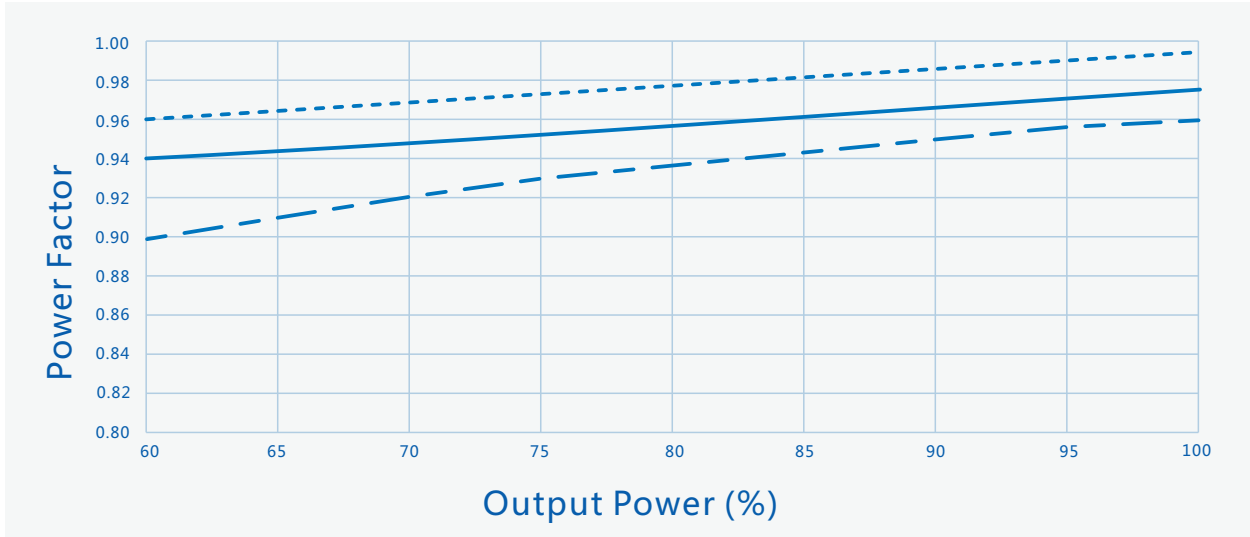

----- Vin=120Vac      ——— Vin=220Vac      - - - Vin=277Vac

### THD Vs. O/P Power

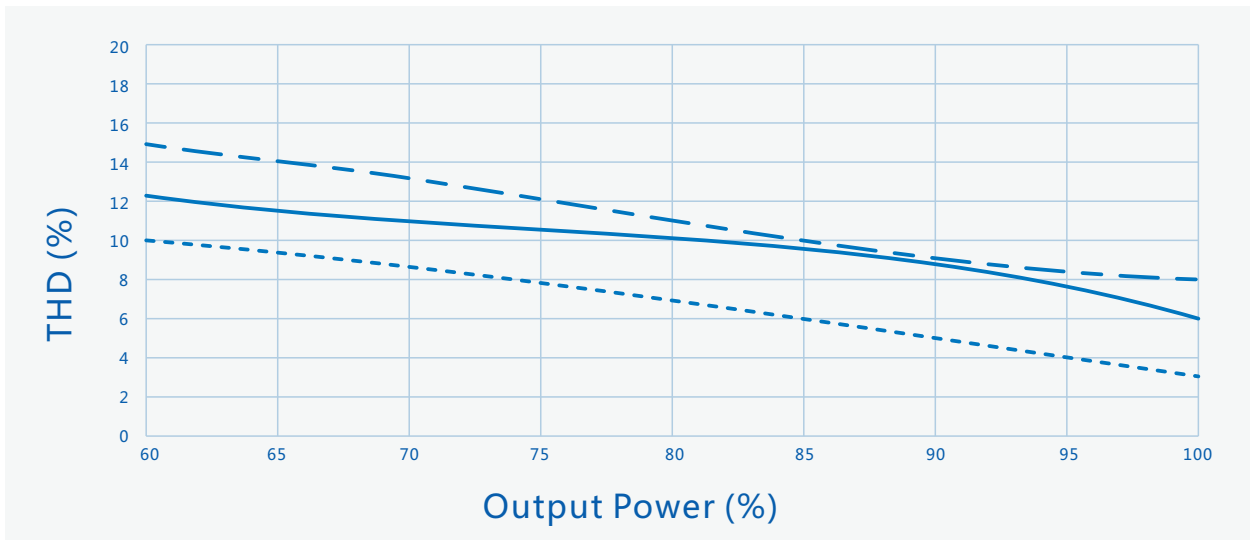


----- Vin=120Vac      ——— Vin=220Vac      - - - Vin=277Vac


# SS-730VP-56BHB Series LED Driver

## Performance Curves:


### O/P Power Vs. Input Voltage

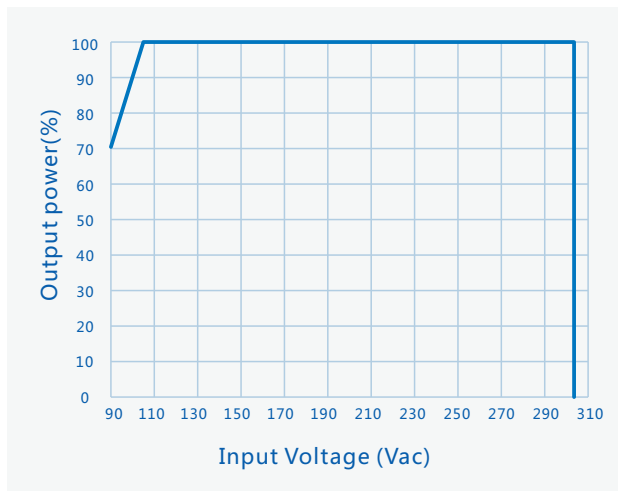


### O/P Power Vs. Case Temperature

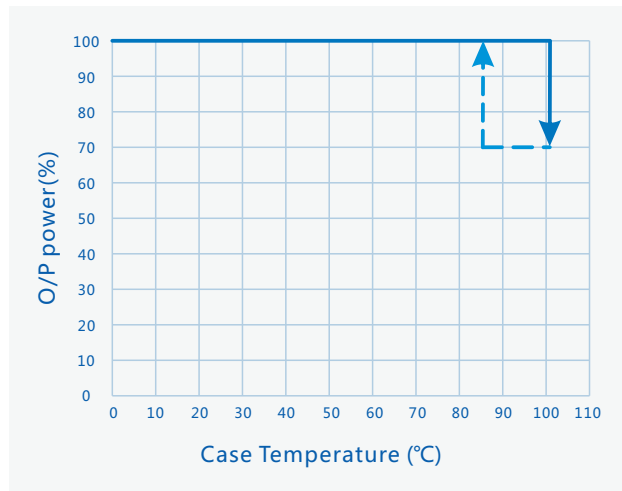

### O/P Power Vs. Dimming

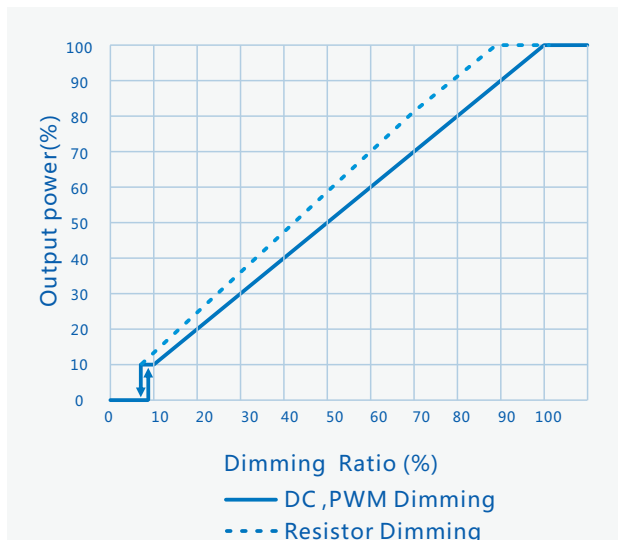


### Life Time Vs. Case Temperature

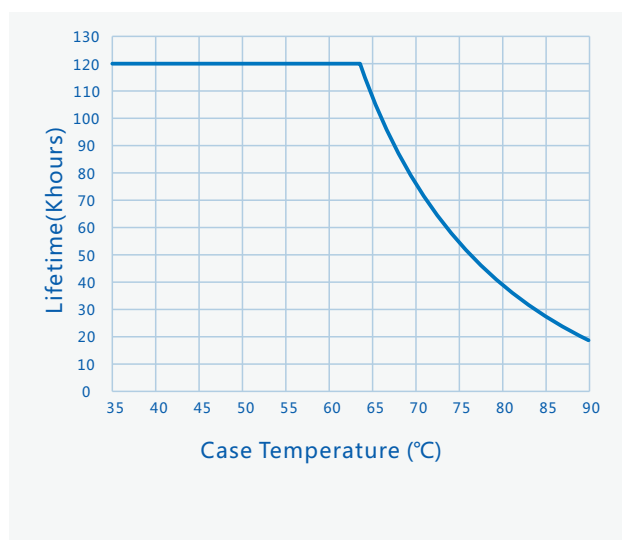

# SS-730VP-56BHB Series LED Driver


## Programming Connection Diagram :

Programming could be completed by off-line mode either without turn on the Driver nor without PC, other than the traditional on-line mode.

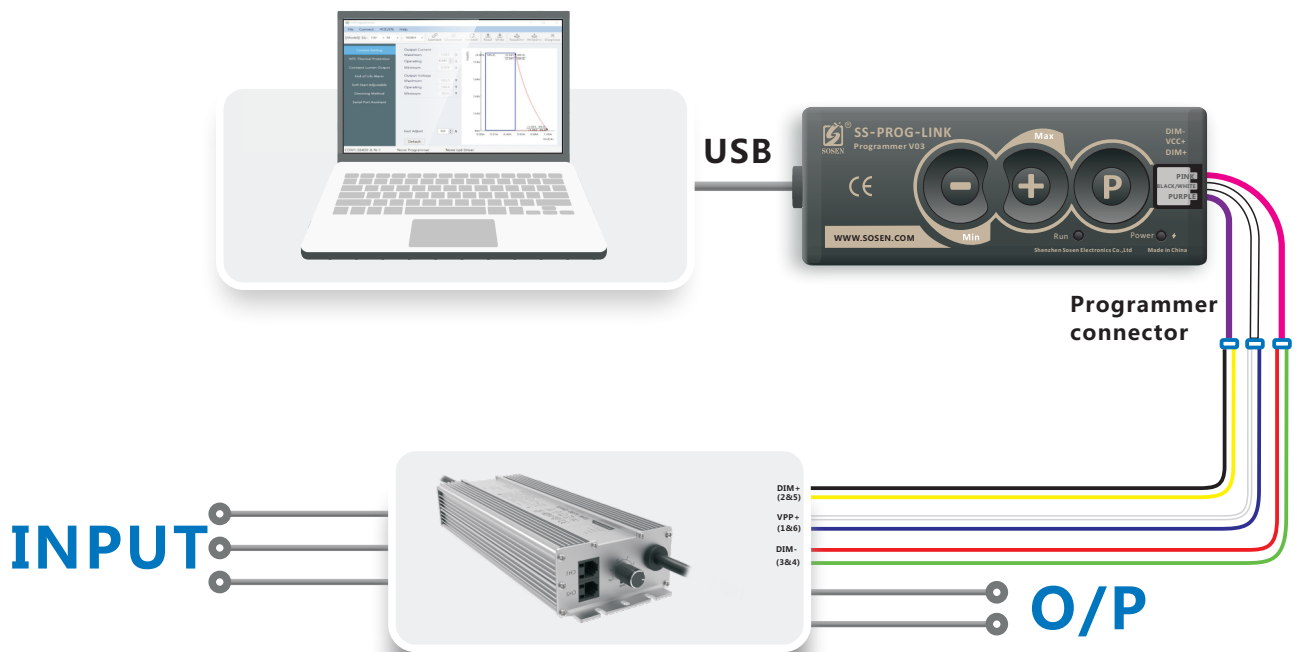

# SS-730VP-56BHB Series LED Driver

## Mechanical Characteristics

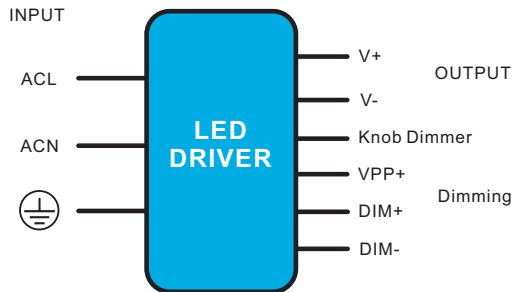

### AC Input Cable(Exposed Length 450±10mm):

Global model: SJOW, 3\*17AWG, O.D: 8.0mm, Brown: L, Blue: N, Yellow/Green:  $\oplus$   
 UL model: SJTW, 3\*16AWG, O.D: 8.5mm, Black:L, White:N, Green:  $\oplus$

### DC O/P Cable(Exposed Length 250±10mm):


Global model: SJOW, 2\*14AWG, O.D: 8.8mm, Brown: V+ , Blue: V-  
 UL model: SJTW, 2\*14AWG, O.D: 9.0mm, Red: V+ , Black: V-

### DIM/AUX Power/Programming Cable:

Knob Dimmer, RJ25 port




PLUG

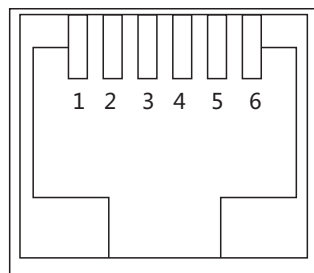

JACK

RJ25 PIN	Definition
1&6	VPP+
2&5	DIM+
3&4	DIM-

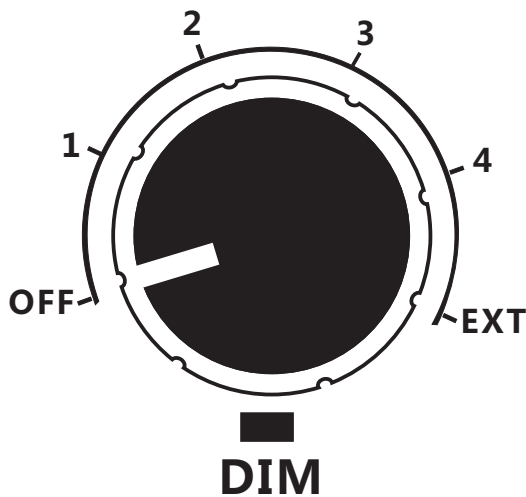

Switch	Definition
OFF	Dim to off
1	25%Ioset
2	50%Ioset
3	75%Ioset
4	100%Ioset
EXT	External Dimming

# SS-730VP-56BHB Series LED Driver


## Mechanical Characteristics

Name Description	Standard Code	mm(In.)
Assembly Length	L1	440(17.32)
Overall Length	L2	426.5(16.79)
Mounting Hole Length	L3	413.2(16.27)
Case Height	H	44.5(1.75)

Note :

- Please follow the "LED Driver User Manual" obtained from SOSEN's official website for assembly.
- AC Input Cable, DC O/P Cable:  
Peeled length of cable:  $43 \pm 5$ mm,  
Tinned length of wire:  $10 \pm 2$ mm

Name Description	Standard Code	mm(In.)
Case Width	W1	89.5(3.52)
Mounting Hole Width	W2	40(1.57)
TC Point Position	X	143(5.63)
TC Point Position	Y	15(0.59)

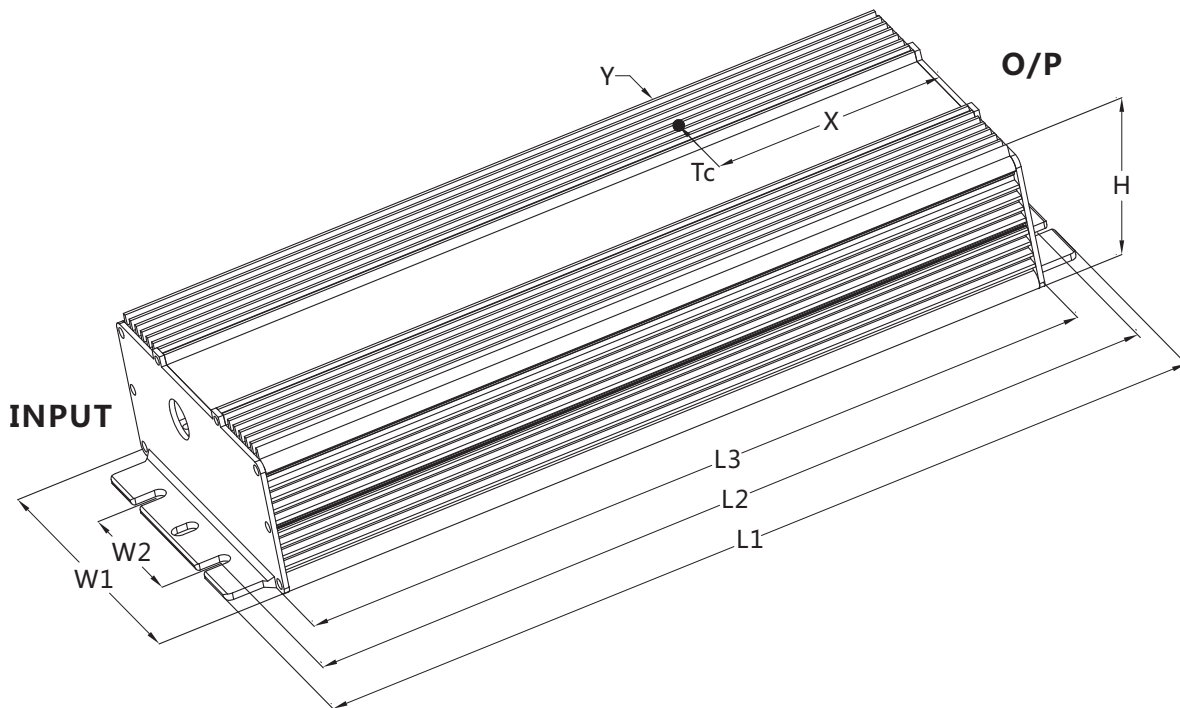

# SS-730VP-56BHB Series LED Driver



## Assembly Tips

1. The RJ25 port is non-waterproof, please pay attention to the damp and wet environment and avoid water entering into the LED driver affecting the normal operation.

## Package

- Outside carton dimension: L×W×H = 577mm×385mm×162mm;
- 5PCS/Carton;
- Net weight/Piece: 3.3kg;Gross weight/Carton: 17.7kg;
- Please refer to the product name, model number, manufacturer identification, QC PASS, manufacturing date on the package.

## Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be avoided direct sunlight and rain, loaded/unloaded with caution.

## Storage

The product storage meets the standard of the GB 3873 - 83.  
Products should be rechecked if stored for over 1 year before assembly.

## RoHS

Products comply with RoHS Directive (2011/65/EU) and amendment 2015/863/EU.

## Revision History

Version	Description of Update	Updated Date	Remark
V00	Original Release	2021/08/26	
V01	Update O.D Of The AC Input Cable	2021/11/18	